

<u>2 E N 2 I I I I I I I I</u>
--------------------------------

FREQUENCY	MIN.	NOM.	MAX.
100 1000 1000	 - 73.0	-71.5 -71.0 -68.5	 - 6 9 . 0 


## DEVICE CONFORMITY

RANGE	OF DEVI	ATION FR	<u>OM IKHz</u>
	- 4 . 0	+	1.0
	0.0		0.0
	-0.5	+	8.5

## NOTES:

- I. ALL TEST DATA TAKEN WITH TEST CIRCUIT SHOWN BELOW.
- 2. CASE CONNECTED TO NEGATIVE TERMINAL USING EXTERNAL JUMPER WIRE.
- 3. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- 4. CONFORMS TO REQUIREMENTS SHOWN ON 'ELECTRET MICROPHONE ENVIRONMENTAL QUALIFICATIONS TEST, EK-PA SHEET 2.2' WITH REF. FREQ. 1000 Hz.
- 5. TYPICAL SENSITIVITY TO HUMIDITY AT 1000 Hz IS 0.02 dB/%RH.
- 6. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.

PORT LOCATION	DC SUPPLY	AMPLIFIER CURRENT DRAIN	SENSITIVITY CHANGE ON REDUCING SUPPLY TO 0.9VDC	"A" WEIGHTED NOISE (I kHz EQUIV. SPL)
K A	1.3V	50 μΑ MAX.	4.0 dB MAX.	40.0 dB MAX.

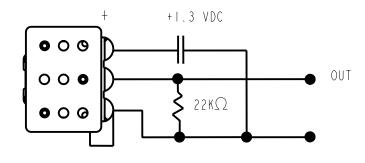

TEST CIRCUIT

Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
D	MI0101478	6 - 5 - 07	Released		D
CRITERIA, (	CORRELATION (		INSPECTION ACCEPTANCE/REJECTION OWLES IS ALSO REQUIRED FOR	DR. BY	DATE 6 - 19 - 0.6

## KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

	N 1651 LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION TERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR MINATION OF EQUIPMENT AND TEST METHOD VARIATION			6-19-06
			CK. BY	DATE
ITLE:	MICROPHONE	EK-26899-P03	GJP	6 - 26 - 06
	MICKOLITORE	Z. 20000 . 00	APP. BY	DATE
	PERFORMANCE SPECIFICATION	SHT 2.1	GJP	6 - 26 - 06

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Knowles:

EK-26899-P03