
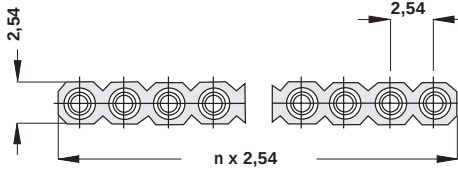

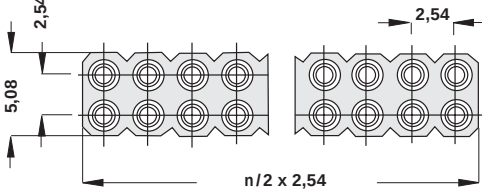



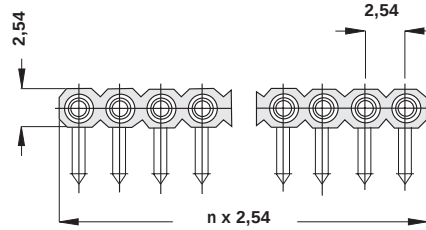

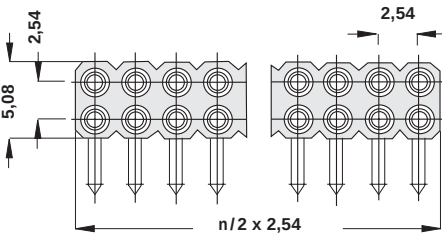


High-precision female headers soldering technique

for 0.635 mm and up to 0.85 mm Ø

art. no.			
BL 5 ...			
art. no.			
BL 6 ...			
art. no.			
BL KG 3 ...			
art. no.			
BL 7 ...			
please indicate:	... no. of contacts one row 1 - 36 two rows 2 - 72 three rows 9 - 96		
art. no.			
BL 8 ...			
please indicate:	... no. of contacts two rows 4 - 72		

contact shell surface: tin-plated

contact spring: gold-plated

BL 8 ...: packing (option) bar magazine (min. 6 contacts)

No capillary action when soldering due to protected contact insert.

V-notches permit breaking! Therefore any required number of contacts is available.

Female headers 2.00 solder

Female headers 2.00 SMD

Technical data

High-precision female headers

→ G 54

→ G 58

→ G 72 - 76

→ G 3 - 5

Male headers 2.00 solder

Male headers 2.54 solder

Male headers 2.54 SMD

→ G 51 - 53

→ G 8

→ G 36 - 40

G 30

A

B

C

D

E

F

G

H

I

K

L

M

N