


Features

- Ideally Suited for Automatic Insertion
- For Switching and AF Amplifier Applications
- Ultra-Small Surface Mount Package
- **Also Available in Lead Free/RoHS Compliant Version (Note 2)**

Mechanical Data

- Case: SOT-363
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe). Please see Ordering Information, Note 5, on Page 2
- Terminal Connections: See Diagram
- Marking: K1F (See Page 2)
- Weight: 0.006 grams
- Ordering & Date Code Information: See Page 2

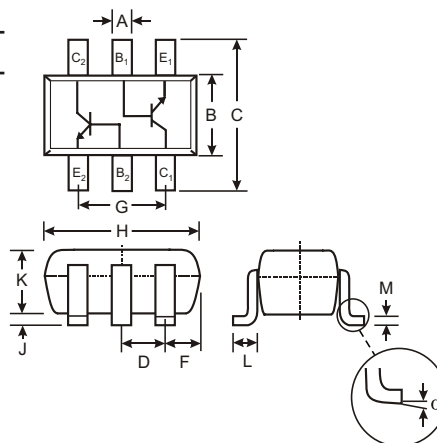

SOT-363		
Dim	Min	Max
A	0.10	0.30
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
F	0.30	0.40
H	1.80	2.20
J	—	0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.25
α	8°	
All Dimensions in mm		

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V_{CB0}	50	V
Collector-Emitter Voltage	V_{CE0}	45	V
Emitter-Base Voltage	V_{EB0}	5.0	V
Collector Current	I_C	100	mA
Peak Collector Current	I_{CM}	200	mA
Peak Base Current	I_{BM}	200	mA
Power Dissipation (Note 1)	P_d	200	mW
Thermal Resistance, Junction to Ambient (Note 1)	$R_{\theta JA}$	500	$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +150	$^\circ\text{C}$

- Notes:
1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
 2. No purposefully added lead

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
DC Current Gain (Note 3)	h _{FE}	200	—	450	—	V _{CE} = 5.0V, I _C = 2.0mA
Collector-Emitter Saturation Voltage (Note 3)	V _{CE(SAT)}	—	—	100 400	mV	I _C = 10mA, I _B = 0.5mA I _C = 100mA, I _B = 5.0mA
Base-Emitter Saturation Voltage (Note 3)	V _{BE(SAT)}	—	755	—	mV	I _C = 10mA, I _B = 0.5mA
Base-Emitter Voltage (Note 3)	V _{BE}	580	665	700	mV	V _{CE} = 5.0V, I _C = 2.0mA
Collector Cutoff Current (Note 3)	I _{CBO}	—	—	15 5.0	nA μA	V _{CB} = 30V, I _E = 0 V _{CB} = 30V, T _j = 125°C
Emitter Cutoff Current (Note 3)	I _{EBO}	—	—	100	nA	V _{EB} = 5.0V, I _C = 0
Gain Bandwidth Product	f _T	100	—	—	MHz	V _{CE} = 5.0V, I _C = 10mA, f = 100MHz
Collector-Base Capacitance	C _{CBO}	—	—	1.5	pF	V _{CB} = 10V, f = 1.0MHz
Emitter-Base Capacitance	C _{EBO}	—	11	—	pF	V _{EB} = 0.5V, f = 1.0MHz


Ordering Information (Note 4)

Device	Packaging	Shipping
BC847BS-7	SOT-363	3000/Tape & Reel

Notes: 3. Short duration pulse test used to minimize self-heating effect.

4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

5. For Lead Free/RoHS Compliant version part number, please add "-F" suffix to the part number above. Example: BC847BS-7-F.

Marking Information


K1F = Product Type Marking Code

YM = Date Code Marking

Y = Year ex: N = 2002

M = Month ex: 9 = September

Date Code Key

Year	1998	1999	2000	2001	2002	2003	2004
Code	J	K	L	M	N	P	R

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

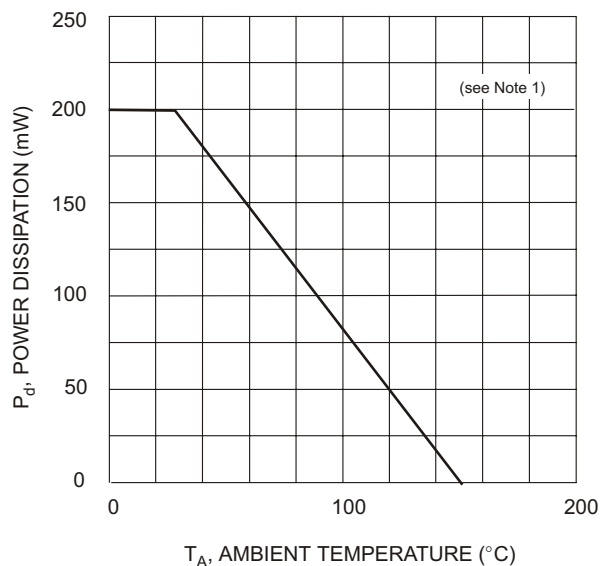


Fig. 1, Power Derating Curve

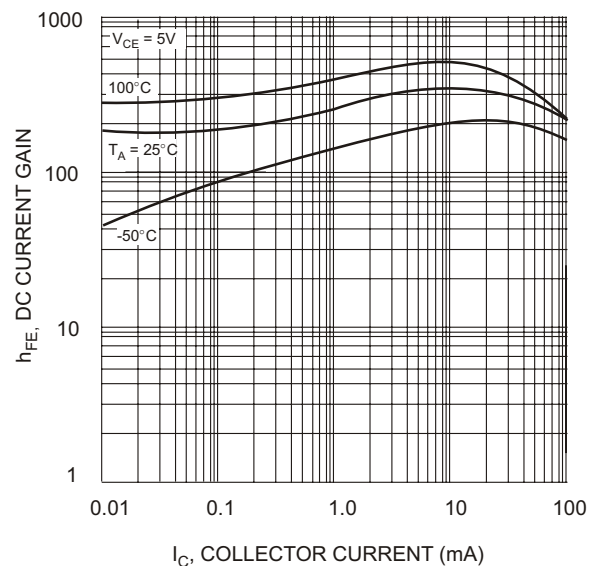


Fig. 2, DC Current Gain vs. Collector Current

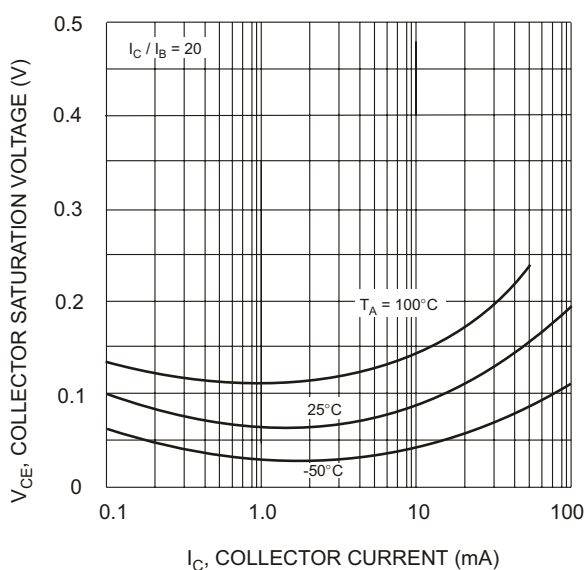


Fig. 3, Collector Saturation Voltage vs. Collector Current

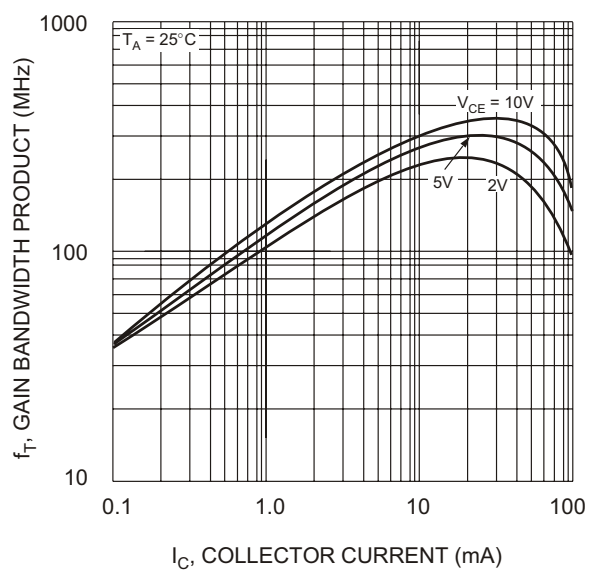


Fig. 4, Gain Bandwidth Product vs. Collector Current

Notes: 1. Device mounted on FR4 printed circuit board.