

**RIDERSERIES
RCL424060****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



TERMSERIES accessories include:

- Spare relay
- Base
- Partition plates
- Cross-connections
- Power-feed modules

General ordering data

Order No.	4058760000
Type	RCL424060
Version	RIDERSERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 60 V DC, Continuous current: 8 A, Plug-in connection
GTIN (EAN)	4032248412662
Qty.	20 pc(s).

RIDERSERIES
RCL424060

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Ratings

Conductor connection system	Plug-in connection	Humidity	40 °C / 93 % rel. humidity, no condensation
Weight	13 g	UL 94 flammability rating	V-0
Ambient temperature	-40 °C...+85 °C		

Dimensions and weights

Width	12.7 mm	Height	29 mm
Depth	15.7 mm	Weight	13 g
Net weight	12 g		

Temperatures

Operating temperature	-40 °C...+70 °C	Ambient temperature	-40 °C...+85 °C
Storage temperature	-40 °C...+85 °C		

Input

Rated control voltage	60 V DC	Rated current DC	7 mA
Coil resistance	8,300 $\Omega \pm 12\%$	Power rating	420 mW
Pull-in (sparkover) / drop-out voltage DC coil	45.0 V / 6.0 V		

Output

Rated switching voltage	250 V AC	Continuous current	8 A
making current	15 A / 4 s	Max. switching power	2000 VA
Switch-on delay	≤ 8 ms	Switch-off delay	≤ 6 ms
Duration of Bounce	Shutter/break contact element: typ. 1/3ms	Min. switching power	100 mA / 5 V, 10 V / 10 mA, 24 V / 1 mA
Max. switching frequency at rated load	0.1 Hz		

Contact specifications

No. of contacts	2	Contact design	CO contact
Contact material	AgNi 90/10	Mechanical service life	AC coil 5×10^6 Switching cycles, DC coil 30×10^6 Switching cycles

Insulation coordination

Rated voltage	250 V	Clearance and creepage distances for control side - load side	≥ 10 mm
Dielectric strength for control side - load side	5 kV _{eff} / 1min	Protection degree	IP 20
Insulating material group	IIIa		

Other technical data

Version	Relay	Free-wheel diode	No
---------	-------	------------------	----

Further details of approvals / standards

Standards	IEC 61810-1, UL508
-----------	--------------------

RIDERSERIES
RCL424060

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Classifications**

ETIM 2.0	EC001437	ETIM 3.0	EC001437
UNSPSC	30-21-19-17	eClass 4.1	40-02-06-14
eClass 5.1	27-37-16-01	eClass 6.0	27-37-16-01
eClass 7.0	27-37-16-01		

Approvals

Approvals



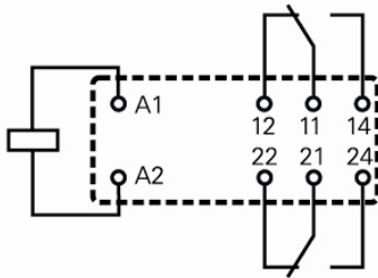
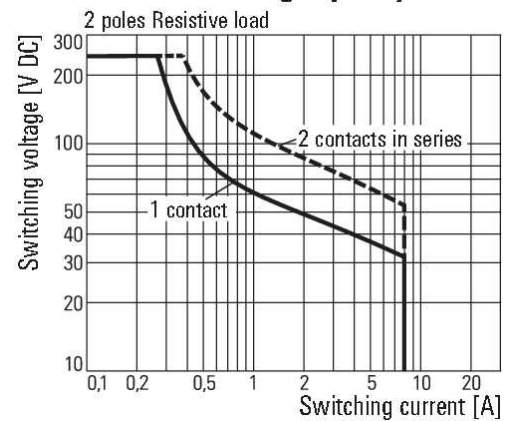
RIDERSERIES
RCL424060

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

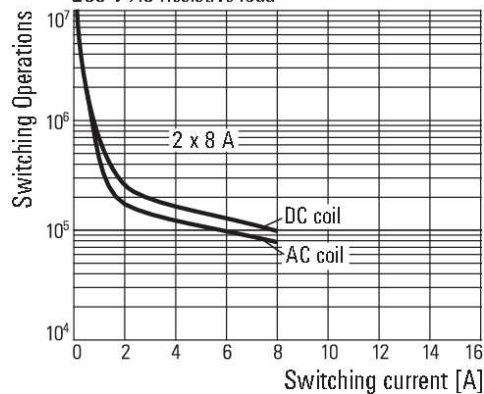
Drawings
Circuit diagram

View on pins

2 C/O changeover contacts


DC load breaking capacity

Electrical endurance

250 V AC Resistive load



RIDERSERIES
RCL424060

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (fully pluggable)
Tension clamp connection


TERMSERIES accessories include:

- Spare relay
- Base
- Partition plates
- Cross-connections
- Power-feed modules

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.
1124130000	TRZ 60VUC 2CO EMPTY	TERMSERIES, Relay base, Continuous current: 10 A, Tension clamp connection	4032248905584	10 pc(s).

Base


Relay base for RIDERSERIES RCL relays

- Screw and tension clamp connection
- Standard and low heights
- Plug-in frame for PCB connections

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.
8693930000	SRC 2CO N	RIDERSERIES, Relay base, Screw connection	4032248365418	10 pc(s).

RIDERSERIES RCL424060

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (fully pluggable)

Screw connection



TERMSERIES accessories include:

- Spare relay
- Base
- Partition plates
- Cross-connections
- Power-feed modules

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.
1124010000	TRS 60VUC 2CO EMPTY	TERMSERIES, Relay base, Continuous current: 10 A, Screw connection	4032248905898	10 pc(s).

Base



- Coupling relay with positively driven contacts: for monitoring signals within safety-critical circuits
- Relays with positively driven contacts have a 99% diagnostics coverage and an excellent reputation for use in safety systems.
- The contacts interlock with each other in order to ensure a synchronous switching status between both contacts. This guarantees that the alert contact will maintain the same switching status in the event of an error (for example, if the working contact melts from an overload).

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.
8783930000	SRC 2CO Z	RIDERSERIES, Relay base, Tension clamp connection	4032248471430	10 pc(s).
8690830000	SRC 2CO	RIDERSERIES, Relay base, Screw connection	4032248361519	10 pc(s).

**RIDERSERIES
RCL424060****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Mating connector (fully pluggable)**Base**

Relay base for the RIDERSERIES RCI relays

- 1 and 2 CO contacts
- Screw and PUSH IN connection
- Standard and low heights

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.
8869500000	SRC-I 2CO P	RIDERSERIES, Relay base, Continuous current: 16 A ⁽¹⁾ , 8 A, PUSH IN spring connection	4032248614455	10 pc(s).