THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – –, .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| — | — |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | CU9 | REVISED PER ECR-17-018702 | 03JAN2018 | GG | TD |

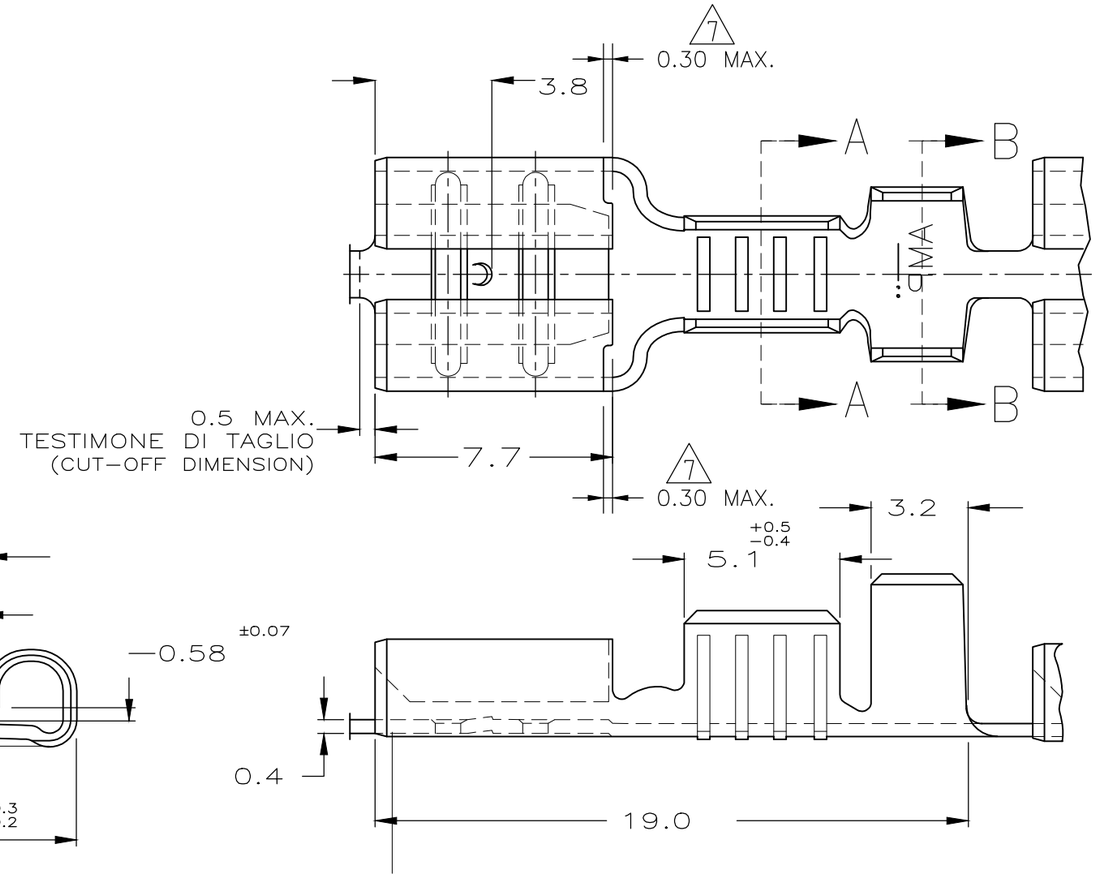


for 0.8 mm tab thickness.

1) STATO DI FORNITURA – SCALA 1:1
(SUPPLY CONDITION – SCALE 1:1)




SENSO DI USCITA DEL TERMINALE DALLA BOBINA
(DIRECTION OFF TOP OF REEL)

2) SPECIFICA DI PRODOTTO 108–20019
(PRODUCT SPEC. 108–20019)
SPECIFICA DI APPLICAZIONE 114–20023
(APPLICATION SPEC. 114–20023).

3) PER LE VERSIONI IN PEZZI SCIOLTI VEDERE DISEGNO 160304
(FOR LOOSE PIECE VERSION SEE DRAWING 160304).

4) 115–16–1, GIUNZIONE MEDIANTE SALDATURA
(115–16–1, SPLICE FREE).

5 BOBINATO CON CARTA INTERPOSTA
(REELED WITH INTERLEAVE PAPER STRIP).

6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

7 STEP IS ALLOWED BY 0.3mm MAX.
IT DOES NOT HAVE IMPACT ON PRODUCT FUNCTIONALITY.

SEZIONE A–A
(SECTION A–A)




SEZIONE B–B
(SECTION B–B)

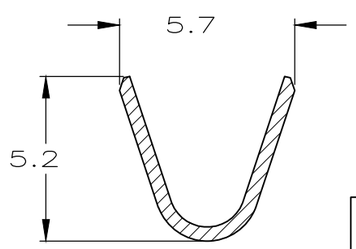


| | | | | |
|---|---|---|---|---|
| 5 | STAGNATO (TIN PLATED) | BRONZO FOS. (PH. BRONZE) | 9–160256–9 | CU9 |
| 5 | NUDO (UNPLATED) | BRONZO FOS. (PH. BRONZE) | 4–160256–9 | CU |
| | ARGENTATO (SILVER PLATED) | OTTONE (BRASS) | 4–160256–7 | CU |
| | NUDO (UNPLATED) | BRONZO FOS. (PH. BRONZE) | 4–160256–5 | CT |
| 5 | PRE NICHELATO (PRE NICKEL PLATED) | ACCIAIO (STEEL) | 4–160256–2 | CT |
| | STAGNATO (TIN PLATED) | BRONZO FOS. (PH. BRONZE) | 3–160256–1 | CT |
| | NUDO (UNPLATED) | BRONZO FOS. (PH. BRONZE) | 2–160256–8 | CT |
| 5 | STAGNATO (TIN PLATED) | OTTONE (BRASS) | 2–160256–2 | CU |
| | NUDO (UNPLATED) | OTTONE (BRASS) | 2–160256–1 | CT |
| | PRE NICHELATO (PRE NICKEL PLATED) | ACCIAIO (STEEL) | 0–160256–5 | CT |
| NOTE | FINITURA / COLORE (FINISH / COLOUR) | MATERIALE (MATERIAL) | NUMERO (PART NO) | REV |

6 OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± 0.3
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± 2°

| DIAM. ISOLANTE (INS. DIA. RANGE) | RANGO FILO (WIRE RANGE) |
|---|---|
| 3.0–4.3mm DIA. | 1.0–2.5 mm2 |

MATERIAL: –
FINISH: –

DWN H. YAALI 27 JAN 2000
CHK C. TARTARI 27 JAN 2000
APVD —
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT

TE Connectivity

NAME: FASTON® Connector, .250 sr. REC. CONTACT.

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A3 | 00779 | C-160256 | — |

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV CU9