

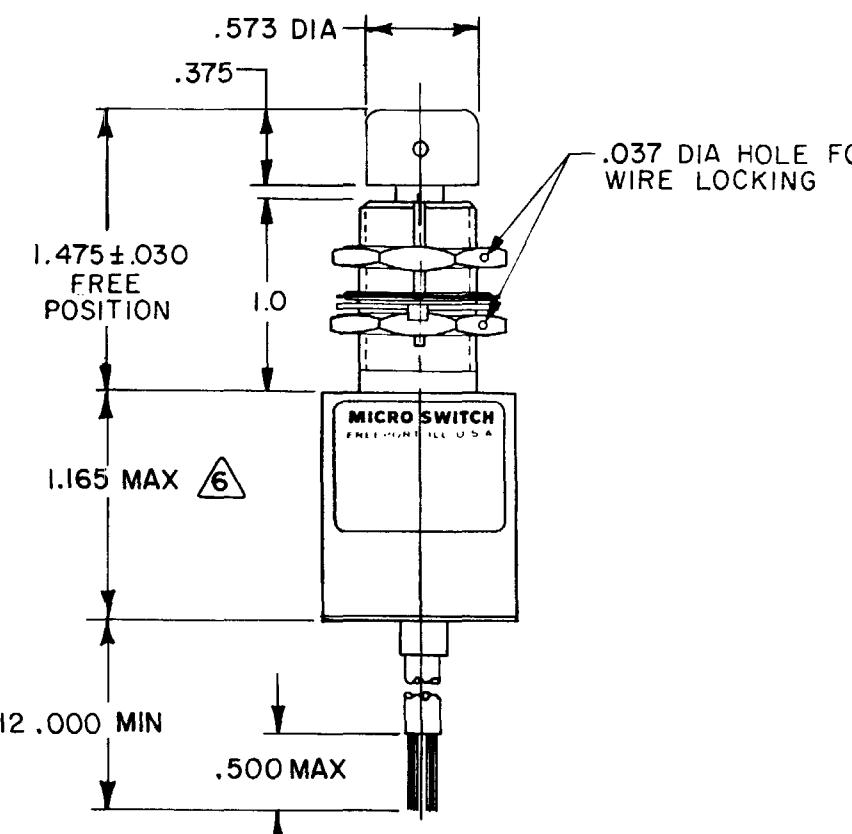


16 M 1EN531-1B DRAWING NUMBER
ISSUE 16
PAGE 1 OF 1
RELEASE NO. PR - 434
REPLACES

REVISIONS
A C044351
WJM 21 JUN 79
B C047573
J A P 5 AUG 80
C C066712
T J O 21 DEC 89
D C094480
D L T 26 MAR 99

FORMTEK
FO-5251-A
DRAWN 21 JUN 79
WJM

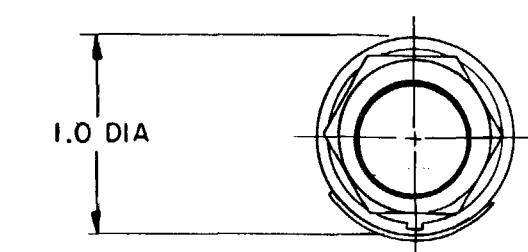

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY
OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT
TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

TOLERANCES

DIM. TOL. DIM. TOL.

mm mm/in in mm/in

NO PLACES X 1/.04

ONE PLACE X, X 0.4/.016

TWO PLACES X, XX 0.15/.006

THREE PLACES X, XXX 0.38/.015

ANGLES X, XXX 0.13/.005

DESIGN UNITS SI METRIC US CUSTOMARY


RAW MATERIAL-COMMERCIAL STANDARD

MICRO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE MET BEFORE
PROTECTIVE COATINGS ARE APPLIED

WEIGHT 4.7 OZ MAX

CIRCUIT DIAGRAM

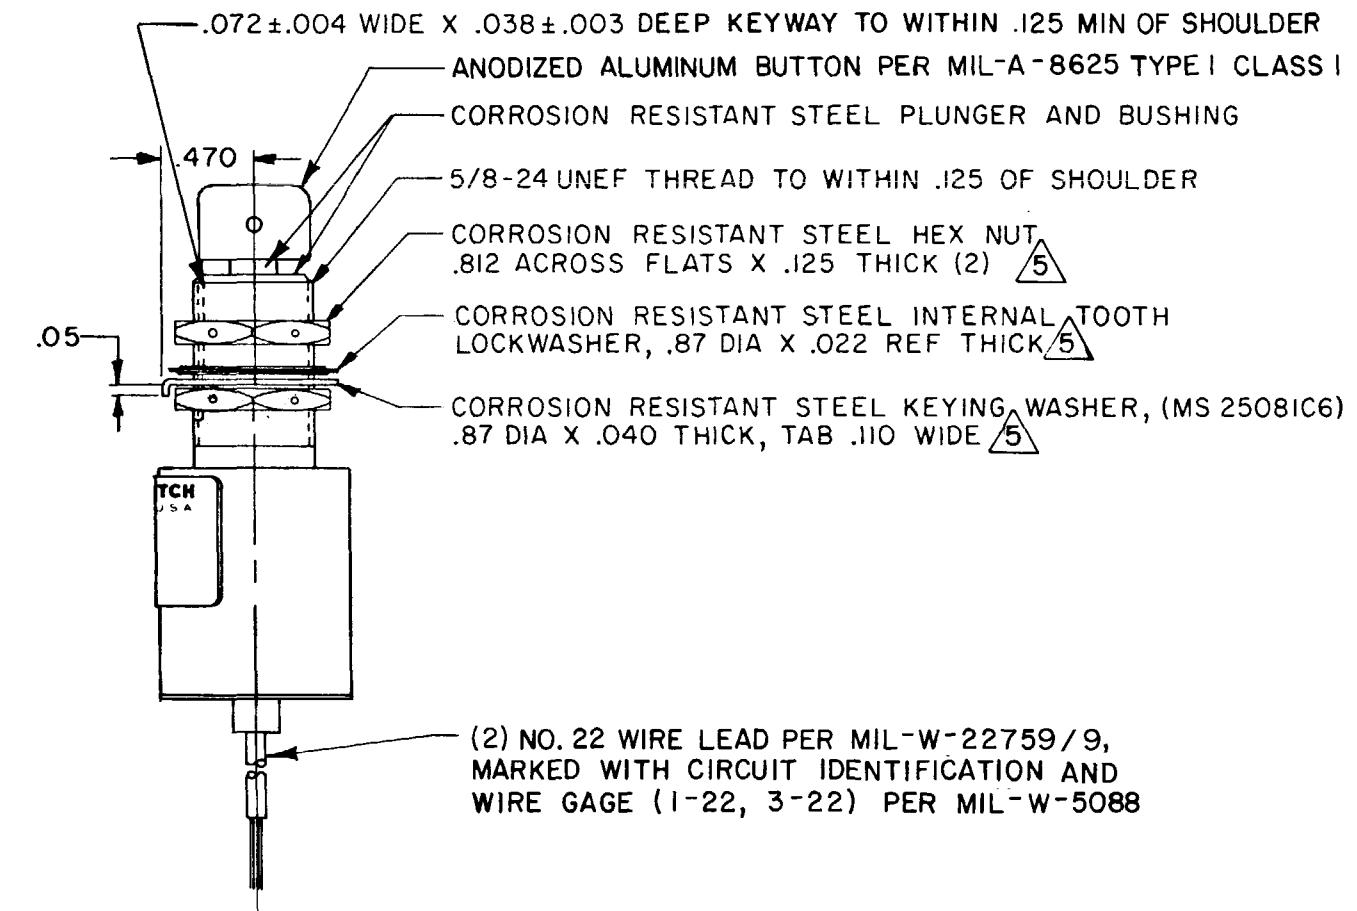

NOTES

- 1 - CORROSION RESISTANT STEEL ENCLOSURE
- 2 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
- 3 - CIRCUIT DIAGRAM, CAT. LIST., FED. MFG. CODE, DATE CODE AND CUSTOMER PART NO. 10655-1 ARE SHOWN ON NAMEPLATE
- 4 - RECOMMENDED FOR MANUAL OPERATION ONLY
- 5 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805
- 6 - THIS DIMENSION EXCLUDES THE RESILIENT POTTING MATERIAL ON THE BOTTOM OF SWITCH

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[1EN531-1B](#)