




Features:

- In compliance with EN 60309-1 and EN 60309-2 standards
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- Enclosure colour coded according to the operating voltage, top entry with threaded grommet (replaceable with cable gland)

Specifications:

Series	: PE16_sm
Gender	: Plug
Connector Mounting	: Panel
Contact Termination	: Screw
Connector Type	: Standard Power Entry
Mounting Type	: Wall
No. of Outlets	: 1

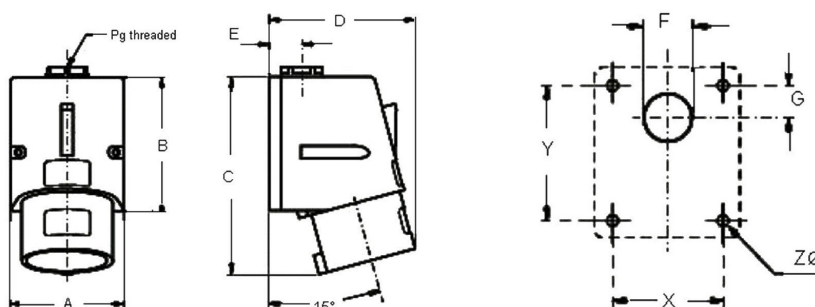

20mm Hole Diameter on 16A
25mm Hole Diameter on 32A

Dimensions

Current Rating (A)	Poles	A	B	C	D	E	F	G	X	Y	ZØ	PgØ
16	2P + \perp	70	82	115	75	20	23	16	53	65	4.5	16
	3P + \perp			117								
	3P + N + \perp			121	90							
32	2P + \perp	86	104	145	95	24	29	17	61	79	6.5	21
	3P + \perp											
	3P + N + \perp			147								

Dimensions : Millimetres

Part Number Table

Description	No. of Positions	Part Number
Inlet, 240V, Wall Mount	2P + E	PE1663SMB
Inlet, 415V, Wall Mount	3P + N + E	PE1665SMB
Inlet, 240V, Wall Mount	2P + E	PE3263SMB
Inlet, 415V, Wall Mount	3P + N + E	PE3265SMB

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.