




Type 101



Type 15

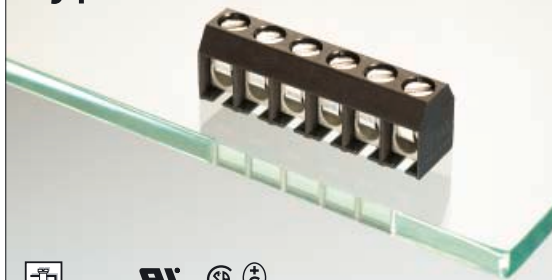

79

Description Type 101

Screw type terminal block, solderable, centerline 5.08 mm / 0.200 inch, wire entry horizontal, wire protector

Technical Data Type 101

V / A / AWG	300 / 15 / 28 - 14	
V / A / AWG	300 / 15 / 28 - 14	
0.08 - 1.5 mm ²	125 V / 2.5 kV / 3 / 13 A	


Wire diameter single wire 0.3 - 1.6 mm
0.012 - 0.063 in.

Insulation co-ordination according to IEC 60664-1

Clearance and creepage distance $\geq$ 2.7 mm / 0.106 in.

Wire strip length	6 mm / 0.236 in.
Screw torque	max. 0.5 Nm / 7 lbs.-in
Solder pin	$\varnothing$ 0.9 mm / $\varnothing$ 0.035 in. recommended pc board hole dia. 1.2 mm / 0.047 in.
Solder pin length	3.8 mm / 0.149 in.
Pole size	2 - 10
Colour	black

Dimensions in mm 1 mm = 0.039 in.



L = (pole size - 1) x centerline + 5.08 mm / 0.200 in.

Description Type 15

Screw type terminal block, solderable, centerline 5.08 mm / 0.200 inch, wire entry horizontal, lift system, modular

Technical Data Type 15

V / A / AWG	300 / 15 / 22 - 14	
V / A / AWG	300 / 15 / 22 - 14	
0.08 - 1.5 mm ²	250 V / 4 kV / 3 / 13 A	


Wire diameter single wire 0.3 - 2 mm
0.012 - 0.079 in.

Insulation co-ordination according to IEC 60664-1

Clearance and creepage distance $\geq$ 3.9 mm / 0.154 in.

Wire strip length	7 mm / 0.276 in.
Screw torque	max. 0.5 Nm / 8 lbs.-in
Solder pin	0.8 x 1 mm 0.031 x 0.039 in. recommended pc board hole dia. 1.4 mm / 0.055 in.
Solder pin length	4.1 mm / 0.161 in.
Pole size	2, 3
Colour	black

Dimensions in mm 1 mm = 0.039 in.



L = (pole size - 1) x centerline + 5.08 mm / 0.200 in.

Type 101 centerline 5.08 mm / 0.200 in.

P/N 311011 02 03 04 05 06 07
08 09 10 (pole size)
- complete the part number by adding the pole size.
- other pole sizes consult factory.

Type 15 centerline 5.08 mm / 0.200 in.

P/N 310151 02 03 (pole size)
- complete the part number by adding the pole size.
- other pole sizes consult factory.