

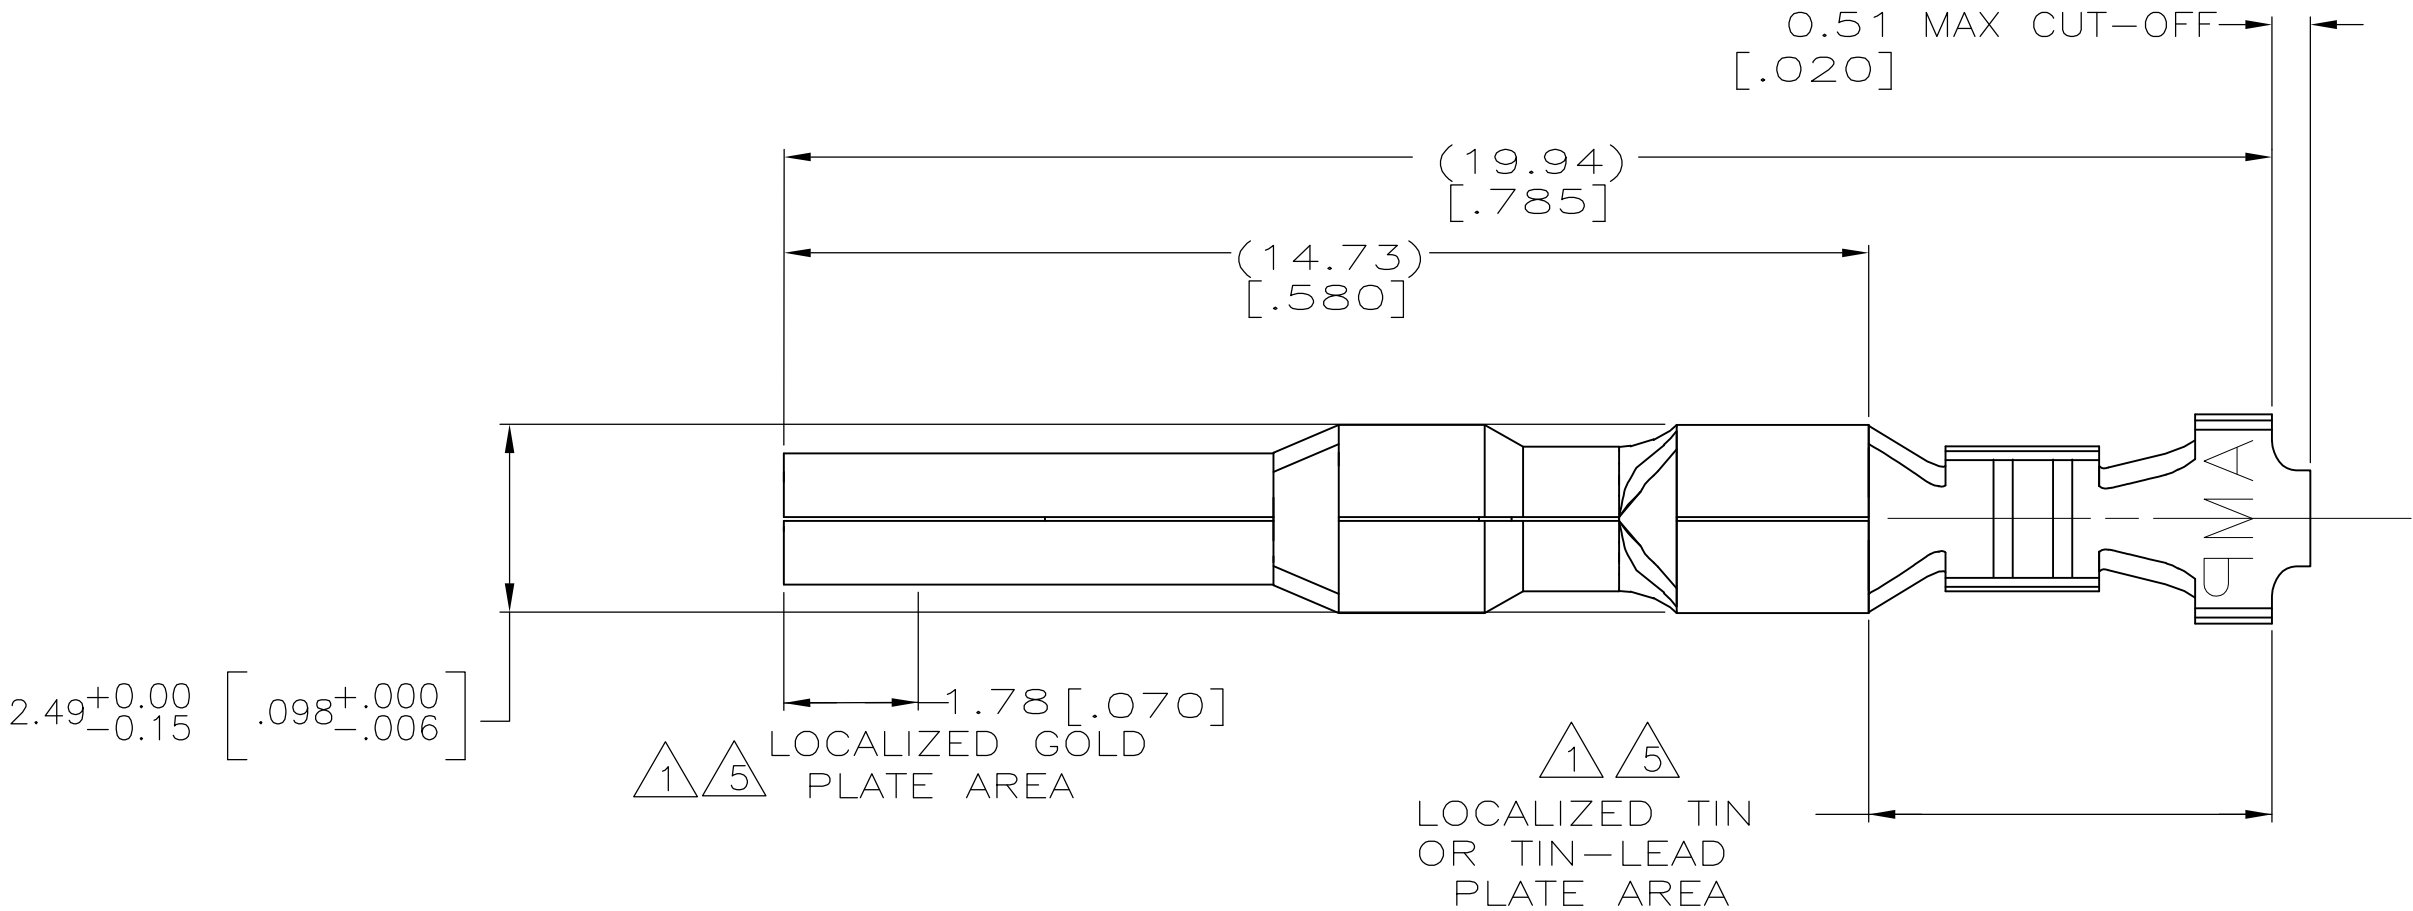

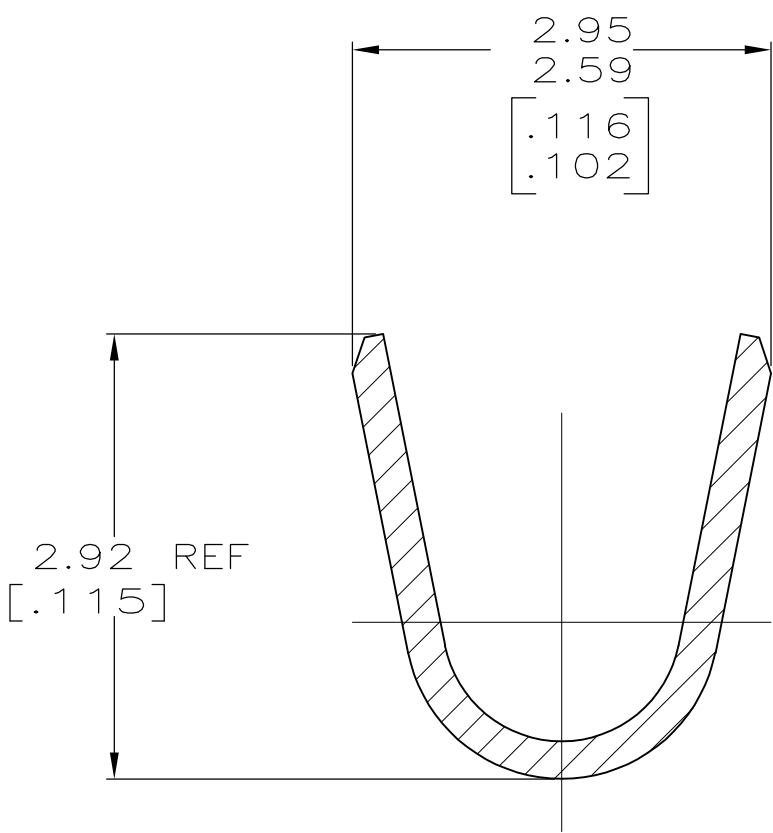


LOC		DIST		REVISIONS					
CM		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					E	REVISED PER EC 0G3B-0231-05	04MAR05	KW	CJ
					E1	REVISED PER ECR-14-000999	25JUL14	GK	KD

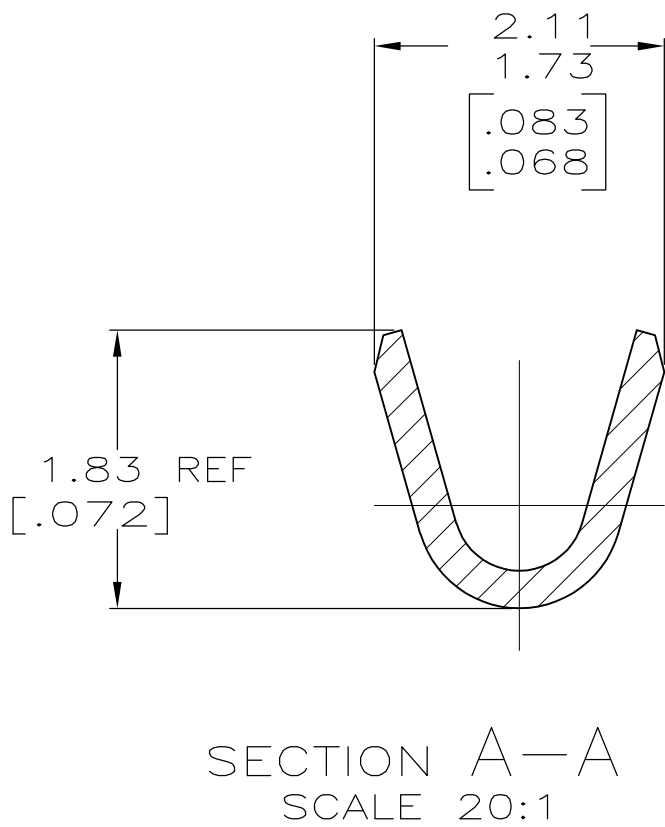

- 1 0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA OVER 0.0013 [.000050] MIN NICKEL.
2. WIRE RANGE: 0.12 – 0.4MM² (26–22 AWG).
3. INSULATION RANGE: 1.19–1.75[.047–.069] DIA.
4. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 5 0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN MATTE TIN IN LOCALIZED TIN PLATE AREA OVER 0.0013 [.000050] MIN NICKEL.
- 6 ROHS COMPLIANT.

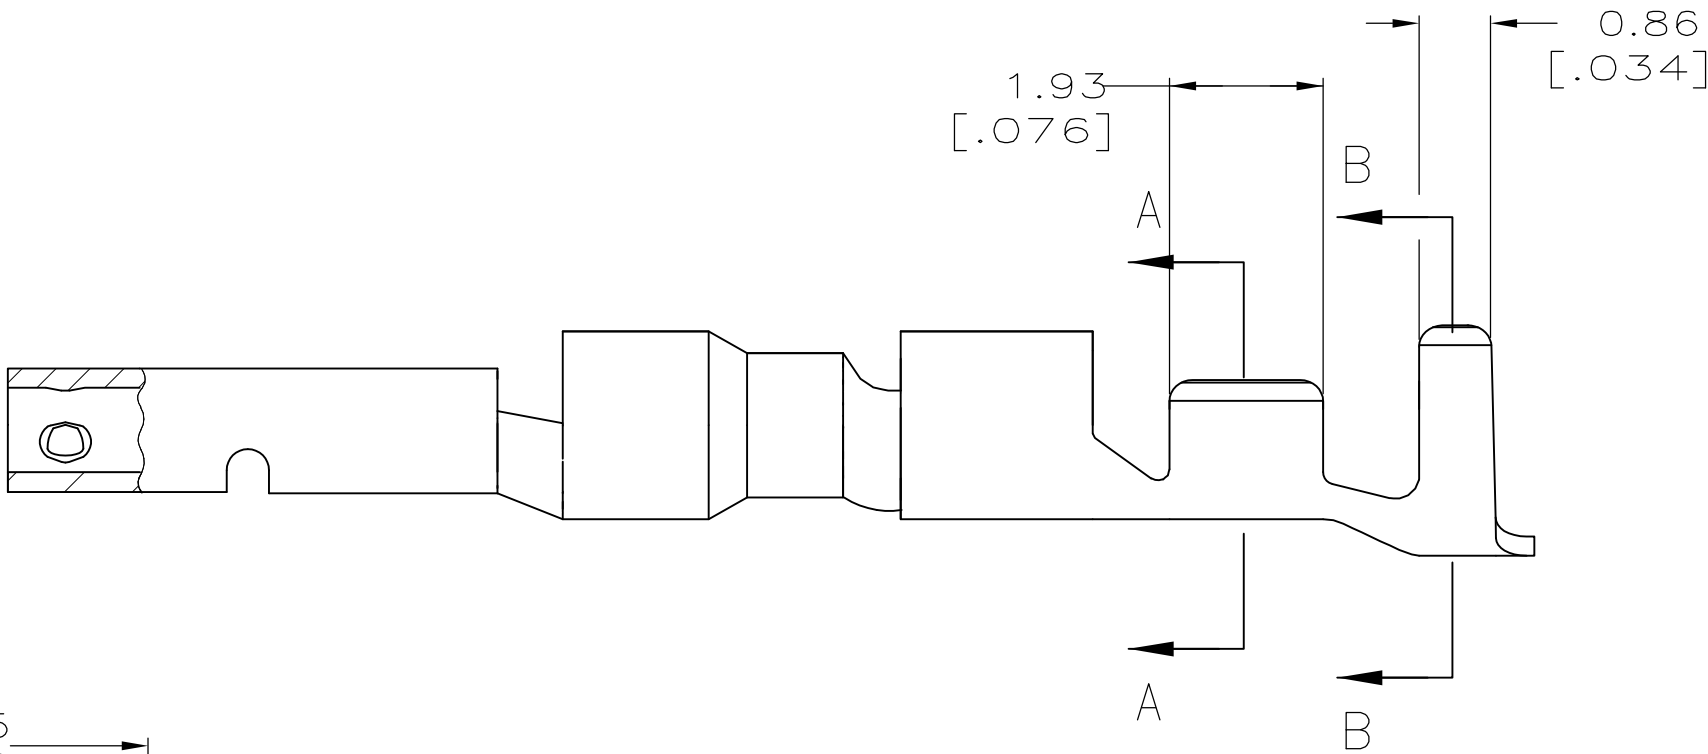

6	5	0.25[.010] BRASS	1-794227-0
	1	0.25[.010] BRASS	794227-3
	PRE-TIN	0.25[.010] BRASS	794227-1
	FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 04MAR2005	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK C. JONES 04MAR2005				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.30 [.012] 4 PLC ± - ANGLES ± -		SOCKET, LOOSE PIECE, MINI UNIVERSAL MATE-N-LOK(TM) 2			
MATERIAL SEE TABLE		APVD C. JONES 04MAR2005	PRODUCT SPEC		SIZE A2	
FINISH SEE TABLE		APPLICATION SPEC	WEIGHT -		CAGE CODE 00779	
		CUSTOMER DRAWING	DRAWING NO C=794227		RESTRICTED TO -	
		SCALE 10:1	SHEET 1 OF 1		REV E1	