


| REV | DESCRIPTION                      | DATE     |
|-----|----------------------------------|----------|
| A   | RELEASE                          | 1/7/09   |
| B   | OBSOLETE SUPERSEDED BY 99-7825CX | 06/14/13 |

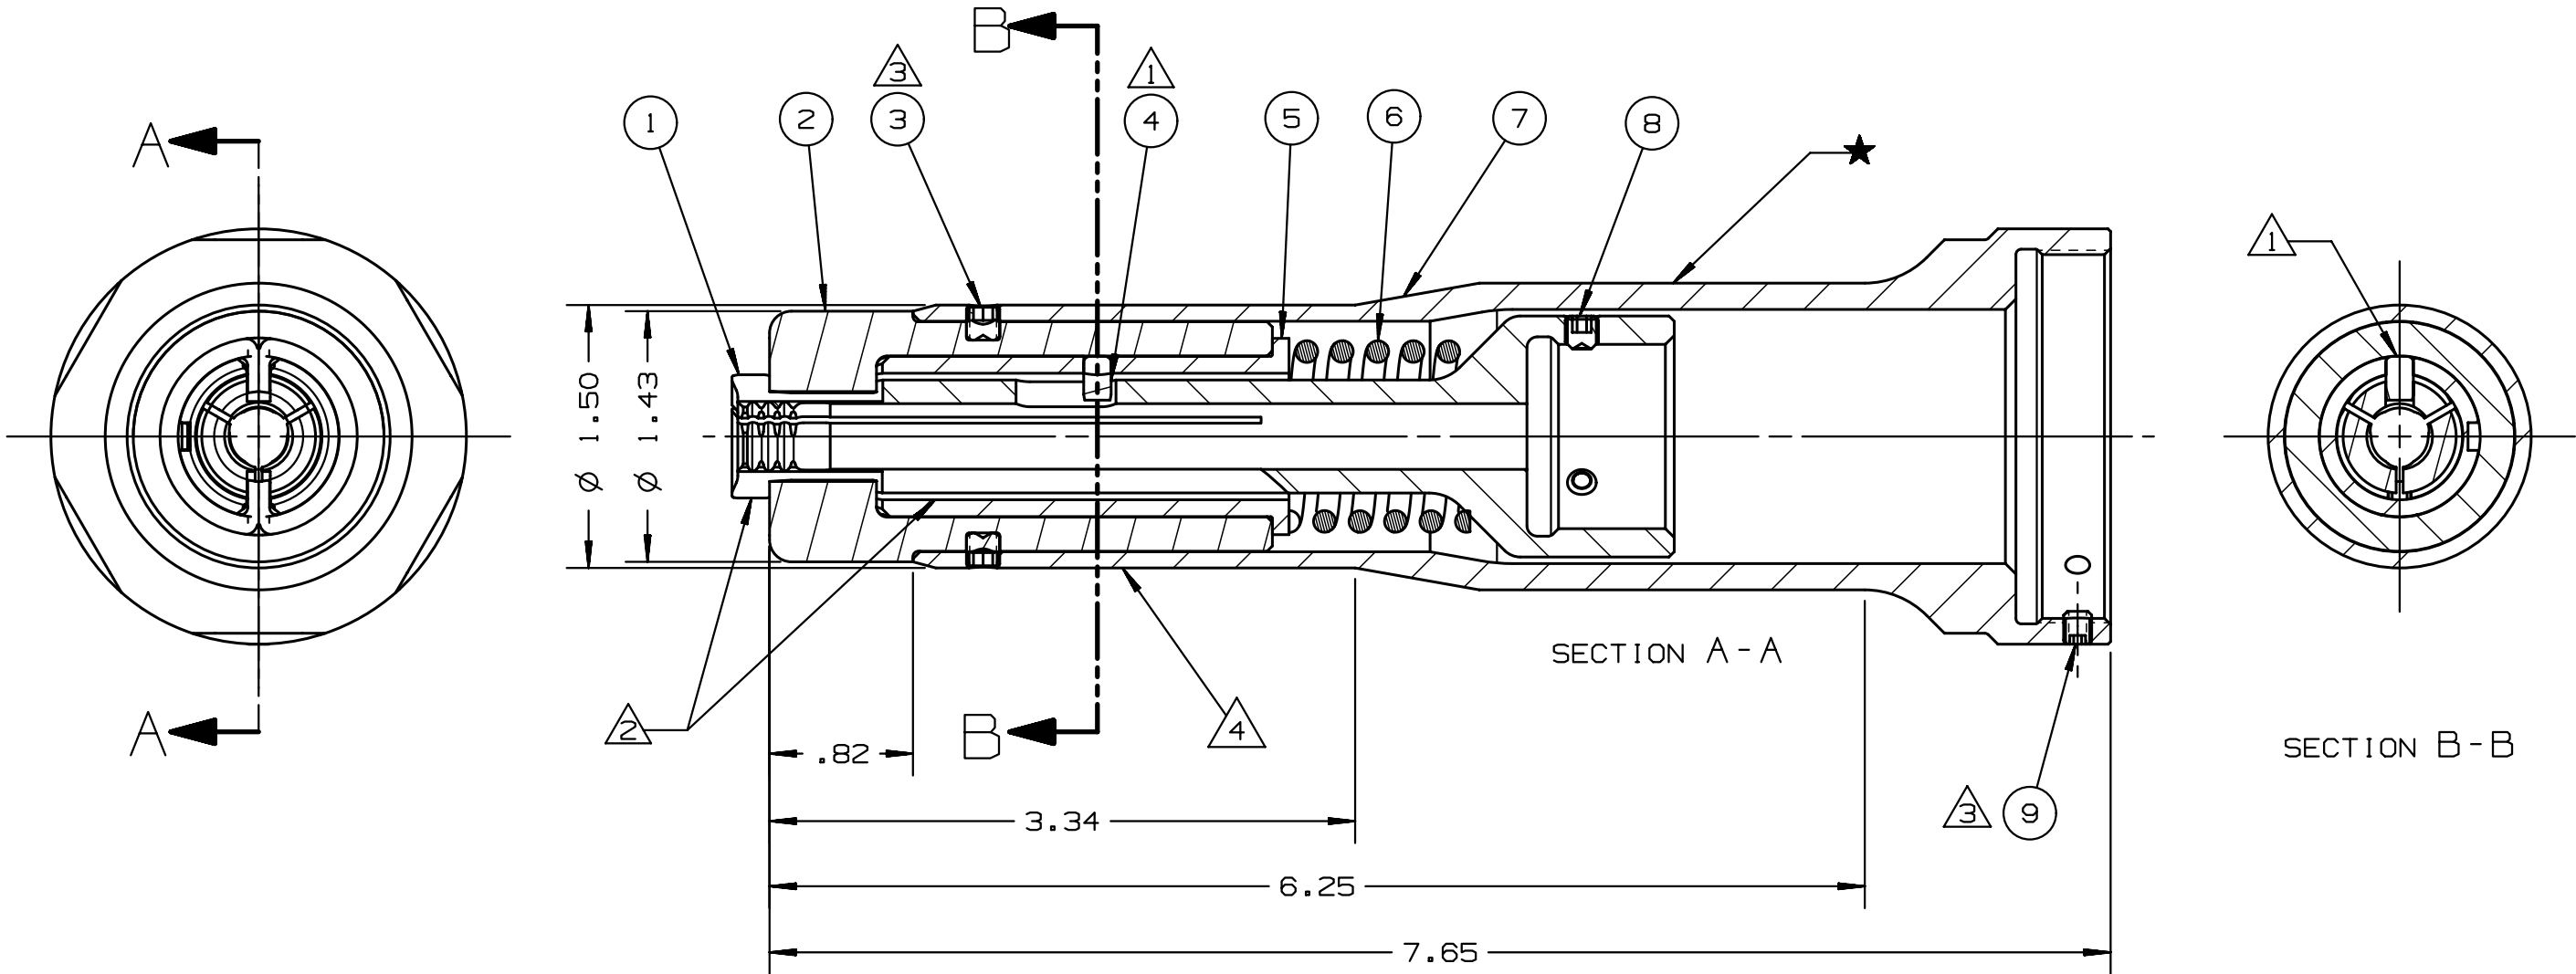

| 50 1736  | 1   | C.P.S.S. #8-32 X 3/16       | 9    |
|----------|-----|-----------------------------|------|
| 50 1920  | 3   | C.P.S.S. #10-32 X 3/16      | 8    |
| 1290 87  | 1   | ANVIL HOLDER, COLLAR CUTTER | 7    |
| 50 8376  | 1   | SPRING                      | 6    |
| 1290 86  | 1   | SLEEVE                      | 5    |
| 50 8032  | 1   | DOWEL PIN, 5/32 X 1/4       | 4    |
| 50 2017  | 4   | F.P.S.S. #10-32 X 3/16      | 3    |
| 1290 84  | 1   | ANVIL ASSY, COLLAR CUTTER   | 2    |
| 1290 83  | 1   | PULLER, COLAR CUTTER        | 1    |
| PART NO. | QTY | DESCRIPTION                 | ITEM |

|                                             |  |                                                                                |                             |
|---------------------------------------------|--|--------------------------------------------------------------------------------|-----------------------------|
| IDENTIFICATION PER SPEC 42-311: ★ PERMANENT |  |                                                                                |                             |
| ITAR:                                       |  | HUCK INTERNATIONAL, INC., I.S.D.<br>1 CORPORATE DR<br>KINGSTON, NEW YORK 12401 |                             |
| ECCN: EAR99                                 |  | ASSY, BTT-16 COLLAR CUTTER<br>BTT35LS TOOL                                     |                             |
| SCH B#: 8467.99.0190                        |  | DET: TRK                                                                       | CK: DATE: 1/7/09 SCALE: 1:1 |
| HTS: 8467.99.0190                           |  | B                                                                              | 99-7825CC                   |

NOTES:

- ① PRESS DOWEL PIN 508032 FLUSH TO .010 BELOW O.D. SURFACE OF SLEEVE 129086.
- ② APPLY ANTI-SEIZE LUBRICANT P/N: 505565 TO OUTSIDE OF PULLER AND INSIDE OF SLEEVE.
- ③ APPLY VIBRA-TITE P/N: 505125 TO SET SCREW THREADS PER MFR'S INSTRUCTIONS.
- ④ APPLY WARNING STICKER P/N: 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.