
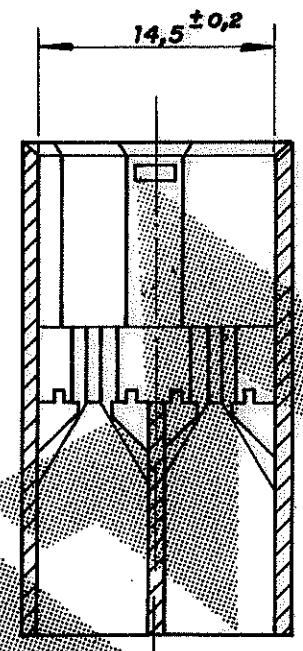
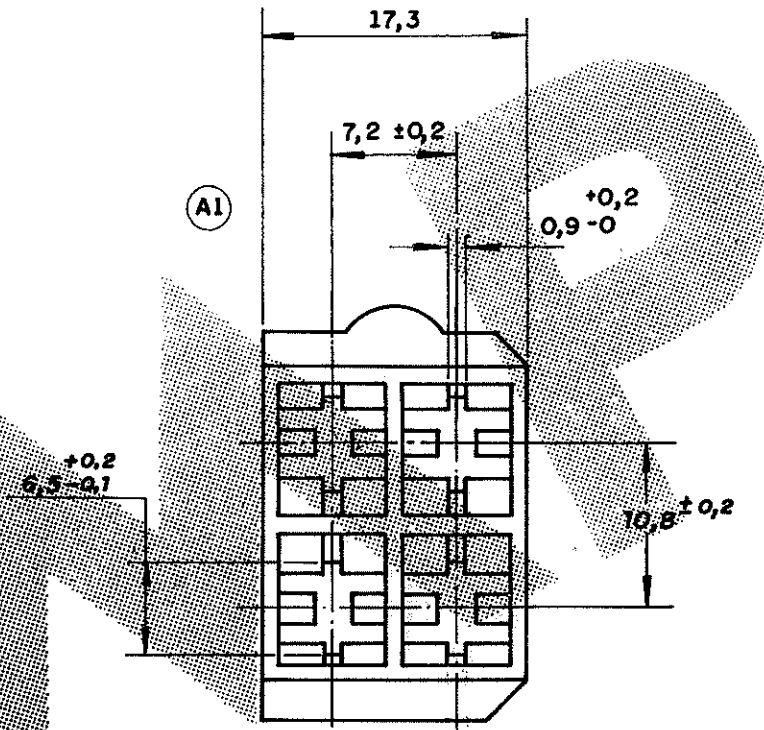
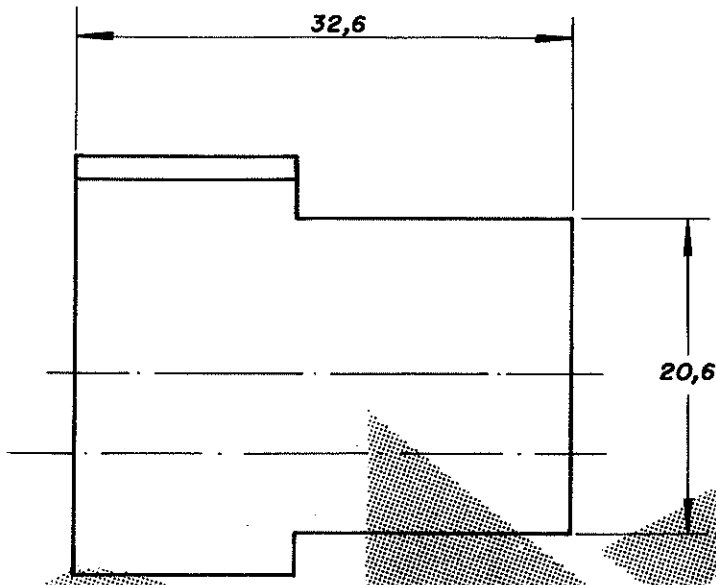


C

B

A

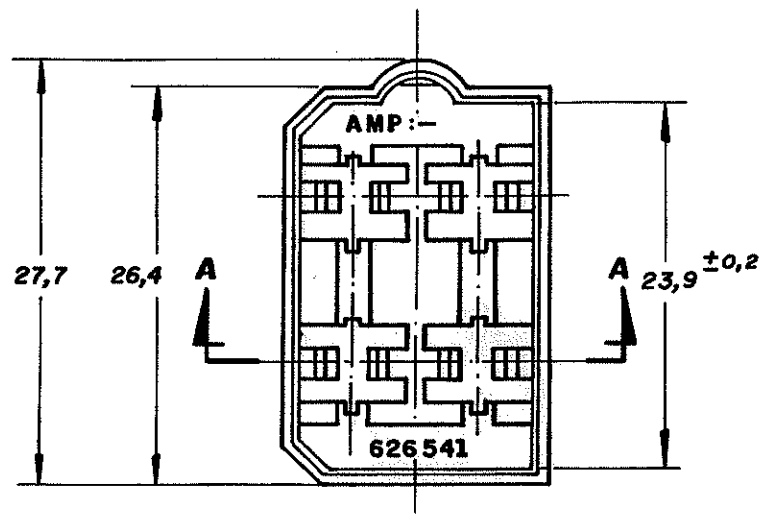

SECÇÃO A:A

- 1 - MATÉRIA PRIMA CONFORME ESPECIFICAÇÃO IEC 60335
GWT 750°C SEM CHAMA
RAW MATERIAL ACC. TO SPEC. IEC 60335
GWT 750°C WITHOUT FLAME.
- 2 OBSOLETE PARTS OBSOLETE
CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE

NATURAL	PA 6.6 V-0	2	-0
LARANJA		2	-7
MARROM		2	-8
CINZA		2	-9
PRETO		2	-4
AMARELO		2	-3
AZUL		2	-2
VERDE		2	-1
VERMELHO	PA 6.6	2	-626 541 - 0
LARANJA			-9
MARROM			-8
CINZA			-7
PRETO			-6
AMARELO			-5
AZUL			-4
VERDE			-3
VERMELHO TINGIDO			-2
NATURAL	POLIAMIDA 6.6		626 541 - 1

OTHER TREATMENT		FINISH		MATERIAL		PART NUMBER	
CUSTOMER DWG for REFERENCE ONLY				THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION © COPYRIGHT 1988 BY AMP DO BRASIL LTDA S.P. ALL INTERNATIONAL RIGHTS RESERVED AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.			
TOLERANCES UNLESS OTHERWISE STATED DEC. ± 0,4 ANGLES ± 1°				INS. DIA. RANGE		WIRE RANGE	
				///		///	
DR. Paulo S.B. Agosto 16-88				SCALE ///			
B1 ECO-09-026444 KK AEG NOV09				AMP do BRASIL LTDA. São Paulo , Brasil			
B REVISED LE10.0051/05 H.C. H.C. 05 Apr. 05				DESCRIPTION 4 WAY FASTIN-ON TAB HOUSING			
A1 REVISADO Briz 6-2-92				DWG NO			
A REDESENHADO P.S.B. 16-88				A3 C 626 541			
ISS REVISION RECORD DR CHK DATE APP.				SHEET 1 of 1			