


GSD

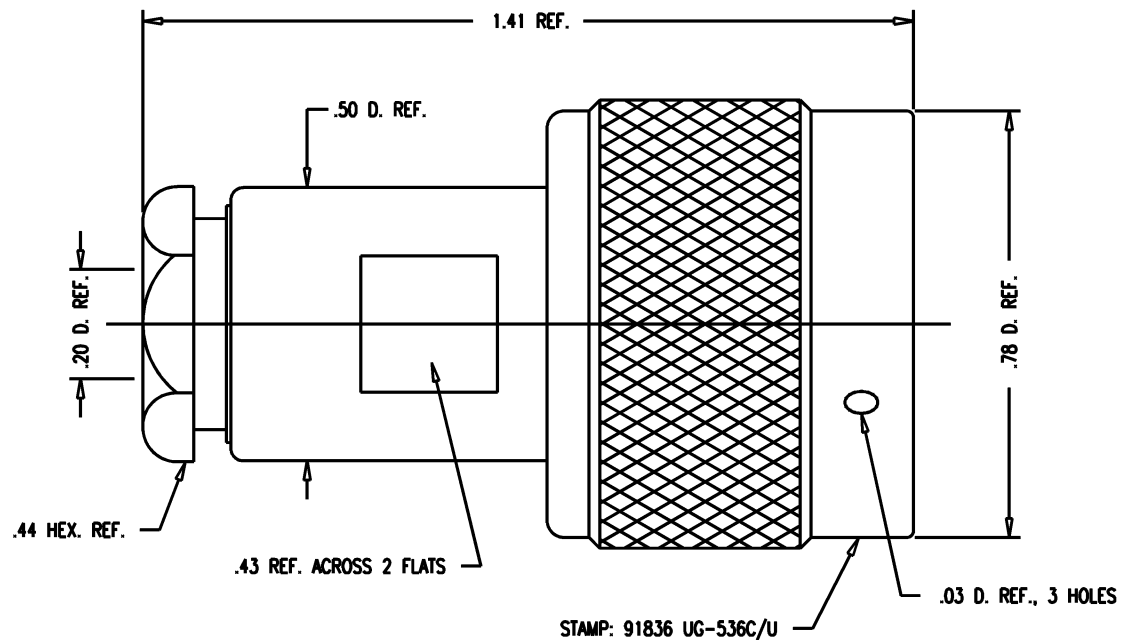

NOTES:

1. FOR USE WITH RG-55/U & RG-58/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-1014.
3. INTERFACE PER MIL-STD-348, FIG. 304-1.
4. MATERIALS:
INSULATOR: TEFLON, ASTM-D-1457
GASKETS: SILICONE RUBBER, ZZ-R-765
C-RING & OUTER CONTACT: PHOSPHOR BRONZE, QQ-B-750
ALL OTHER METAL PARTS: BRASS, ASTM-B16
5. FINISHES:
CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
ALL OTHER METAL PARTS: SILVER PLATE, PER QQ-S-365
6. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 1000 VRMS
FREQUENCY RANGE: DC TO 11 GHz.

REVISIONS

ISSUE	CHANGES
5	CN 32748 C WJM 01/15/91

UG-536C/U

WJM1684

SCALE 4:1

APPROX SURFACE AREA

KN-58-07

USED ON

REF: RE-B-49090 B

PLUG, N

DRAWN WJM DATE 01/15/92

DESIGN MJB DATE 01/17/92

APPR. DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

UG-536C/U

GSD