


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

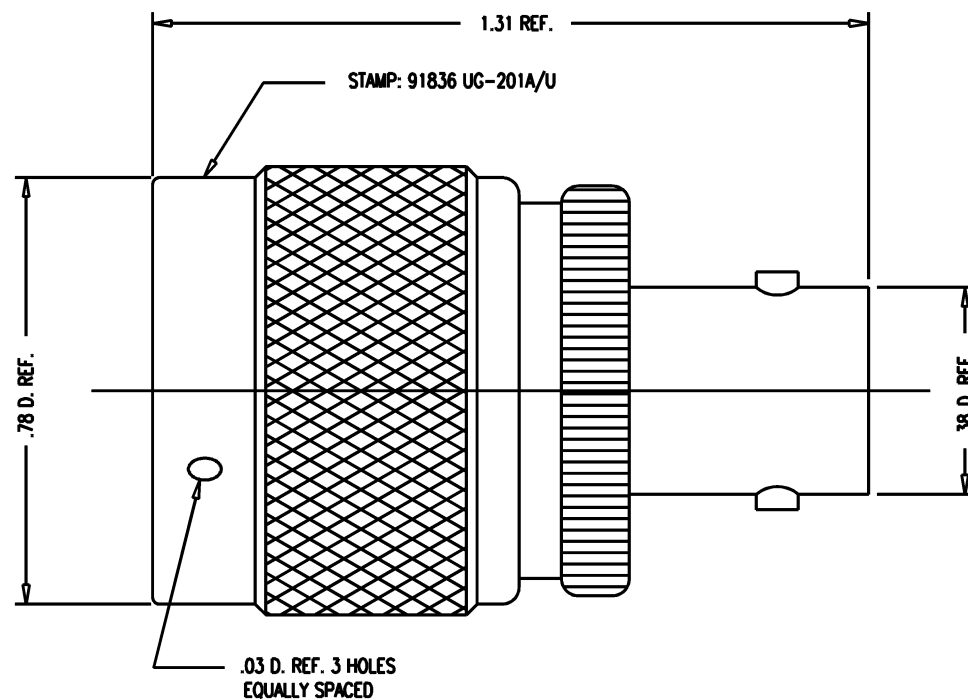

NOTES:

1. INTERFACE PER MIL-STD-348, FIG. 304-1 (N) AND 301-2 (BNC).
2. MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
GASKET: SILICONE RUBBER, ZZ-R-765
C-RING } PHOSPHOR BRONZE, ASTM-B-103
OUTER CONTACT }
CENTER CONTACT: BER. COPPER, ASTM-B-196
ALL OTHER METAL PARTS: BRASS, ASTM-B16
3. FINISHES:
ALL METAL PARTS: SILVER PLATE PER QQ-S-365
4. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 Ω
FREQUENCY RANGE: DC TO 11 GHz
WORKING VOLTAGE: 500 VOLTS RMS

GSD

UG-201A/U

REVISIONS

ISSUE	CHANGES
8	CN 36539 C REDRAWN ME 09/01/95

QGS0801

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

ADAPTER N(M) TO BNC(F)

DRAWN	ME	09/01/95
DESIGN	AR	09/01/95
APPR.		DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

UG-201A/U

GSD