


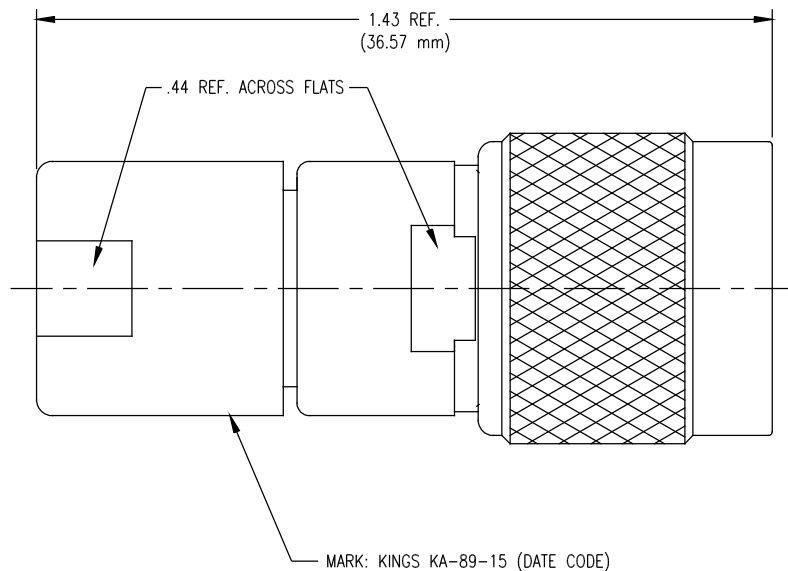

NOTES:

1. INTERFACE PER MIL-STD-348, FIG. 301-1.
2. MATERIALS:
INSULATOR: TEFLON, ASTM D1710
GASKET: SILICONE RUBBER, A-A-59588
SPRING WASHER: BER. COPPER, ASTM B196
ALL OTHER METAL PARTS: BRASS, ASTM B16
3. FINISHES:
CENTER CONTACT
SPRING WASHER
SLEEVE
BUSHING

.000200 MIN SILVER PLATE PER ASTM B700 OVER
.000020 MIN NICKEL PER AMS-QQ-N-290 (RoHS)

ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N-290 OVER
.000050 MIN COPPER PER ASTM B734 (RoHS)
4. ELECTRICAL CHARACTERISTICS:
50 OHMS, 0.5 WATT $\pm 1\%$, NON-INDUCTIVE
5. SWR LESS THAN 1.08 OR RETURN LOSS -27.96 dB @ 100 MHz.
6. WEIGHT: 22.6 GRAMS

KA-89-15

REVISIONS

ISSUE	CHANGES
7	CN 38173 E REDRAWN DCT 1/8/01
8	CN 38366 E TML 08/07/01
K	REVISED PER DMF304 & ER041875 KPL 5/15/12

CUSTOMER SALES DRAWING

THIS DRAWING, THE DESIGNS AND IDEAS EMBODIED IN THE DEVICE TO WHICH IT RELATES, AND THE METHOD OF PRODUCING THE DEVICE, ARE THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION AND SHALL NOT BE EMPLOYED, COPIED, OR DISCLOSED TO ANYONE, IN ANY MANNER WITHOUT THE CONSENT OF WINCHESTER ELECTRONICS CORPORATION.

SCALE 4:1

APPROX SURFACE AREA

CAGE CODE: 91836

REF:

TERMINATION, TNC
50 OHM, 1%, 1/2 W

DRAWN A.T.	DATE 11/22/67
DESIGN	DATE
APPR. MS	DATE 6/25/69



KA-89-15