

PENETROX LINED


PLASTIC
SEALED

H

W

L
LLPOLYETHYLENE PACKAGE
SHOWING CONDUCTOR
RANGE INFORMATION &
INSTALLATION DATA

8

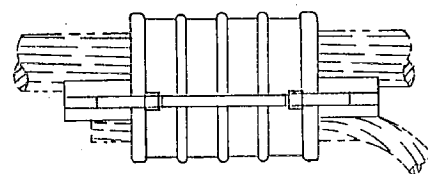

INSTALLED VIEW

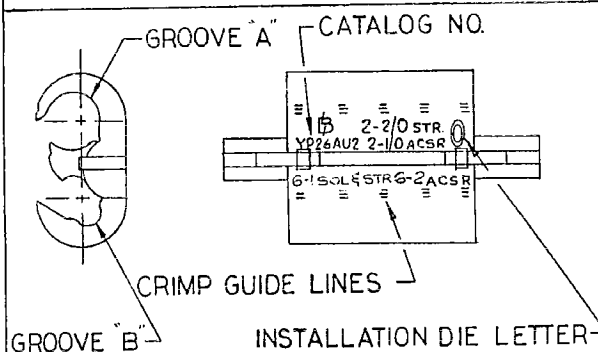
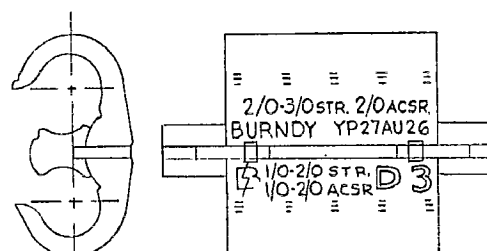

TYPICAL LETTERING
FIG. 1TYPICAL LETTERING
FIG. 2

FIG. 3

INSTALLATION DATA																	FIG. 1		FIG. 2									
CATALOG NUMBER	FIG. NO.	ACCOMMODATES										H	L	LL	W	INSTALLATION DATA				CATALOG NUMBER								
		GROOVE A					GROOVE B									DIE INDEX	HYTOOL WITH NO. OF CRIMPS	HYPRESS WITH NO. OF CRIMPS										
		SOLID CU OR AL	STRANDED CU OR AL	STRANDED COMPRESSED	ACSR	ACSR COMPRESSED	SOLID CU OR AL	STRANDED CU OR AL	STRANDED COMPRESSED	ACSR	ACSR COMPRESSED						MD6	Y35										
																	DIE INSERT	DIE SET										
YP2U3	2	6,4,3,2	6,4,3	6,4,3,2	6,4	6,4,3	6,4,3,2	6,4,3	6,4,3,2	6,4	6,4,3	1.30	1.50	2.50	.72	0	W-0	U-0	YP2U3									
YP26AU2	1	1,1/0,2/0,3/0	2,1,1/0,2/0	2,1,1/0,2/0	3,2,1,1/0	2,1,1/0,2/0	6,4,3,2,1,1/0	6,4,3,2,1	6,4,3,2,1	6,4,3,2	6,4,3,2,1	1.70	1.69	2.69	.97	03	NONE REQUIRED	4	U-D3	YP26AU2								
YP25U25	3	2/0,3/0	1,1/0,2/0	1/0,2/0	1,1/0	1/0,2/0	2/0,3/0	1,1/0,2/0	1/0,2/0	1,1/0	1/0,2/0									YP25U25								
YP27AU4	2	2/0,3/0,4/0	1/0,2/0,3/0	2/0,3/0	1/0,2/0	1/0,2/0,3/0	6,4,3,2	6,4,3	6,4,3	6,4	6,4,3									YP27AU4								
YP27AU2	2	2/0,3/0,4/0	1/0,2/0,3/0	2/0,3/0	1/0,2/0	1/0,2/0,3/0	2,1,1/0	4,3,2,1	3,2,1	4,3,2	4,3,2,1									YP27AU2								
YP27AU26	2	3/0,4/0	2/0,3/0	3/0	2/0	2/0,3/0	2/0,3/0	1/0,2/0	1/0,2/0,3/0	1,1/0,2/0	1/0,2/0									YP27AU26								
YPC28U4	3	3/0,4/0	3/0,4/0	4/0,250,266.8	3/0,4/0	4/0,266.8(18-1)	6,4,3,2	6,4,3	6,4,3	6,4	6,4,3									1.98	2.75	.90	.95	0	W-0	4	U-0	YPC28U4
YP28U2	2	4/0	4/0			2,1,1/0	4,3,2,1	3,2,1	4,3,2	4,3,2,1	4,3,2,1																	YP28U2
YP28U26	2	4/0	4/0			2/0,3/0	1/0,2/0	1/0,2/0,3/0	1,1/0,2/0	1/0,2/0	1/0,2/0																	YP28U26
YPC28U28	3	4/0	3/0,4/0			3/0,4/0,266.8(18-1)	4/0	2/0,3/0,4/0	3/0,4/0,250,266.8	2/0,3/0,4/0	3/0,4/0,266.8(18-1)																	YP28U28
YP28R28A	3	4/0	3/0,4/0	4/0,266.8(18-1)	4/0	3/0,4/0	4/0	3/0	4/0	YP28R28A																		
YP26AU4	1	1,1/0,2/0,3/0	2,1,1/0,2/0	2,1,1/0,2/0	3,2,1,1/0	2,1,1/0,2/0	6,4,3,2,1,1/0	6,4,3,2,1	6,4,3,2,1	6,4,3,2	6,4,3,2,1	1.30	1.50	2.50	.72	0	W-0	4	U-0	YP26AU4								
YP26AU2G3	1	1/0	2,1/0	2/0	2,1/0	2,1/0	1/0	2	2	2	2	1.30	1.50	2.50	.72	0	W-0	4	U-0	YP26AU2G3								

NOTES:

1. FOR CONDUCTOR COMBINATIONS OF ALUM. TO ALUM. OR ALUM. TO COPPER.
2. TAKES UP TO #2 ACSR MAX. IN EITHER GROOVE IF OTHER WIRE IS #2 SOL. OR SMALLER.
3. TAKES DOWN TO #2 ACSR MIN. IN EITHER GROOVE IF OTHER GROOVE WIRE IS 1/0 STR. OR LARGER.
4. IT IS RECOMMENDED THAT THE FIRST CRIMP BE MADE IN THE CENTER OF THE YP25U25, YP28U2 & YPC28U26. STAMPED LETTERING ON BODY OF CONNECTOR INDICATES THIS PROCEDURE.
5. 2/0 STR. CU. AL AND 2/0 ACSR MAY ALSO BE INSTALLED IN GROOVE 'A' OF THE YPC28U28 WHEN GROOVE 'B' CONDUCTOR IS 3/0 STR. OR LARGER.

6. PARTIALLY CUT OR SERKATED STRIPSEAL PACKAGES ARE ACCEPTABLE AS LONG AS THE PACKAGED CONNECTORS MAY BE EASILY TORN APART ONE FROM ANOTHER. NO DAMAGE SHOULD RESULT TO THE STRIPSEAL OF EITHER CONNECTOR WHEN TORN ALONG THE DESIGNATED LINES.

7. CAN ALSO ACCOMMODATE 5/16-7/16 STEEL IN GROOVE 'A' AND 1/4-5/16 STEEL IN GROOVE 'B'.

8. PREPRINTED POLY BAG MAY BE USED AS AN ALTERNATE PACKAGING METHOD.

THIS DRAWING AND/OR SPECIFICATION IS THE PROPERTY OF THE BURNDY CORPORATION. IT IS ISSUED IN STRICT CONFIDENCE, AND SHALL NOT BE REPRODUCED, OR COPIED, OR DISCLOSED TO OTHERS, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT THE PERMISSION OF THE OWNER.

INSTALLATION NOTES:

- (A) CLEAN RUN & TAP CONDUCTORS WHETHER COPPER OR ALUMINUM, WITH WIRE BRUSH OR ABRASIVE CLOTH BEFORE INSTALLING CABELOK CRIMPIT.
- (B) IF RUN CONDUCTOR IS COPPER INSTALL CONNECTOR SO THAT TAP WILL BE ABOVE RUN.
- (C) THE CABELOK HAS A BENDABLE SPACER FOR HOLDING CONDUCTORS IN PLACE PRIOR TO CRIMPING.

MATERIAL:

ALUMINUM

REFERENCE:

FD45359, FD45313, XC61334, XD61496, XD61654
FC 41067

SUPERSEDES DWG. SD45569-22

Cabelok CRIMPIT		SCALE
CAT. NO. YP-AU, YP-U, YC-U, YPC-U		
DRAWN R.H.S. 1-31-64	CHECKED MTM 2-24-64	
BURNDY Corporation NORWALK, CONNECT.		
DES. APPROV. 2-24-64	PROD. APPROV.	
DRAWING NO.	REV.	
SD45569	29	