

TECHNICAL DATA SHEET

Multi-Layer Broadband Absorber

Part Number: ML-10051-35 (ML-75 Series)

Description: Multi-layered broadband absorber consisting of graduated layers of loaded open-cell urethane foam, covered with a weather-resistant nylon/hypalon fabric. Weather-wrap color "Ocean Gray".

Thickness: 1.125" (28.575mm) exclusive of weather-wrap

Standard Sheet Size: 24" x 24" (60.96 x 60.96cm)

Foam Density: 2 lbs/cu ft (32 kg/m³)


Color: Black

Temp. Range: -70°F to + 270°F (-56.7°C to +132.2°C)

Features:

- PSA (optional): A high performance unsupported acrylic transfer film adhesive is used with a thickness of .002".
- Surface Coating (optional): Tough acrylic sealant
- Ground Film (optional): Conductive Mylar when specified

Typical Reflection Loss (2-18GHz) at 7.5° incident (normal) angle:

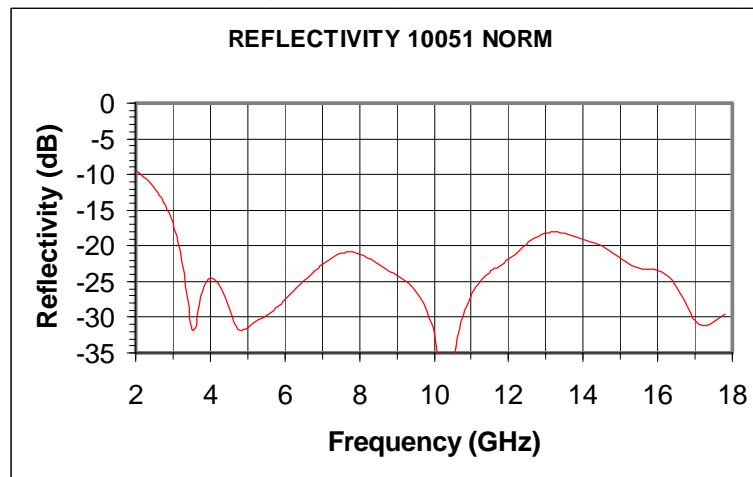


Solutions for Interference Control

ARC Technologies, Inc.
11 Chestnut Street, Amesbury, MA 01913
978-388-2993 Fax: 978-388-6866
www.arc-tech.com

ARC Technologies, Inc. 11 Chestnut Street, Amesbury, MA 01913
+1-978-388-2993 • Fax: +1-978-388-6866 • www.arc-tech.com

Typical Reflection Loss (2-18GHz) at 60° incident angle:

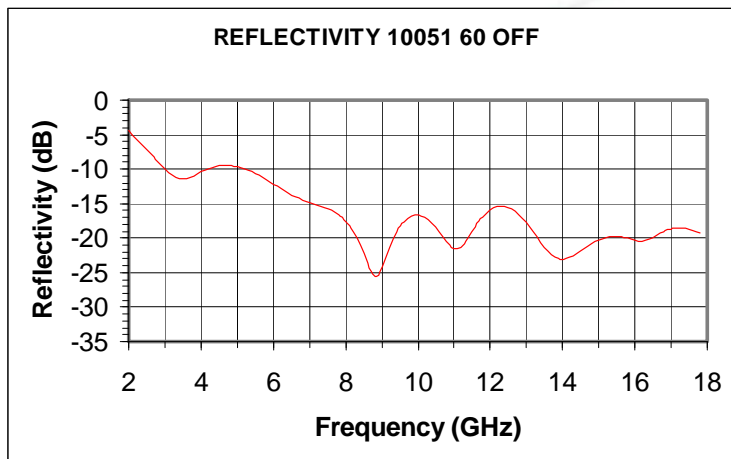

The technical information contained herein is consistent with the properties of this material but should not be used in the preparation of specifications as it is intended for reference only.



Solutions for Interference Control

ARC Technologies, Inc.
 11 Chestnut Street, Amesbury, MA 01913
 978-388-2993 Fax: 978-388-6866
www.arc-tech.com