



www.dilabs.com

6GHz Surface Mount Bandpass Filter

B060NC5S



DLI • Novacap • Syfer • Voltronics

www.knowlesc capacitors.com

DESCRIPTION

DLI's 6GHz bandpass filter offers unmatched size and performance in a surface mount configuration. This filter utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature.

FEATURES


- Small Size
- Frequency Stable over Temperature
- Solder Surface Mount Package
- Excellent Repeatability
- Operating Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

SPECIFICATIONS*

Parameter	Frequency Range	Min	Typ.	Max
Insertion Loss (dB)	5.5 - 6.5		2	3
Return Loss (dB)		14	18	
Low Side Rejection (dB)	DC - 4.9	30	40	
High Side Rejection (dB)	7.1 - 14	30	40	
Input Power (W)				TBD

*Electrical specifications based on typical mounted performance at room temperature. Insertion loss shall vary ± 0.5 dB over temperature.

Typical Measured Performance

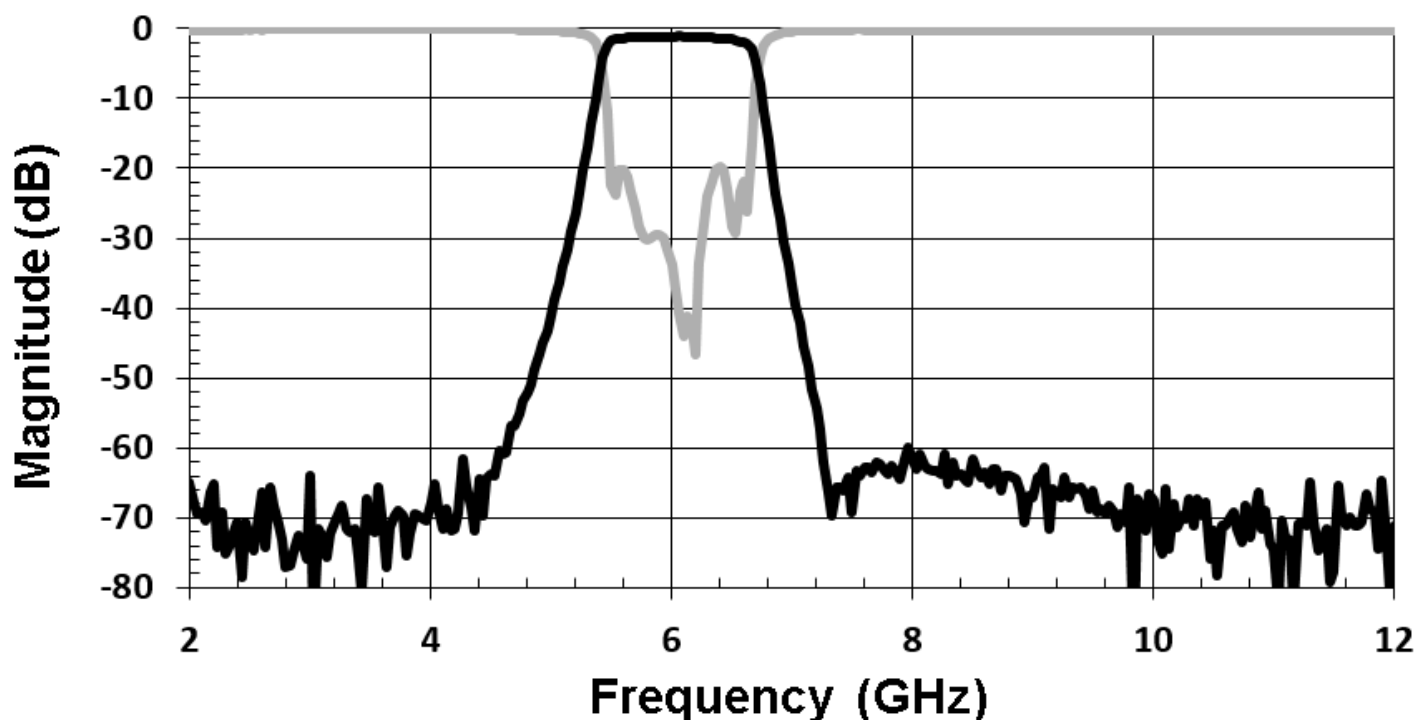

2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710 | KCCSales@knowles.com

December 2015



www.dilabs.com



6GHz Surface Mount Bandpass Filter

B060NC5S




DLI • Novacap • Syfer • Voltronics

www.knowlescapacitors.com

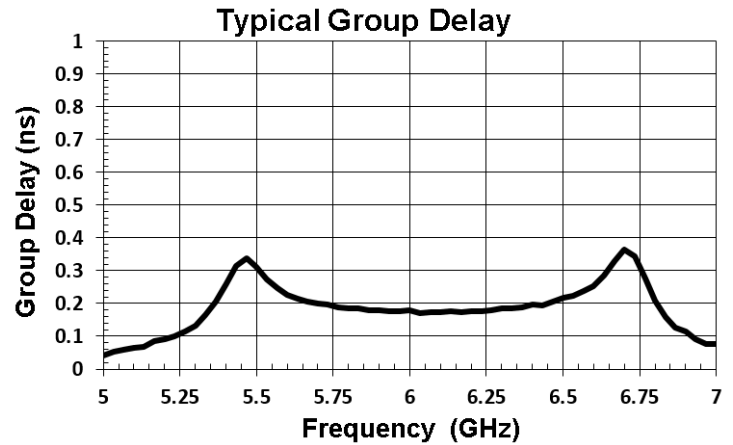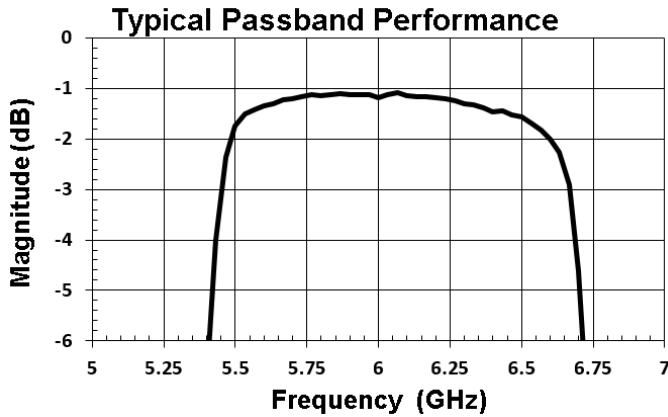


Physical Dimensions

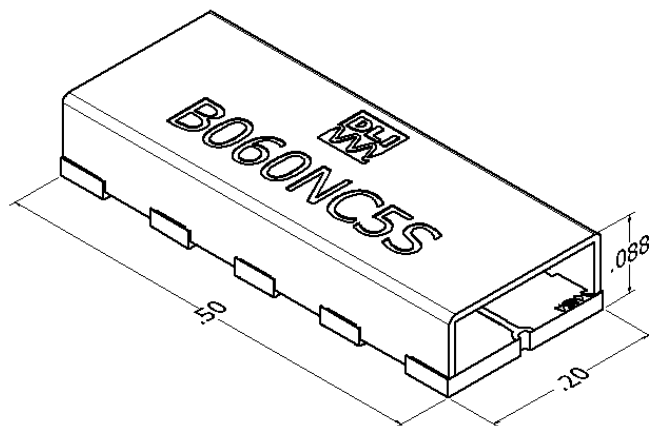


Isometric View

Units = inches

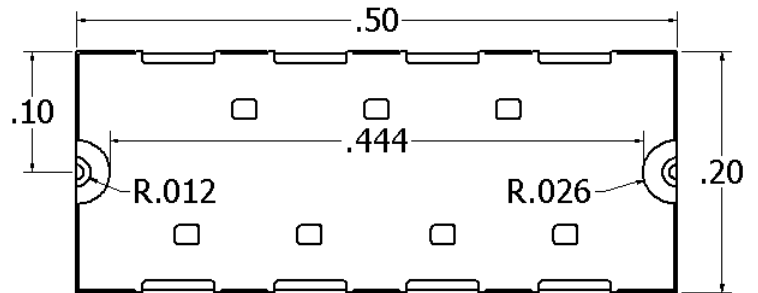

Bottom View

Recommended PCB Layout

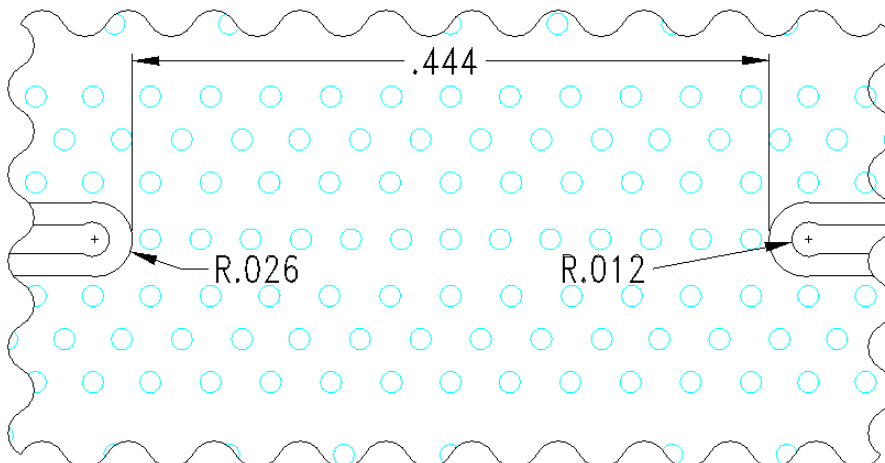

- 50Ω trace dimensions are application specific.
- Ensure adequate grounding beneath the part.



2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710 | KCCSales@knowles.com

December 2015