



Converter - Brake - Inverter Module (CBI 1) NPT IGBT

Three Phase Rectifier	Brake Chopper	Three Phase Inverter
$V_{RRM} = 1600 \text{ V}$	$V_{CES} = 600 \text{ V}$	$V_{CES} = 600 \text{ V}$
$I_{DAVM25} = 90 \text{ A}$	$I_{C25} = 12 \text{ A}$	$I_{C25} = 52 \text{ A}$
$I_{FSM} = 300 \text{ A}$	$V_{CE(sat)} = 2.5 \text{ V}$	$V_{CE(sat)} = 2.5 \text{ V}$

Preliminary data

Part name (Marking on product)

MUBW10-06A6K

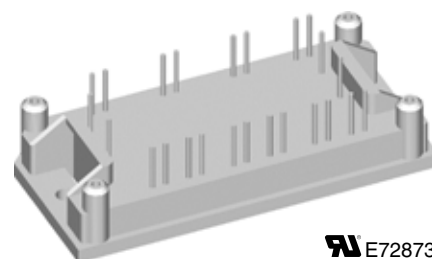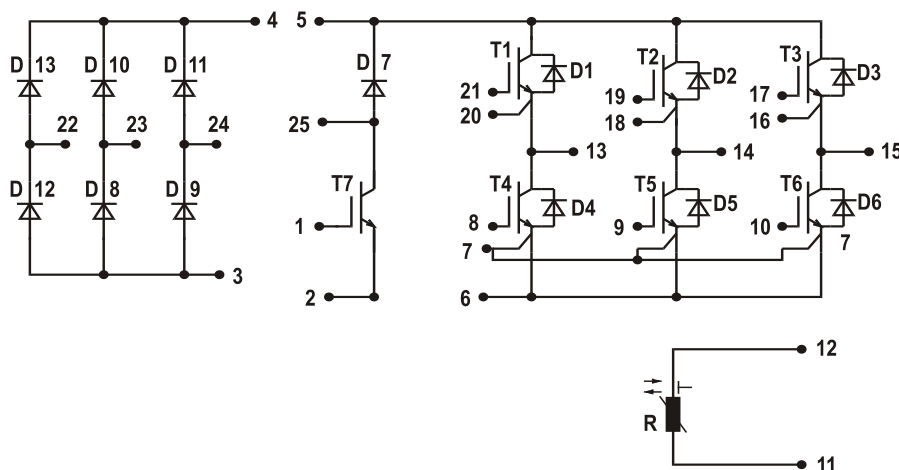

E72873

Pin configuration see outlines.

Features:

- High level of integration - only one power semiconductor module required for the whole drive
- Inverter with NPT IGBTs
- low saturation voltage
- positive temperature coefficient
- fast switching
- short tail current
- Epitaxial free wheeling diodes with hiperfast and soft reverse recovery
- Industry standard package with insulated copper base plate and soldering pins for PCB mounting
- Temperature sense included

Application:

- AC motor drives with
- Input from single or three phase grid
 - Three phase synchronous or asynchronous motor
 - Electric braking operation

Package:

- UL registered
- Industry standard E1-pack

Output Inverter T1 - T6

Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
V_{CES}	collector emitter voltage	$T_{VJ} = 25^{\circ}\text{C}$ to 150°C			600		V
V_{GES}	max. DC gate voltage	continuous			± 20		V
V_{GEM}	max. transient collector gate voltage	transient			± 30		V
I_{C25}	collector current	$T_C = 25^{\circ}\text{C}$			11		A
I_{C80}		$T_C = 80^{\circ}\text{C}$			8		A
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$			50		W
$V_{CE(sat)}$	collector emitter saturation voltage	$I_C = 10\text{ A}; V_{GE} = 15\text{ V}$		2.7 3.1	3.3		V
$V_{GE(th)}$	gate emitter threshold voltage	$I_C = 0.2\text{ mA}; V_{GE} = V_{CE}$	4.5		6.5		V
I_{CES}	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0\text{ V}$		1.0	65		μA mA
I_{GES}	gate emitter leakage current	$V_{CE} = 0\text{ V}; V_{GE} = \pm 20\text{ V}$			120		nA
C_{ies}	input capacitance	$V_{CE} = 25\text{ V}; V_{GE} = 0\text{ V}; f = 1\text{ MHz}$		220			pF
$Q_{G(on)}$	total gate charge	$V_{CE} = 300\text{ V}; V_{GE} = 15\text{ V}; I_C = 6\text{ A}$		32			nC
$t_{d(on)}$	turn-on delay time	inductive load $V_{CE} = 300\text{ V}; I_C = 6\text{ A}$ $V_{GE} = \pm 15\text{ V}; R_G = 54\ \Omega$	$T_{VJ} = 125^{\circ}\text{C}$	20			ns
t_r	current rise time			10			ns
$t_{d(off)}$	turn-off delay time			110			ns
t_f	current fall time			30			ns
E_{on}	turn-on energy per pulse			0.22			mJ
E_{off}	turn-off energy per pulse			0.26			mJ
I_{CM}	reverse bias safe operating area	RBSOA; $V_{GE} = \pm 15\text{ V}; R_G = 54\ \Omega$ $L = 100\ \mu\text{H}$; clamped induct. load $V_{CEmax} = V_{CES} - L_S \cdot di/dt$	$T_{VJ} = 125^{\circ}\text{C}$	18			A
t_{SC} (SCSOA)	short circuit safe operating area	$V_{CE} = 600\text{ V}; V_{GE} = \pm 15\text{ V}; R_G = 54\ \Omega$; non-repetitive	$T_{VJ} = 125^{\circ}\text{C}$	10			μs
R_{thJC}	thermal resistance junction to case	(per IGBT)			2.75		K/W
R_{thCH}	thermal resistance case to heatsink	(per IGBT)		0.95			K/W

Output Inverter D1 - D6

Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 150^{\circ}\text{C}$			600		V
I_{F25}	forward current	$T_C = 25^{\circ}\text{C}$			21		A
I_{F80}		$T_C = 80^{\circ}\text{C}$			14		A
V_F	forward voltage	$I_F = 10\text{ A}; V_{GE} = 0\text{ V}$			2.2 1.6		V
I_{RM}	max. reverse recovery current	$V_R = 100\text{ V}$ $di_F/dt = -100\text{ A}/\mu\text{s}$ $I_F = 12\text{ A}; V_{GE} = 0\text{ V}$	$T_{VJ} = 100^{\circ}\text{C}$		4.4		A
t_{rr}	reverse recovery time			80			ns
$E_{rec(off)}$	reverse recovery energy			tdb			μJ
R_{thJC}	thermal resistance junction to case	(per diode)			2.5		K/W
R_{thCH}	thermal resistance case to heatsink	(per diode)		0.85			K/W

 $T_C = 25^{\circ}\text{C}$ unless otherwise stated

Brake Chopper T7

Symbol	Definitions	Conditions	Ratings			
			min.	typ.	max.	Unit
V_{CES}	collector emitter voltage	$T_{VJ} = 25^{\circ}\text{C}$ to 150°C			600	V
V_{GES}	max. DC gate voltage	continuous			± 20	V
V_{GEM}	max. transient collector gate voltage	transient			± 30	V
I_{C25}	collector current	$T_C = 25^{\circ}\text{C}$			11	A
I_{C80}		$T_C = 80^{\circ}\text{C}$			8	A
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$			50	W
$V_{CE(sat)}$	collector emitter saturation voltage	$I_C = 10\text{ A}; V_{GE} = 15\text{ V}$		2.65 3.1	3.3	V V
$V_{GE(th)}$	gate emitter threshold voltage	$I_C = 0.2\text{ mA}; V_{GE} = V_{CE}$	4.5		6.5	V
I_{CES}	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0\text{ V}$		0.7	0.1	mA mA
I_{GES}	gate emitter leakage current	$V_{CE} = 0\text{ V}; V_{GE} = \pm 20\text{ V}$			120	nA
C_{ies}	input capacitance	$V_{CE} = 25\text{ V}; V_{GE} = 0\text{ V}; f = 1\text{ MHz}$		220		pF
$Q_{G(on)}$	total gate charge	$V_{CE} = 300\text{ V}; V_{GE} = 15\text{ V}; I_C = 6\text{ A}$		32		nC
$t_{d(on)}$	turn-on delay time	inductive load $V_{CE} = 300\text{ V}; I_C = 6\text{ A}$ $V_{GE} = \pm 15\text{ V}; R_G = 54\text{ }\Omega$	$T_{VJ} = 125^{\circ}\text{C}$	20		ns
t_r	current rise time			10		ns
$t_{d(off)}$	turn-off delay time			110		ns
t_f	current fall time			30		ns
E_{on}	turn-on energy per pulse			0.21		mJ
E_{off}	turn-off energy per pulse			0.26		mJ
I_{CM}	reverse bias safe operating area	RBSOA; $V_{GE} = \pm 15\text{ V}; R_G = 54\text{ }\Omega$ $L = 100\text{ }\mu\text{H}$; clamped induct. load $V_{CEmax} = V_{CES} - L_S \cdot di/dt$	$T_{VJ} = 125^{\circ}\text{C}$	18		A
t_{SC} (SCSOA)	short circuit safe operating area	$V_{CE} = 600\text{ V}; V_{GE} = \pm 15\text{ V}; R_G = 54\text{ }\Omega$; non-repetitive	$T_{VJ} = 125^{\circ}\text{C}$	10		μs
R_{thJC}	thermal resistance junction to case	(per IGBT)			2.75	K/W
R_{thCH}	thermal resistance case to heatsink	(per IGBT)		0.9		K/W

Brake Chopper D7

Symbol	Definitions	Conditions	Ratings			
			min.	typ.	max.	Unit
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 150^{\circ}\text{C}$			600	V
I_{F25}	forward current	$T_C = 25^{\circ}\text{C}$			21	A
I_{F80}		$T_C = 80^{\circ}\text{C}$			14	A
V_F	forward voltage	$I_F = 10\text{ A}; V_{GE} = 0\text{ V}$		1.25	2.1	V V
I_R	reverse current	$V_R = V_{RRM}$		0.2	0.06	mA mA
I_{RM}	max. reverse recovery current	$V_R = 100\text{ V}; I_F = 12\text{ A}$ $di_F/dt = -100\text{ A}/\mu\text{s}$	$T_{VJ} = 100^{\circ}\text{C}$	3.5		A
t_{rr}	reverse recovery time			80		ns
R_{thJC}	thermal resistance junction to case	(per diode)			2.5	K/W
R_{thCH}	thermal resistance case to heatsink	(per diode)		0.85		K/W

 $T_C = 25^{\circ}\text{C}$ unless otherwise stated

Input Rectifier Bridge D8 - D13

Symbol	Definitions	Conditions	Maximum Ratings		
V _{RRM}	max. repetitive reverse voltage		1600		V
I _{FAV}	average forward current	sine 180°	T _C = 80°C	22	A
I _{DAVM}	max. average DC output current	rectangular; d = 1/3; bridge	T _C = 80°C	61	A
I _{FSM}	max. surge forward current	t = 10 ms; sine 50 Hz	T _C = 25°C	300	A
P _{tot}	total power dissipation		T _C = 25°C	50	W

Symbol	Conditions	Characteristic Values			
		min.	typ.	max.	
V _F	forward voltage	I _F = 30 A	T _{VJ} = 25°C T _{VJ} = 125°C	1.1 1.2	V V
I _R	reverse current	V _R = V _{RRM}	T _{VJ} = 25°C T _{VJ} = 125°C	0.3	0.01 mA mA
R _{thJC}	thermal resistance junction to case	(per diode)	T _{VJ} = 25°C		2.1 K/W
R _{thCH}	thermal resistance case to heatsink	(per diode)		0.7	K/W


Temperature Sensor NTC

				Ratings			
Symbol	Definitions	Conditions	min.	typ.	max.	Unit	
R ₂₅	resistance	T _C = 25°C	4.45	4.7	5.0	kΩ	
B _{25/85}				3510		K	

Module

			Ratings			
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
T _{VJ}	operating temperature		-40		150	°C
T _{VJM}	max. virtual junction temperature				150	°C
T _{stg}	storage temperature		-40		125	°C
V _{ISOL}	isolation voltage	I _{ISOL} ≤ 1 mA; 50/60 Hz			2500	V~
M _d	mounting torque	(M4)	2.0		2.2	Nm
d _S	creep distance on surface		12.7			mm
d _A	strike distance through air		9.6			mm
Weight				40		g

Equivalent Circuits for Simulation




$\overrightarrow{V_0}$			Ratings			
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_0 R_0	<i>rectifier diode</i>	D8 - D13	$T_{VJ} = 125^{\circ}\text{C}$	0.90 12		V m Ω
V_0 R_0	<i>IGBT</i>	T1 - T6	$T_{VJ} = 125^{\circ}\text{C}$	1.4 150		V m Ω
V_0 R_0	<i>free wheeling diode</i>	D1 - D6	$T_{VJ} = 125^{\circ}\text{C}$	1.25 26		V m Ω
V_0 R_0	<i>IGBT</i>	T7	$T_{VJ} = 125^{\circ}\text{C}$	1.4 150		V m Ω
V_0 R_0	<i>free wheeling diode</i>	D7	$T_{VJ} = 125^{\circ}\text{C}$	1.25 26		V m Ω

$T_C = 25^\circ\text{C}$ unless otherwise stated

Outline Drawing

Dimensions in mm (1 mm = 0.0394")

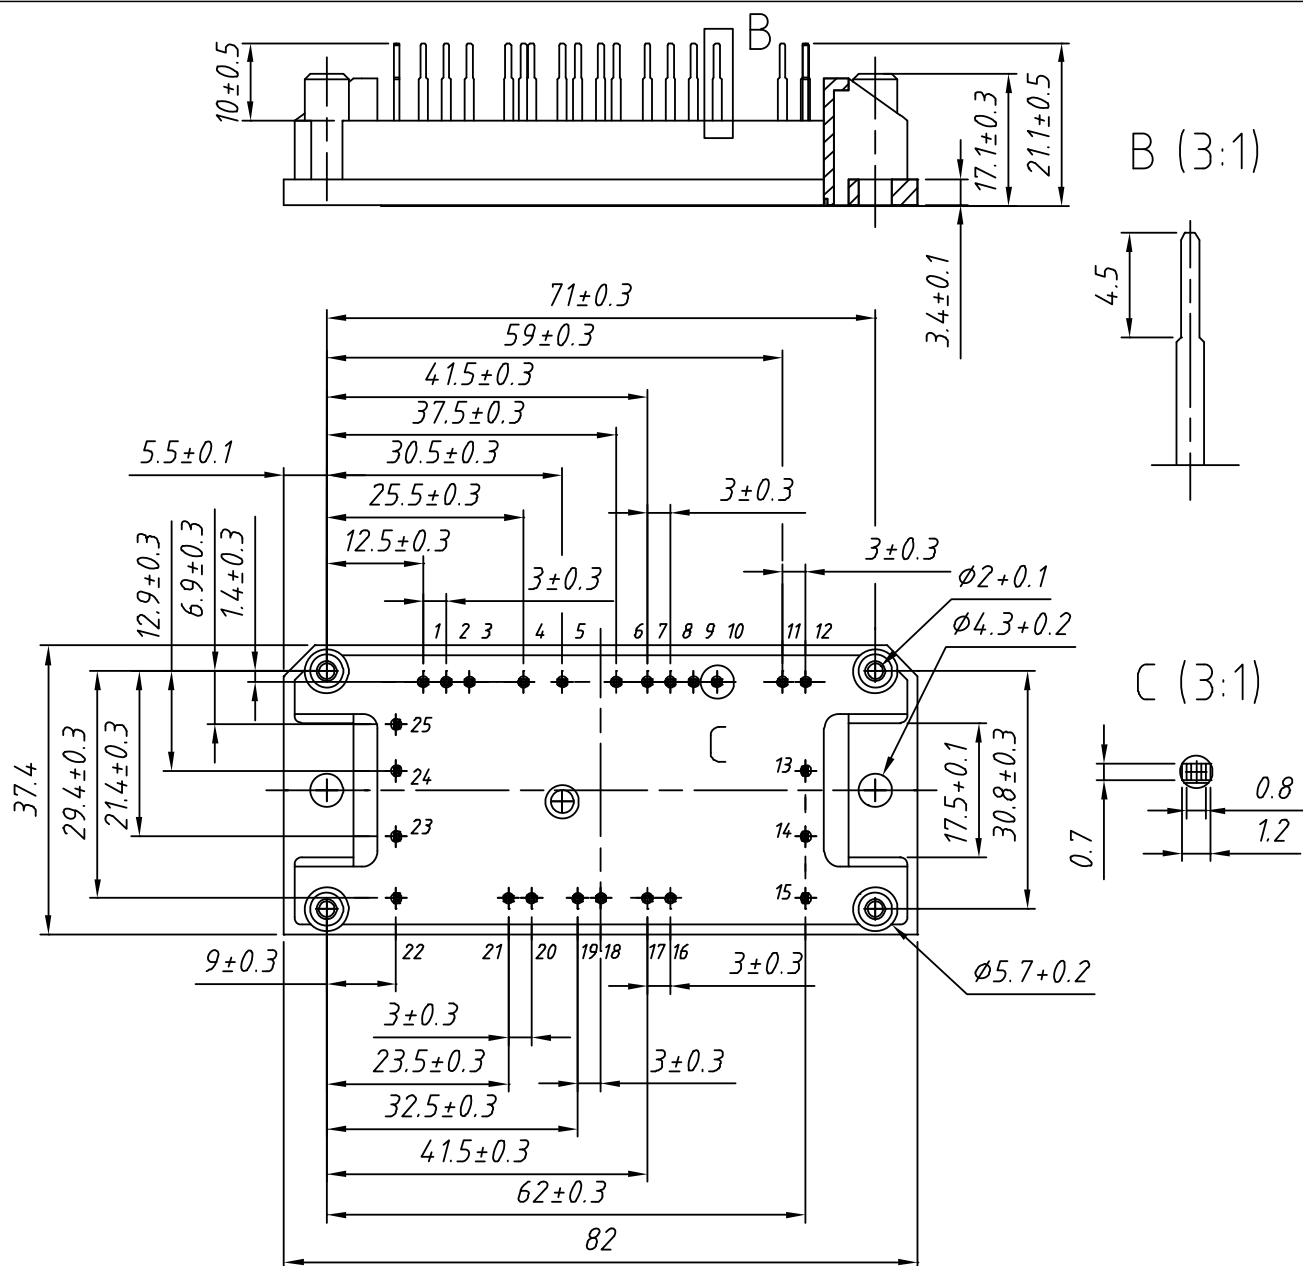

Product Marking

Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Ordering Code
Standard	MUBW 10-06A6K	MUBW10-06A6K	Box	10	500 087