

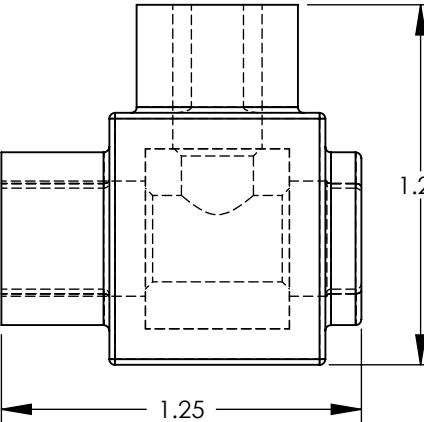


THREE PORT CONNECTOR BLOCK SHOWN
WITH PLASTIC CLOSURE PLUGS REMOVED.
SEE TABLE FOR DIMENSIONS OF PARTS
WITH ADDITIONAL PORTS

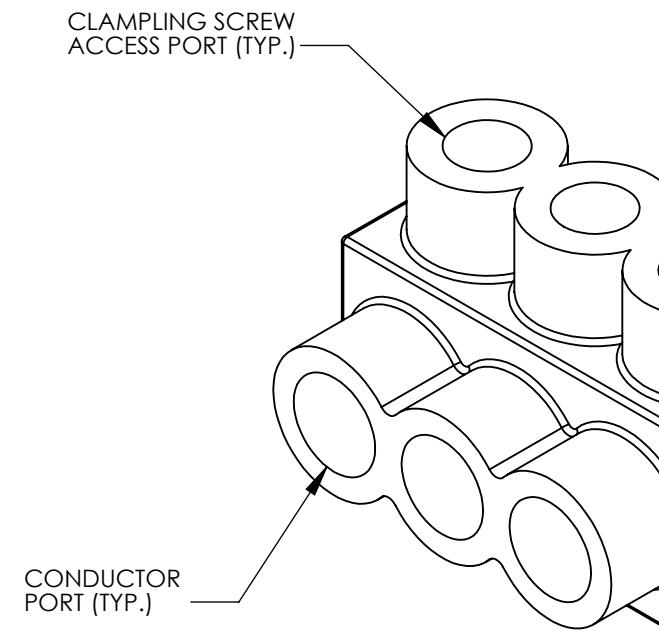

PANDUIT FINISHED GOODS PIN	CONDUCTOR RANGE	HEX KEY	SCREW Q.TY.	CAP (SCREW PORT) Q.TY.	CAP (WIRE PORT) Q.TY.	A	L	N	TIGHTENING TORQUE
PCSB600-2S-4Y	600 kcmil - #6 STR	3/8	2	2	2	2.72	2.469	2	3.75 in/lb
PCSB600-3S-3Y		3/8	3	3	3	4.00	3.750	3	
PCSB600-4S-2Y		3/8	4	4	4	5.28	5.031	4	
PCSB600-5S-2Y		3/8	5	5	5	6.56	6.312	5	
PCSB600-6S-2Y		3/8	6	6	6	7.84	7.593	6	
PCSB600-8S-2Y		3/8	8	8	8	10.41	10.155	8	
PCSB600-10S-1Y		3/8	10	10	20	12.97	12.717	10	
PCSB600-12S-1Y		3/8	12	12	24	15.53	15.279	12	
PCSB600-14S-1Y		3/8	14	14	28	18.09	17.841	14	

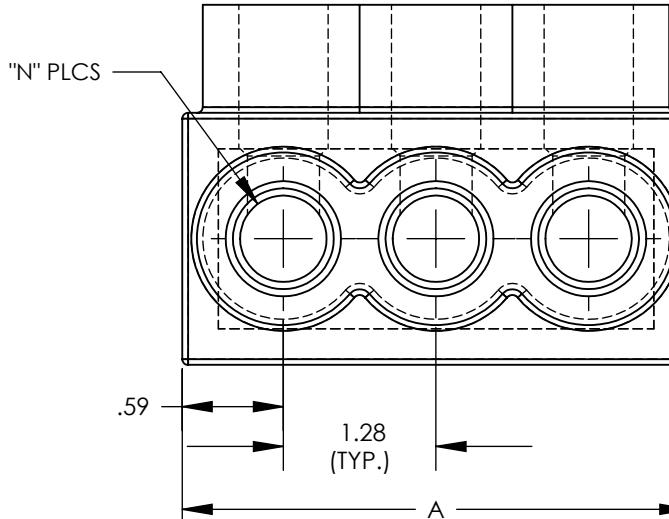

LISTED



CERTIFIED

NOTES:

1. UL486A-UL486B LISTED, DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4
2. SEE TABLE FOR WIRE RANGE.
3. STRIP LENGTH: 1.06 +.06/-0
4. FOR TIGHTENING TORQUE SEE TABLE
5. VOLTAGE RATING: 600 V. MAX. BUILDING WIRE, 1000 V. MAX. IN SIGNS & FIXTURES.
6. TEMPERATURE RATING: 90 °C (CU9AL).
7. CONNECTOR BLOCK BODY ARE MADE FROM ALUMINUM. CONDUCTOR PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.
8. CONNECTOR TO INCLUDE TIN PLATED ALUMINUM CLAMPING SCREWS FOR EACH CONDUCTOR PORT.
9. INSULATION MATERIAL IS CLEAR PVC.
10. CLAMPING SCREW ACCESS PORTS AND ALL WIRE ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
11. ALL DIMENSIONS SHOWN ARE NOMINAL.
12. ONLY ONE CONDUCTOR PER PORT ALLOWED.
13. PACKAGE QTY: -12 = 12 PCS.
-6 = 6 PCS.
-4 = 4 PCS.
-3 = 3 PCS.
-2 = 2 PCS.
14. THIS PART IS RoHs COMPLIANT

REV 05 2/13 JHNU JHNU RGB										REVISED TITLE BLOCK			TITLE		
										MULTI-TAP INSULATED CONNECTORS PCSB600 SERIES SINGLE SIDED CUSTOMER DRAWING					
										ITEM REVISION NAME N41531BB-C41531/05					
										DATASET FILE NAME C41531/05.SLDDRW					
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					
										.X ± .XX ± .02			.XXX ± ANGLES ±		
													THIRD ANGLE PROJECTION		
REV	DATE	BY	CHK	APR	DESCRIPTION			ECN	DRAWN BY MS	DATE 8/99	CHK RLS	SCALE NONE	DRAWING NUMBER C41531_05	SHEET 1 OF 1	SIZE B