

AN5900


Switching Regulator Control Circuit

■ Outline

The AN5900 is an integrated circuit in which a PWM switching regulator control circuit and protect circuit are integrated on a single chip.

■ Features


- Soft start circuit
- 0 ~ 0.7 duty
- Protection circuit for over voltage and current
- External trigger available
- High supply voltage protection
- Low supply voltage protection
- Reference voltage provided by external zener diode
- Compact 9-lead plastic SIL package for higher flexibility in PCB design

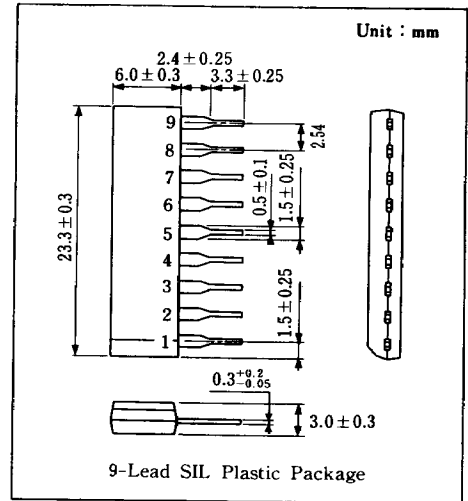

■ Pin

Pin No.	Pin Name
1	Ref. Voltage
2	Feedback
3	Oscillator
4	Output
5	GND
6	V _{CC}
7	Soft Start
8	Trigger
9	Protector

■ Block Diagram

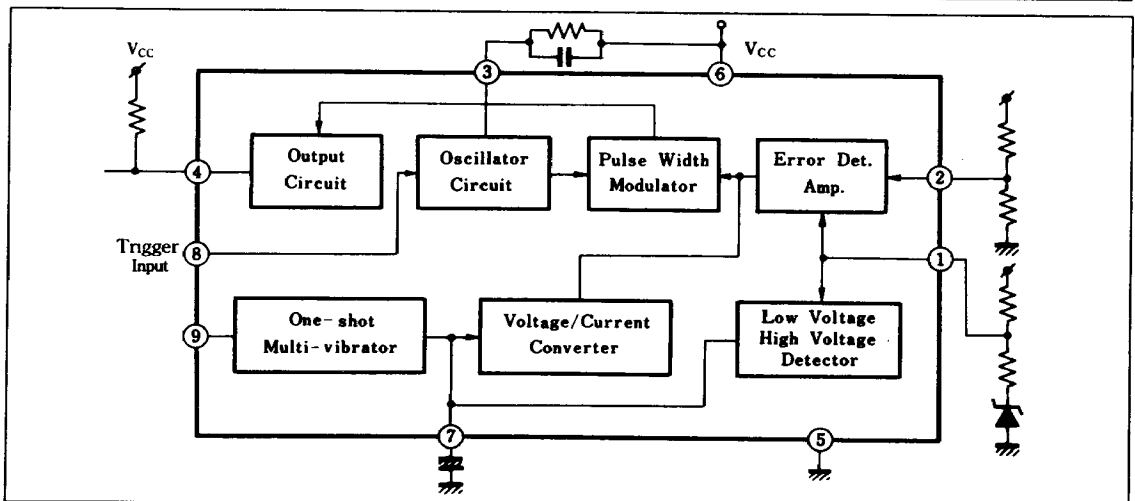

■ Absolute Maximum Ratings (Ta=25°C)


Item		Symbol	Rating		Unit
Voltage	Supply Voltage	V _{CC}	14.0		V
	Circuit Voltage	V ₆₋₅	0	+14.4	V
		V ₁ , V ₂ , V ₄₋₅	0	V ₆₋₅	V
		V ₃₋₅	3	10	V
		V ₇₋₅	0	8	V
		V ₈ , V ₉₋₅	-3	+4	V
Current	Supply Current	I ₆	18.0		mA
	Circuit Current	I ₄	-1	+50	mA _{peak}
Power Dissipation		P _D	260		mW
Local Power Dissipation (Q ₁)		P _D (Q ₁)	60		mW
Temperature	Operating Ambient Temperature	T _{opr}	-20 ~ +75		°C
	Storage Temperature	T _{stg}	-55 ~ +150		°C

Note : $\oplus$ is flow-in current to the circuit, while $\ominus$ is flow-out current

■ Electrical Characteristics ($V_{CC}=12V$, $T_a=25^{\circ}C$)

Electrical Characteristics (V _{CC} = 12V, I _B = 100μA)								
Item		Symbol	Test Circuit	Condition	min.	typ.	max.	Unit
Total Circuit Current		I _{tot}	1		8.4	10.5	12.6	mA
Oscillation Frequency		f _{osc}	1		14.0	14.8	15.6	kHz
Output Pulse Duty (max.)		t _{W(duty)}	1		67	72	77	%
Output Pulse Duty (min.)		t _{W(duty)}	1			0	0	%
Output Saturation Voltage (1)		V _{O(sat)(1)}	2	I ₄ = 10mA		0.10	0.30	V
Output Saturation Voltage (2)		V _{O(sat)(2)}	2	I ₄ = 50mA		0.62	1.00	V
High Supply Voltage Protection		V _{HVP}	1		13.2	13.9	14.6	V
Low Supply Voltage Protection		V _{LVP}	1		4.8	5.2	5.6	V
Input Voltage	Ext. Trigger Start	V _{t1}	1		0.66	0.71	0.76	V
	One-Shot Multi Start	V _{t2}	1		0.68	0.73	0.78	V

Test Circuit 1 (I_{tot} , f_{osc} , $t_{W(\text{duty})}$, V_{HVP} , V_{LVP} , V_{t1} , V_{t2})

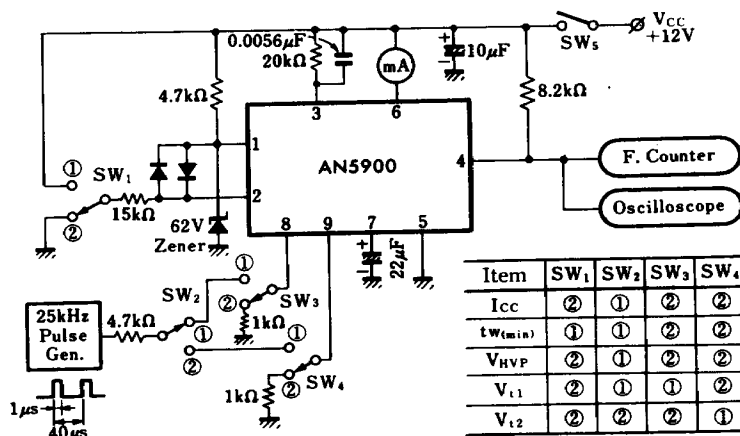

Item	Characteritics Value	Unit
Output Voltage	5.0	V
Output Current	10.0	A
Output Voltage Variable Range	4.5 ~ 5.8	V
Max. Output Voltage	68	W
Effective Efficiency	68	%
Output Voltage Stability	0.05% + <10mV	mV
Output Rise Time (full load)	80	ms
Output Rise Time (no load)	70	ms
Output Fall Time (full load)	30	ms