


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

1205-30-9

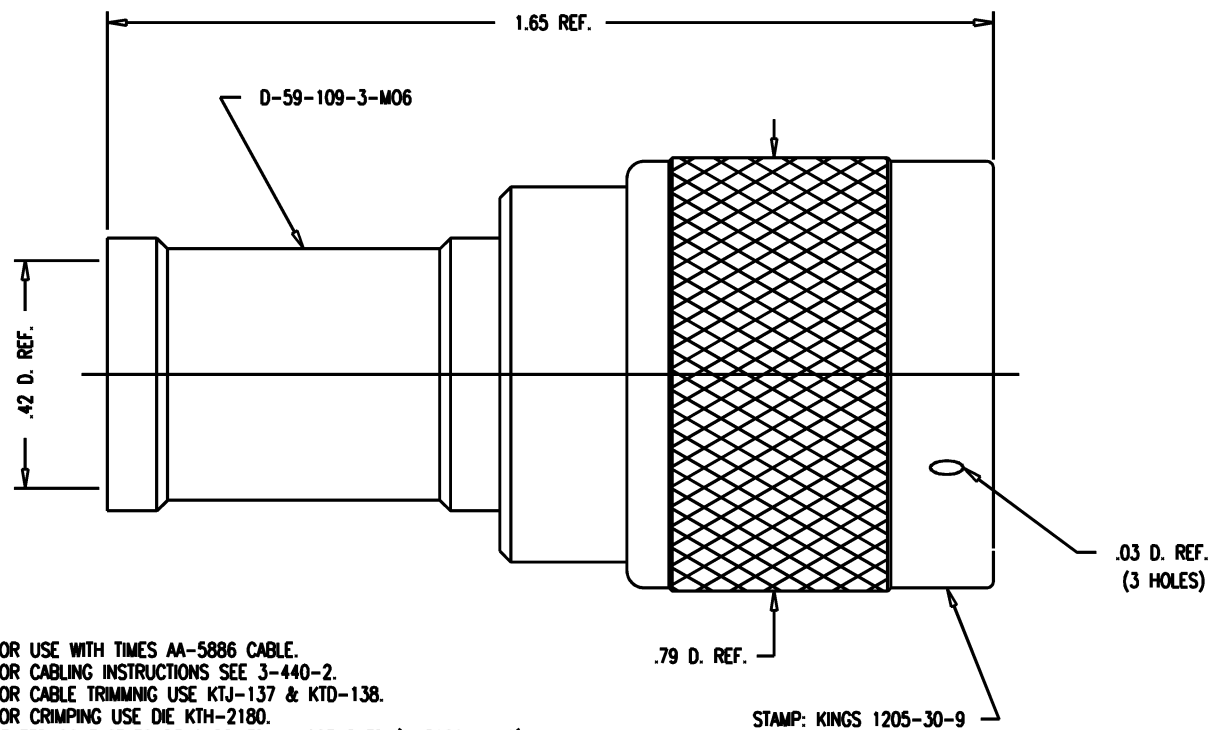

NOTES:

1. FOR USE WITH TIMES AA-5886 CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-440-2.
3. FOR CABLE TRIMMING USE KTJ-137 & KTD-138.
4. FOR CRIMPING USE DIE KTH-2180.
5. CENTER CONTACT TO BE SUPPLIED UNASSEMBLED (1-5926-1MA9).
6. INTERFACE PER MIL-STD-348, FIG. 304-1.
7. MARK PACKAGE: KINGS 1205-30-9
XX XX (DATE CODE)
8. MATERIALS:
INSULATOR: TEFLON, ASTM-D1457
K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
GASKET: SILICONE RUBBER, ZZ-R-765
OUTER CONTACT } PHOSPHOR BRONZE, QQ-B-750
C-RING }
ALL OTHER METAL PARTS: BRASS, QQ-B-626
9. FINISHES:
CENTER CONTACT: HARD GOLD PLATE, PERMIL-G-45204
OUTER CONTACT: SILVER PLATE, QQ-S-365
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
10. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 1000 VRMS
FREQUENCY RANGE: DC TO 11 GHz.

STAMP: KINGS 1205-30-9

REVISIONS

ISSUE	CHANGES
1	CN 33030 A REDRAWN WJM 04/15/91

WJM0963

SCALE 4:1

APPROX SURFACE AREA

WAS: E-15850

USED ON

REF:

PLUG, N

DRAWN WJM	DATE 04/15/91
DESIGN JT	DATE 05/03/91
APPR. VLS	DATE 05/04/91

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

1205-30-9

GSD