

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

D

C

B


A

D


C

B


A

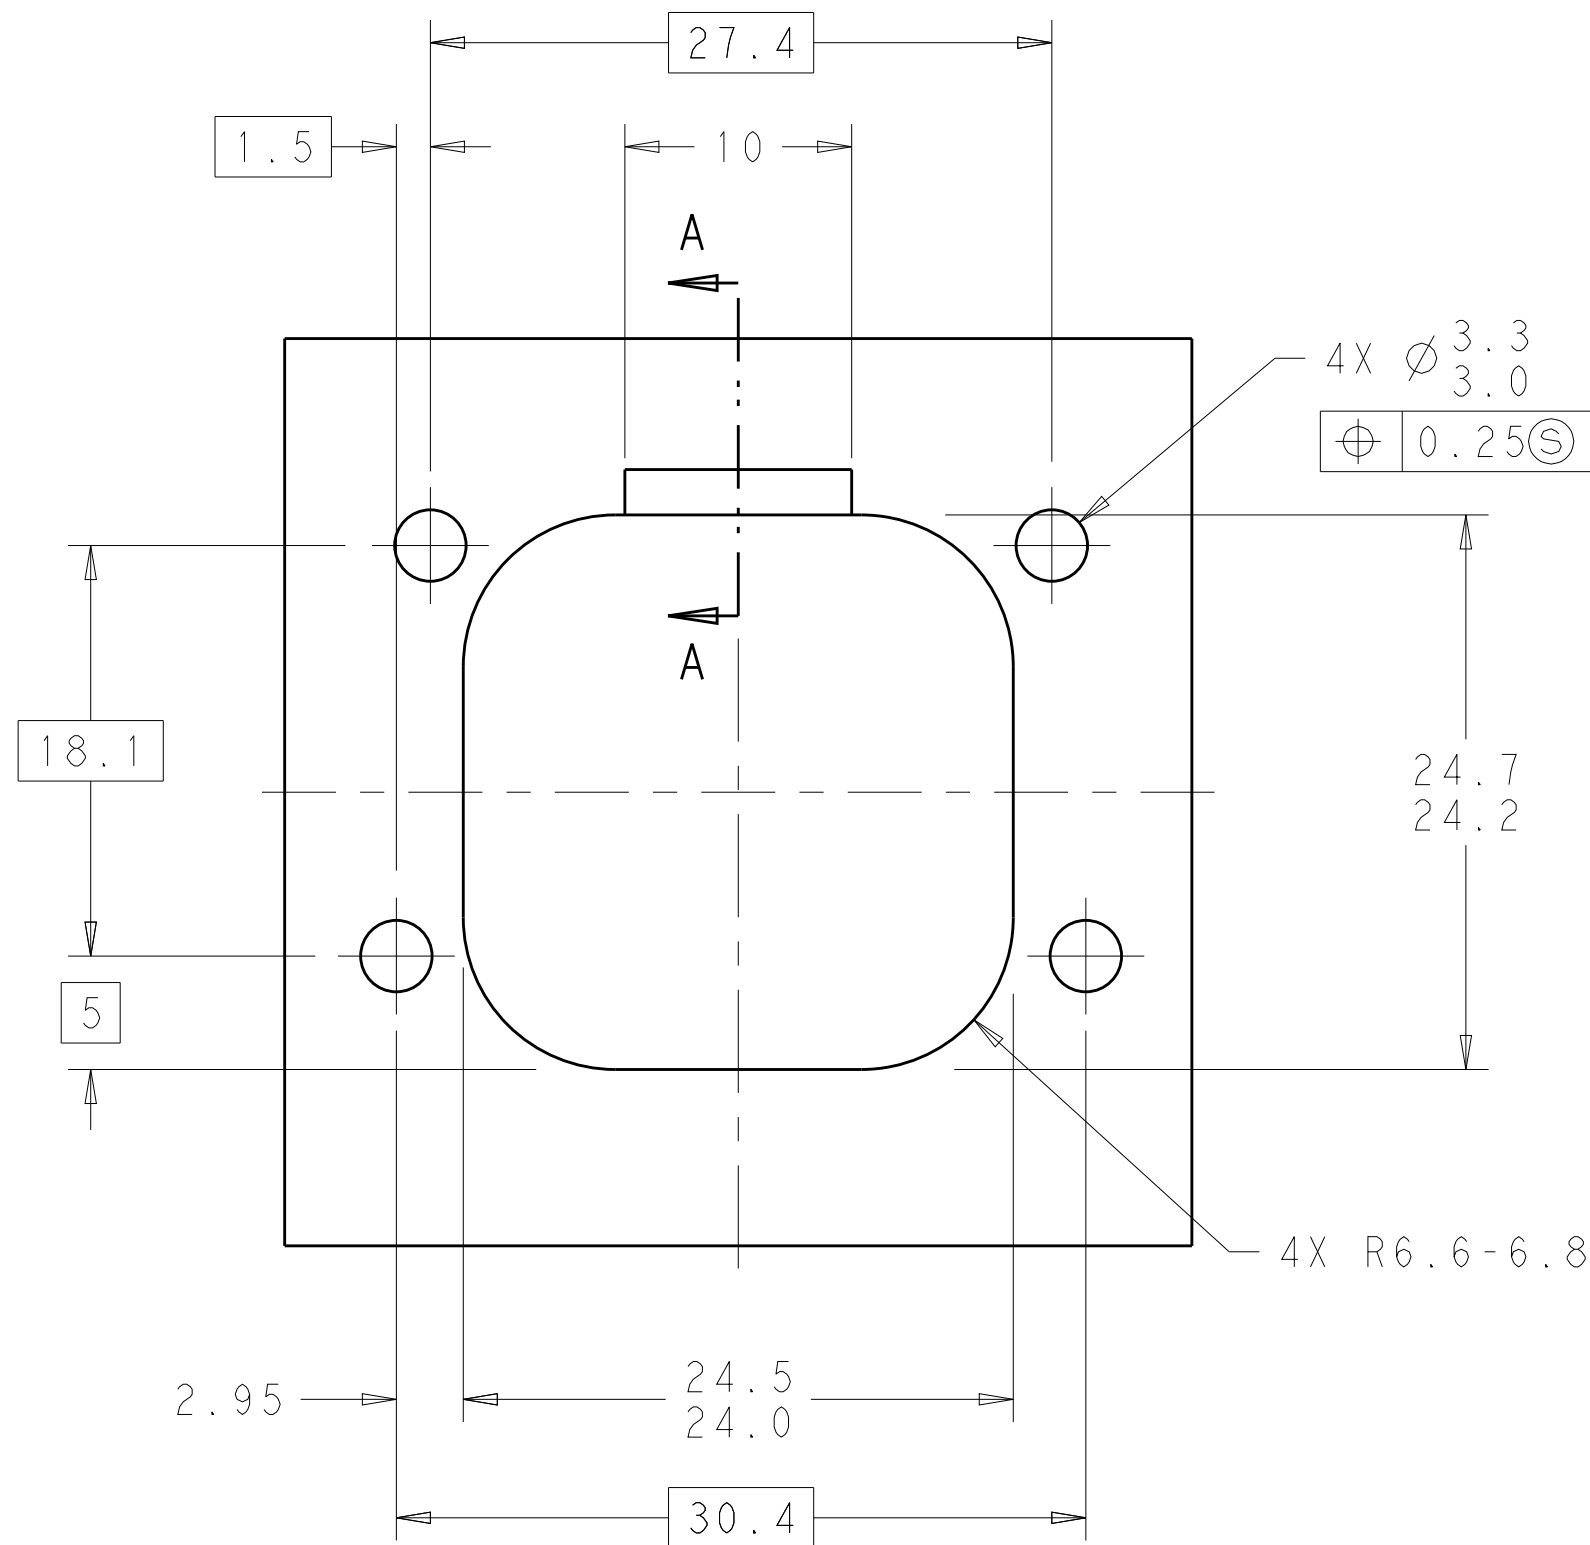




RECOMMENDED MOUNTING HOLE LAYOUT
FOR 5.0 MAX THICK PANEL

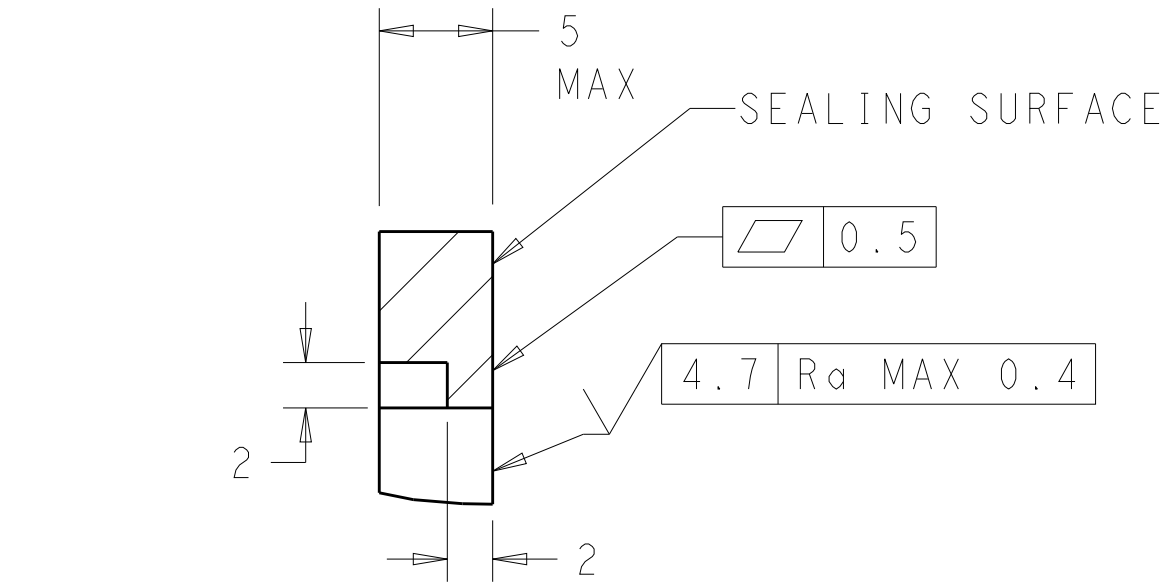


SECTION A-A
OPTIONAL CONSTRUCTION IF PANEL
THICKNESS IS GREATER THAN 2.0

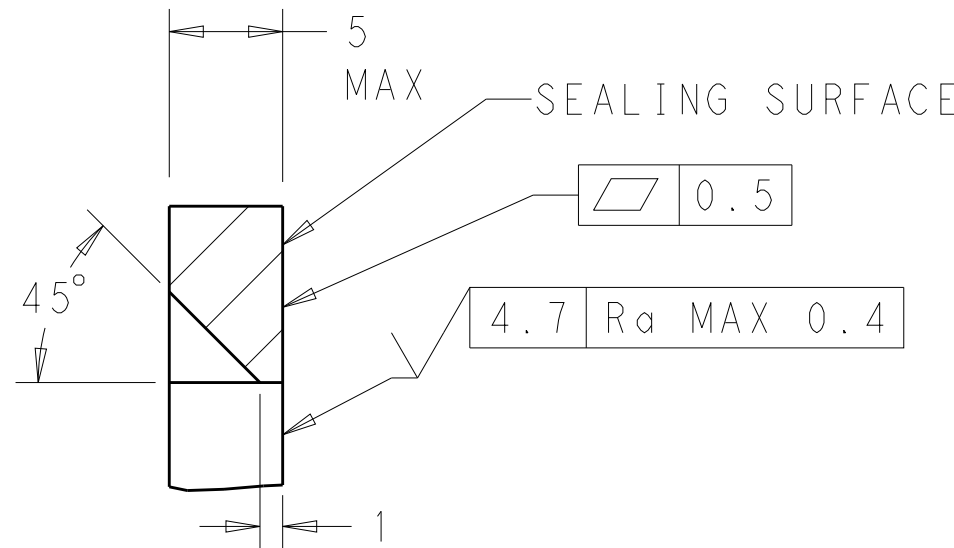

SECTION A-A
OPTIONAL CONSTRUCTION IF PANEL
THICKNESS IS GREATER THAN 2.0

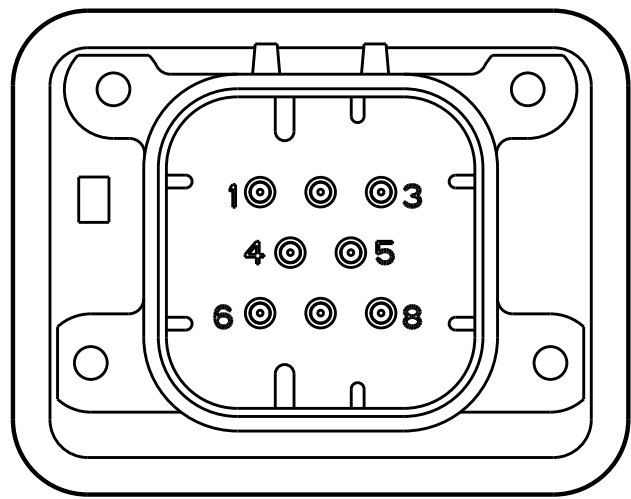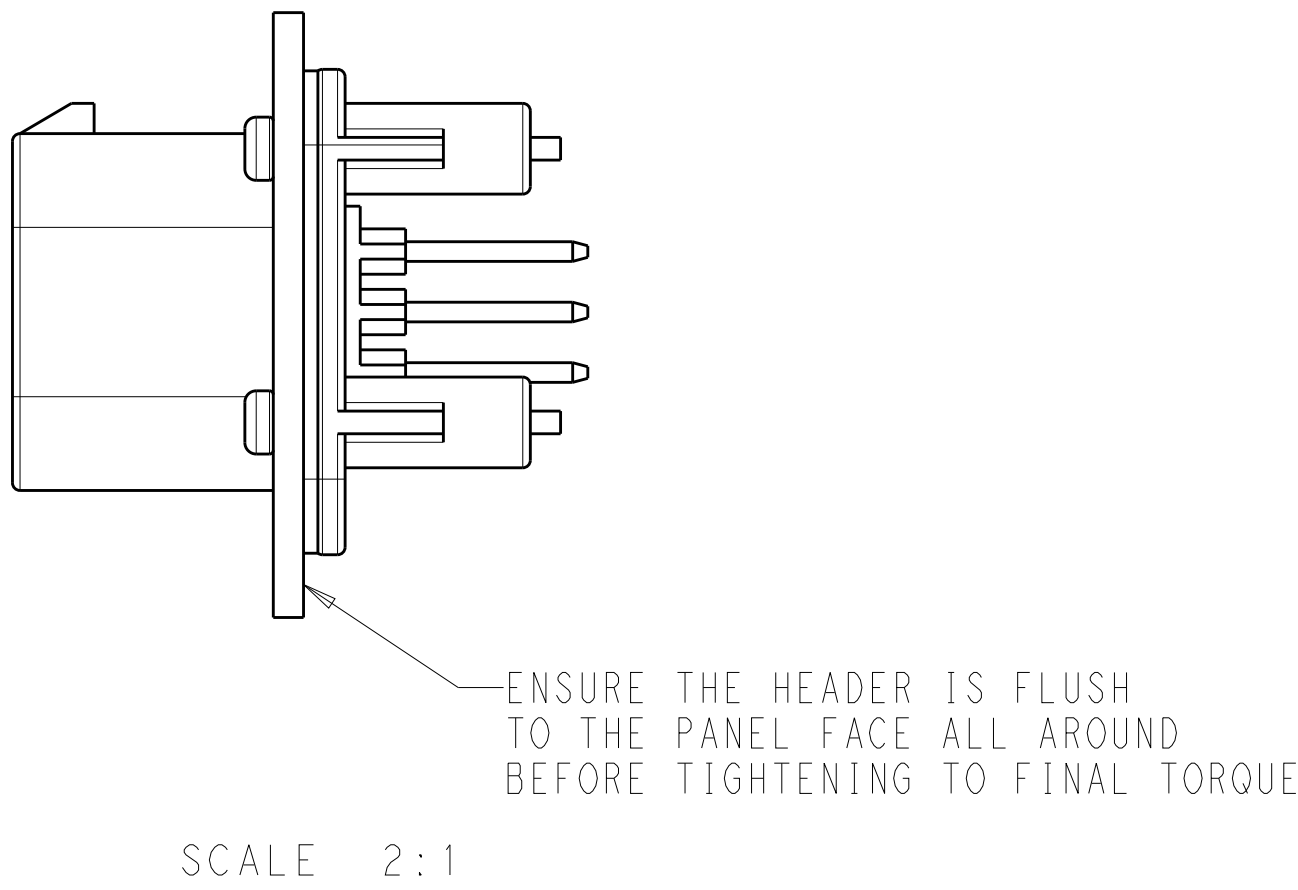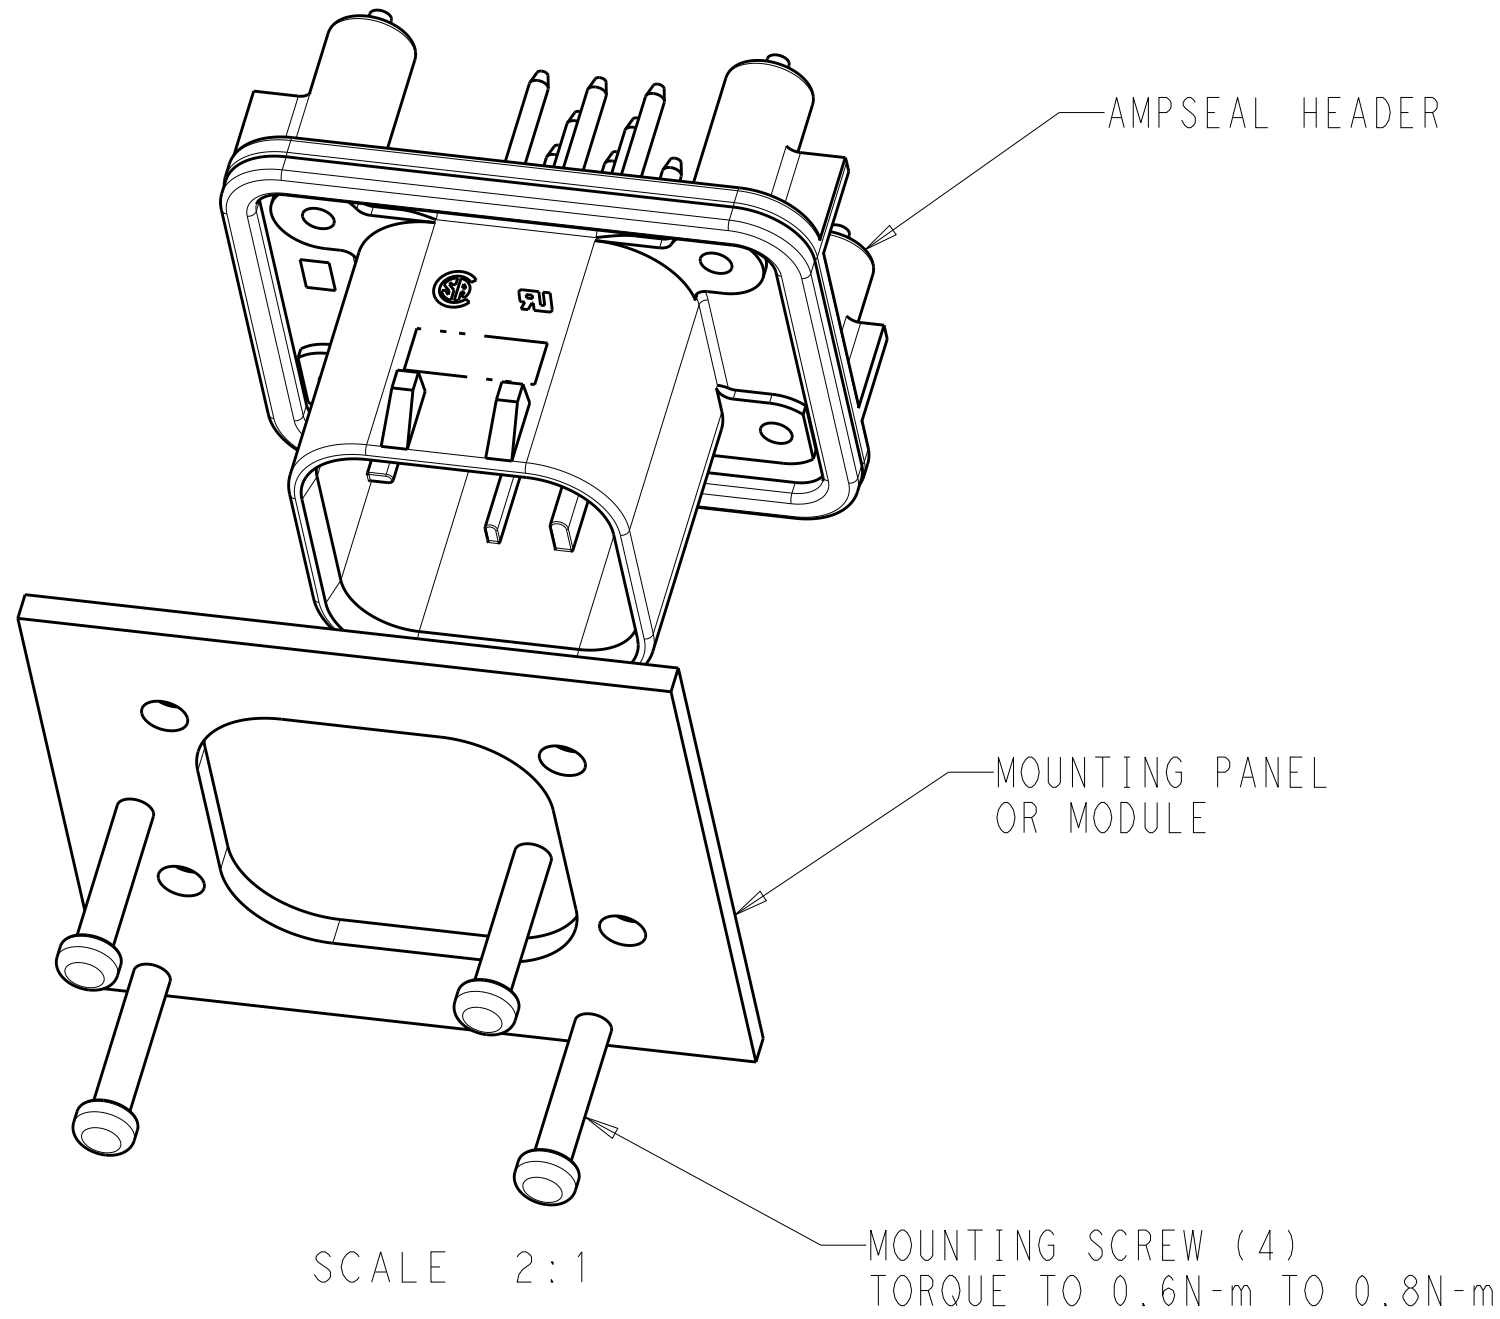

776276-2 & 1-776276-2
KEY LOCATION
SCALE 2:1

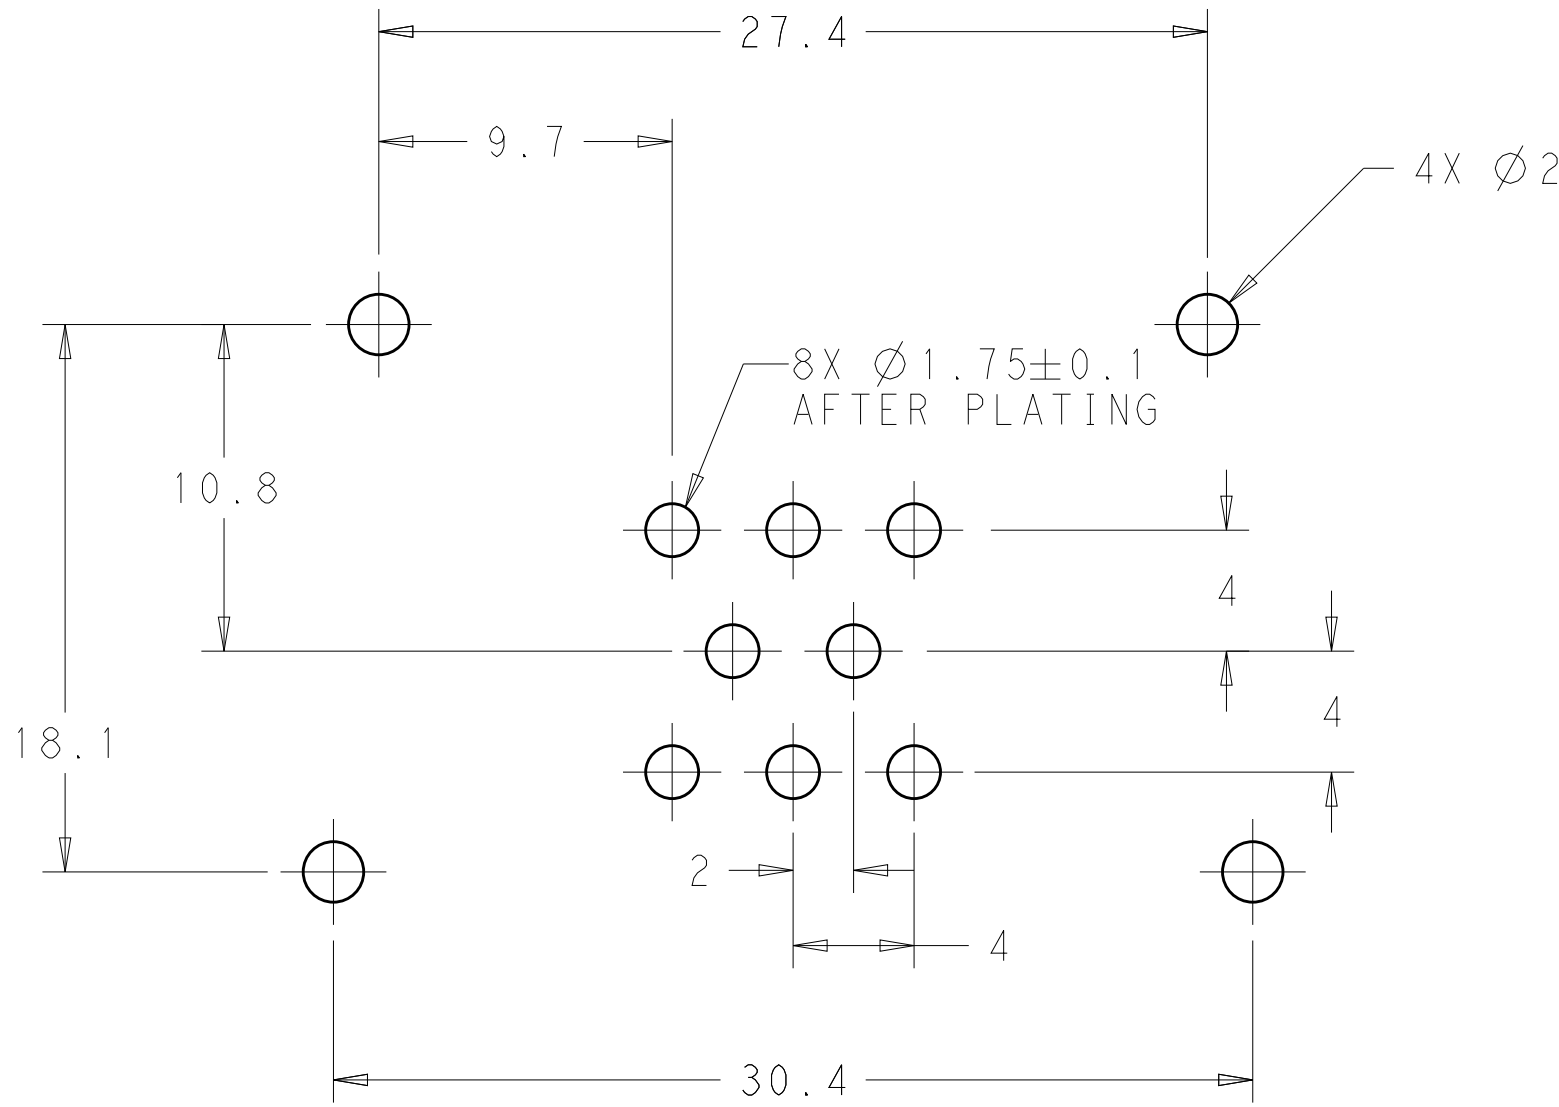

RECOMMENDED P.C. BOARD LAYOUT
FOR 1.57 THICK P.C. BOARD

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. STRAUSSER 21 JAN 2010	TE Connectivity	
DIMENSIONS:		CHK D. STRAUSSER 22 MAR 2010		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. STRAUSSER 27 APR 2010	NAME	ASSEMBLY, HEADER 8 POSITION VERTICAL, AMPSEAL WITH FLANGE SEAL
	0 PLC ±°	PRODUCT SPEC	SIZE	114-16016
	1 PLC ±0.2	APPLICATION SPEC	CAGE CODE	776276
	2 PLC ±0.13	WEIGHT	RESTRICTED TO	-
MATERIAL	FINISH	CUSTOMER DRAWING	SCALE	4:1
		SHEET 2 OF 2		REV B9