


features

- Surface mount
- Operating temperature: -40°C ~ +125°C
- Flat top suitable for high speed pick-and-place components
- Excellent high frequency applications
- High Q factors and self-resonant frequency values
- Marking: White body color with no marking (0402)
Black body color with white marking (0603, 0805, 1008)
- Products with lead-free terminations meet EU RoHS requirements
- AEC-Q200 Qualified

dimensions and construction

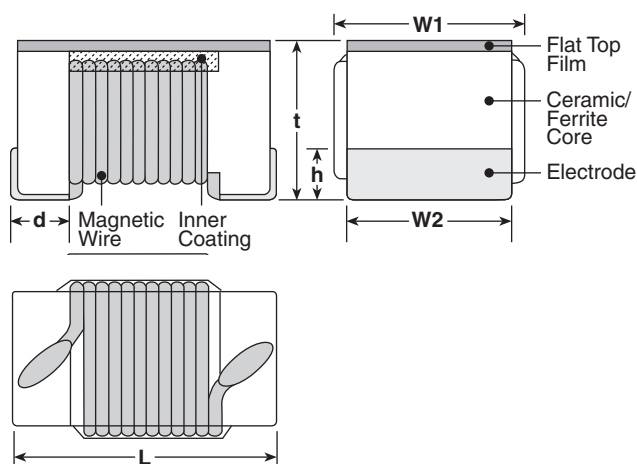

Size Code	Dimensions inches (mm)					
	L	W1	W2	t	h	d
KQT0402	.039±.004 (1.0±0.1)	.02±.004 (0.5±0.1)	.02±.004 (0.5±0.1)	.022±.004 (0.55±0.1)	.006±.004 (0.15±0.1)	.01±.004 (0.25±0.1)
KQ0603	.063±.004 (1.6±0.1)	.039±.004 (1.0±0.1)	.033±.004 (0.85±0.1)	.035±.004 (0.9±0.1)	.01±.006 (0.25±0.15)	.014±.004 (0.35±0.1)
KQ0805	.079±.008 (2.0±0.2)	.059±.008 (1.5±0.2) (3.3nH-390nH)	.053±.004 (1.35±0.1)	.051±.008 (1.3±0.2)	.016±.006 (0.40±0.15)	.018±.004 (0.45±0.1)
		.063±.008 (1.6±0.2) (470nH-820nH)				
KQ1008	.098±.008 (2.5±0.2)	.087±.008 (2.2±0.2)	.079±.004 (2.0±0.1)	.071 ^{+.008} ₋₀ (1.8 ^{+.02} ₋₀)	.018±.006 (0.45±0.15)	.018±.004 (0.45±0.1)

ordering information

New Part #	KQ	1008	T	TE	10N	J
Type	KQ KQT	Size Code 0402 0603 0805 1008	Termination Material T: Sn	Packaging TP: 2mm pitch paper (0402: 10,000 pieces/reel) TD: 7" paper tape (0402: 2,000 pieces/reel) TE: 7" embossed plastic (0603, 0805, 1008: 2,000 pieces/reel)	Nominal Inductance 3 digits: 10N: 10nH R10: 0.1μH 1R0: 1.0μH	Tolerance B: ±0.1nH C: ±0.2nH G: ±2% H: ±3% J: ±5% K: ±10% M: ±20%

For further information on packaging, please refer to Appendix A.

applications and ratings

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency (MHz)	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQT0402T**1N0*	—	1.0	250	B: ±0.1nH C: ±0.2nH	16	250	11000	0.045	1360
KQT0402T**1N9*		1.9			9600		0.070	1040	
KQT0402T**2N0*		2.0							
KQT0402T**2N2*		2.2			8000		0.068	960	
KQT0402T**2N4*		2.4					0.120	700	
KQT0402T**2N7*		2.7		H: ±3% J: ±5% K: ±10%	17		7200	0.066	840
KQT0402T**3N3*		3.3							
KQT0402T**3N6*		3.6			6000		0.091	800	
KQT0402T**3N9*		3.9							
KQT0402T**4N3*		4.3			20		5800	0.083	760
KQT0402T**4N7*		4.7							
KQT0402T**5N1*		5.1			22		4800	0.104	680
KQT0402T**5N6*		5.6							
KQT0402T**6N2*		6.2			20		4400	0.150	650
KQT0402T**6N8*		6.8							
KQT0402T**7N5*		7.5			21		4160	0.150	650
KQT0402T**8N2*		8.2							
KQT0402T**8N7*		8.7			24		3900	0.195	480
KQT0402T**9N0*		9.0							
KQT0402T**9N5*		9.5			24		3680	0.120	640
KQT0402T**10N*		10							
KQT0402T**11N*		11			25		3600	0.180	560
KQT0402T**12N*		12							
KQT0402T**13N*		13			24		3450	0.172	500
KQT0402T**15N*		15							
KQT0402T**16N*		16			25		3280	0.200	450
KQT0402T**18N*		18							
KQT0402T**19N*		19			25		3100	0.230	400
KQT0402T**20N*		20							
KQT0402T**22N*		22			24		3040	0.202	
KQT0402T**23N*		23							
KQT0402T**24N*		24			25		3000	0.250	
KQT0402T**27N*		27							
KQT0402T**30N*		30			25		2800	0.323	
KQT0402T**33N*		33							
KQT0402T**34N*		34			24		2720	0.214	
KQT0402T**36N*		36							
KQT0402T**39N*		39			25		2700	0.322	
KQT0402T**40N*		40							
KQT0402T**43N*		43			20		2480	0.298	
KQT0402T**47N*		47							
KQT0402T**51N*		51			25		2400	0.354	
KQT0402T**56N*		56							
KQT0402T**68N*		68			22		2320	0.560	
KQT0402T**82N*		82							
KQT0402T**R10*		100			22		2300	0.550	
KQT0402T**R12*		120							

* Add tolerancing character (B, C, G, H, J, K, M)

** Add packaging code

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/14

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency (MHz)	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQ0603TTE1N6*	C	1.6	250	J: ±5% K: ±10%	24	250	12500	0.03	700
KQ0603TTE1N8*	0	1.8			16			0.045	
KQ0603TTE3N3*	X	3.3			22		6900	0.055	
KQ0603TTE3N6*	E	3.6						0.063	
KQ0603TTE3N9*	1	3.9						0.08	
KQ0603TTE4N3*	F	4.3					5900	0.063	
KQ0603TTE4N7*	G	4.7			20		5800	0.116	
KQ0603TTE5N1*	Y	5.1						0.115	
KQ0603TTE6N8*	2	6.8			27		0.11		
KQ0603TTE7N5*	H	7.5			28		4800	0.106	
KQ0603TTE8N2*	A	8.2		0.12					
KQ0603TTE8N7*	J	8.7		4600			0.109		
KQ0603TTE9N5*	B	9.5		4800			0.125		
KQ0603TTE10N*	3	10			31		0.13		
KQ0603TTE11N*	K	11		33	4000		0.086		
KQ0603TTE12N*	4	12		35			0.13		
KQ0603TTE15N*	5	15					0.17		
KQ0603TTE16N*	L	16		34			3300	0.104	
KQ0603TTE18N*	6	18		35	3100		0.17		
KQ0603TTE22N*	7	22		38	3000		0.19		
KQ0603TTE23N*	S	23	37	2700	0.15				
KQ0603TTE24N*	M	24		2650	0.135				
KQ0603TTE27N*	8	27		40	2800	0.22			
KQ0603TTE30N*	N	30		37	2250	0.144			
KQ0603TTE33N*	9	33		40	2300	0.22			
KQ0603TTE36N*	P	36		38	2080	0.25			
KQ0603TTE39N*	0	39		40	2200				
KQ0603TTE43N*	Q	43		39	2000	0.28			
KQ0603TTE47N*	1	47		200	38	200	2000	0.28	
KQ0603TTE51N*	T	51					1900	0.30	
KQ0603TTE56N*	2	56				0.31			
KQ0603TTE68N*	3	68			37	1700	0.34		
KQ0603TTE72N*	4	72	34	150	0.49				
KQ0603TTE82N*	5	82			0.54				
KQ0603TTER10*	6	100			1400	0.58			
KQ0603TTER11*	7	110			1350	0.61			
KQ0603TTER12*	8	120	32		1300	0.65			
KQ0603TTER15*	9	150			1400	1.4			
KQ0603TTER18*	0	180			1300	2.2			
KQ0603TTER20*	U	200	25	100	1200	2.3			
KQ0603TTER21*	V	210				2.5			
KQ0603TTER22*	1	220			1000	2.4			
KQ0603TTER25*	W	250			24	900	2.3		
KQ0603TTER27*	2	270	840			3.17			
KQ0603TTER30*	X	300	800			3.0			
KQ0603TTER33*	3	330	30		50	700	3.7		
KQ0603TTER39*	4	390		640		1.21			
KQ0603TTER47*	5	470		610		1.26			
KQ0603TTER51*	V	510		560		2.09			
KQ0603TTER56*	6	560	590	1.89					
KQ0603TTER62*	W	620							

* Add tolerance character (B, C, G, H, J, K, M) For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/14

applications and ratings (continued)

	Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency (MHz)	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)			
NEW	KQ0603TTER68*	7	680	50	J: ±5% K: ±10%	30	50	540	1.97	140			
	KQ0603TTER72*	C	720					530	2.04	130			
	KQ0603TTER75*	X	750					490	3.09	110			
	KQ0603TTER82*	8	820					480	2.95	120			
KQ0603TTER91*	Y	910	440					5.13	90				
KQ0603TTE1R0*	9	1000	400					5.45	80				
KQ0603TTE1R2*	0	1200	250					G: ±2% J: ±5% K: ±10%	50	1500	6000	0.08	600
KQ0805TTE3N3*	0	3.3								1000	5500	0.11	
KQ0805TTE6N8*	1	6.8		4700	0.12	500							
KQ0805TTE8N2*	2	8.2		4000	0.15								
KQ0805TTE12N*	3	12		3400	0.17								
KQ0805TTE18N*	5	18		3300	0.20								
KQ0805TTE20N*	Y	20		200	G: ±2% J: ±5% K: ±10%	55	2600		0.22	500			
KQ0805TTE22N*	6	22					2500		0.25				
KQ0805TTE27N*	7	27					2050		0.27				
KQ0805TTE33N*	8	33					2000		0.29				
KQ0805TTE39N*	9	39				60	1650		0.34				
KQ0805TTE43N*	4	43					1550		0.34				
KQ0805TTE47N*	0	47	1450				0.38						
KQ0805TTE56N*	1	56	1300				0.42						
KQ0805TTE68N*	2	68	150			G: ±2% J: ±5% K: ±10%	65	1200	0.46	400			
KQ0805TTE82N*	3	82						1100	0.51				
KQ0805TTER10*	4	100						920	0.56				
KQ0805TTER12*	5	120						870	0.64				
KQ0805TTER15*	6	150		50	850		0.70						
KQ0805TTER16*	H	160			48		650	1.0					
KQ0805TTER17*	J	170					600	1.4					
KQ0805TTER18*	7	180					560	1.5					
KQ0805TTER19*	D	190		375			1.76						
KQ0805TTER20*	E	200		100	J: ±5% K: ±10%		33	100	340	1.9	250		
KQ0805TTER21*	F	210							188	2.2	230		
KQ0805TTER22*	8	220					23		50	215	2.35	190	
KQ0805TTER23*	K	230	4100			0.08				1000			
KQ0805TTER24*	L	240	3300			0.09							
KQ0805TTER25*	G	250	3000			0.10							
KQ0805TTER27*	9	270	2500			0.11							
KQ0805TTER33*	0	330	2400			0.12							
KQ0805TTER39*	1	390	1600	0.13									
KQ0805TTER47*	2	470	50	J: ±5% K: ±10% M: ±20%	50	1600	0.14						
KQ0805TTER56*	3	560				1500	0.15						
KQ0805TTER68*	4	680				0.16							
KQ0805TTER82*	5	820											
KQ1008TTE10N*	10N	10	50	J: ±5% K: ±10% M: ±20%	50	500	4100	0.08	1000				
KQ1008TTE12N*	12N	12					3300	0.09					
KQ1008TTE15N*	15N	15					3000	0.10					
KQ1008TTE18N*	18N	18					2500	0.11					
KQ1008TTE22N*	22N	22			55	350	2400	0.12					
KQ1008TTE27N*	27N	27					1600	0.13					
KQ1008TTE33N*	33N	33					1600	0.14					
KQ1008TTE39N*	39N	39					1500	0.15					
KQ1008TTE47N*	47N	47	65		0.16								

* Add tolerance character (C, G, H, J, K, M) For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/14

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency (MHz)	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	
KQ1008TTE56N*	56N	56	50	G: ±2% J: ±5% K: ±10%	65	350	1300	0.18	1000	
KQ1008TTE68N*	68N	68					1000	0.20		
KQ1008TTE82N*	82N	82						0.22		
KQ1008TTER10*	R10	100	25		45	100	1000	0.56	650	
KQ1008TTER12*	R12	120					950	0.63		
KQ1008TTER15*	R15	150					850	0.70		580
KQ1008TTER18*	R18	180					750	0.77	620	
KQ1008TTER22*	R22	220					700	0.84	500	
KQ1008TTER27*	R27	270					600	0.91	500	
KQ1008TTER33*	R33	330					570	1.05	450	
KQ1008TTER39*	R39	390					500	1.12	470	
KQ1008TTER47*	R47	470					450	1.19		
KQ1008TTER56*	R56	560					415	1.33		400
KQ1008TTER62*	R62	620					375	1.40	300	
KQ1008TTER68*	R68	680						1.47	400	
KQ1008TTER75*	R75	750						360	1.54	360
KQ1008TTER82*	R82	820					350	1.61	400	
KQ1008TTER91*	R91	910					7.9	35	50	320
KQ1008TTE1R0*	1R0	1000	290		1.75	370				
KQ1008TTE1R2*	1R2	1200	250		1.6	310				
KQ1008TTE1R5*	1R5	1500	200		1.7	300				
KQ1008TTE1R8*	1R8	1800	160		1.9	270				
KQ1008TTE2R2*	2R2	2200			2.2	250				
KQ1008TTE2R7*	2R7	2700	22		25			140	2.3	
KQ1008TTE3R3*	3R3	3300				110		2.7	230	
KQ1008TTE3R9*	3R9	3900	20			100		2.8		
KQ1008TTE4R7*	4R7	4700			90	3.1		210		
KQ1008TTE5R6*	5R6	5600	15		7.9	80		2.5	240	
KQ1008TTE6R8*	6R8	6800				70		2.8	200	
KQ1008TTE8R2*	8R2	8200				65		3.0	170	
KQ1008TTE100*	100	10000				60	3.4	150		

* Add tolerance character (C, G, H, J, K, M)

Operating Temperature Range: -40°C ~ +125°C

The operating temperature range of the coil (ambient temperature + self heating) must remain at +125°C or less

environmental applications

Performance Characteristics

Parameter	Requirements Maximum Limit	Δ L/L Δ Q/Q Typical	Test Method
Resistance to Soldering Heat	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±2.7% Δ Q/Q: ±6.6%	260°C ± 5°C, 10s ± 1s
Rapid Change of Temperature	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±2.1% Δ Q/Q: ±5.3%	-40°C (30min.)/ +125°C (30min.) 100 cycles
Low Temperature Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±1.8% Δ Q/Q: ±2.8%	-40°C ± 2°C, 1000h
High Temperature Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±1.8% Δ Q/Q: ±5.3%	125°C ± 2°C, 1000h
Moisture Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±0.9% Δ Q/Q: ±6.9%	40°C ± 2°C, 90%~95%RH, 1000h
Resistance to Solvent	No damage and marking shall remain legible	—	Accordance with MIL-STD 202F Method 215

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/14