

Echo Series® Directional Antenna

ES58-17



5725 TO 5850 MHz ECHO SERIES® DIRECTIONAL ANTENNA

The 5 GHz Echo Series® directional antennas by Laird Technologies offer high gain in a low profile package. They offer superb performance over a large operating frequency range. The antennas are constructed of a gray color UV resistant ABS plastic radome with an aluminum backplate. The antenna can be used in horizontal or vertical polarization. The galvanized bracket affords +/- 45° up or down tilt adjustment and the stainless steel hardware assures a long service life. The compact low visual impact attractive styling blends well in almost any application. The antenna comes with an integral N female connector standard.



FEATURES

- High gain / low profile
- Wide band operation – 5.7 to 5.8 GHz
- Rugged and weatherproof
- Low end loading and low visual impact
- Vertical or horizontal polarization
- Type N female connector

MARKETS

- 5 GHz wireless LAN applications
- Client antennas
- Point-to-point links
- Point-to-multipoint systems
- WiMAX

ANTENNA PATTERNS

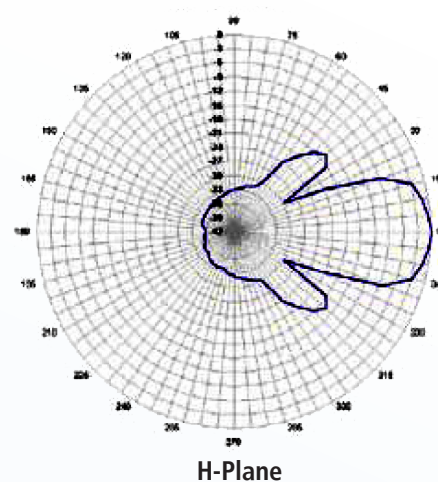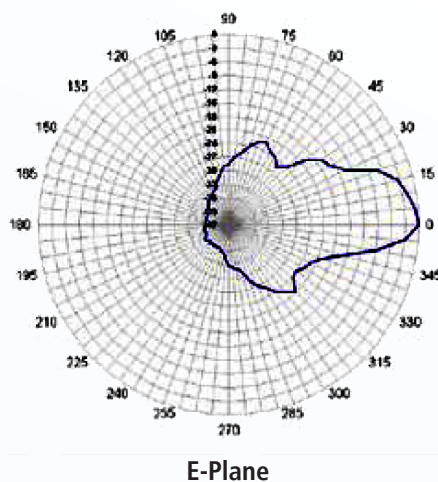

global solutions: local support™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com



Innovative **Technology**
for a **Connected** World

Echo Series® Directional Antenna

ES58-17

SPECIFICATIONS

PARAMETER	
Frequency range	5725-5850 MHz
Gain	17 dBi
Horizontal beamwidth	25°
Vertical beamwidth	25°
Front to back	30 dB
Input return loss (S11)	-14 dB
VSWR	1.5:1
Impedance	50 ohm
Input power	50 watts
Operating temperature	-40° to +70°C
Pole diameter (OD)	1 to 2 in (25 to 51 mm)
Weight	20 oz (467 g)
Dimension (diameter)	10 x 2.5 in (254 x 63 mm)
Bracket tilt	45°

SYSTEM ORDERING

ES58-17 5 GHz wideband 17 dBi echo series® directional antenna

NOTES

- All shipments F.O.B. Schaumburg, IL 60173

ANT-DS-ES58-17 0611

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2011 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.