

GaAs PIN photodiode with preamp G9287-14

ROSA type, 850 nm, 10 Gbps



Features

- $\phi 1.25$ mm sleeve type ROSA (Receiver Optical Sub-Assembly)
- High-speed response: 10 Gbps
- Low power supply voltage: 3.3 V
- Differential output
- Sensitivity: +2 to -14 dBm Typ. (Extinction ratio=4.5 dB)
- Trans-impedance: 6 k Ω Typ. *1

Applications

- 10 gigabit ethernet
- Optical fiber communications

■ Absolute maximum ratings (Ta=25 °C)

Parameter	Symbol	Value	Unit
Supply voltage	Vcc	-0.5, +4	V
Reverse voltage (photodiode)	VR	7	V
Operating temperature	Topr	-20 to +85	°C
Storage temperature	Tstg	-40 to +85	°C

■ Electrical and optical characteristics (Ta=25 °C, 850 nm, Vcc=3.3 $\pm$ 5 % V, Vpd=3.13 to 5.0 V, RL=50 Ω *2, unless otherwise noted)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Responsivity *3	R		0.4	0.55	-	A/W
Supply current	Icc	Dark state, RL= ∞	-	30	45	mA
Cut-off frequency	fc	-3 dB	6.5	7.0	-	GHz
Low cut-off frequency	fc-L	-3 dB	-	20	-	kHz
Noise equivalent power *1	NEP	Dark state, DC to 7.5 GHz	-	1.5	-	μ Wrms
Trans-impedance *1	Tz	RL=50 Ω , f=100 MHz	4.5	6	-	k Ω
Minimum receivable sensitivity *3	Pmin	10 Gbps, NRZ, PRBS=2 ³¹ -1, BER=10 ⁻¹²	Extinction ratio=4.5 dB	-	-14	-
			Extinction ratio=3 dB	-	-10	-
Minimum receivable sensitivity *3 (OMA)	Pmin (OMA)		Extinction ratio=3 dB	-	-12	-
Maximum receivable sensitivity	Pmax		Extinction ratio=10 dB	-	+2	-
Output amplitude	Vomax		350	450	550	mVpp
Dark current	ID	Dark state, RL= ∞	-	0.05	1	nA
Optical return loss *3	ORL		12	14	-	dB

*1: Single-ended (Vout+) measurement

*2: Capacitive coupling


*3: Measurement by 50/125 μ m GI MM fiber

■ Bit error rate

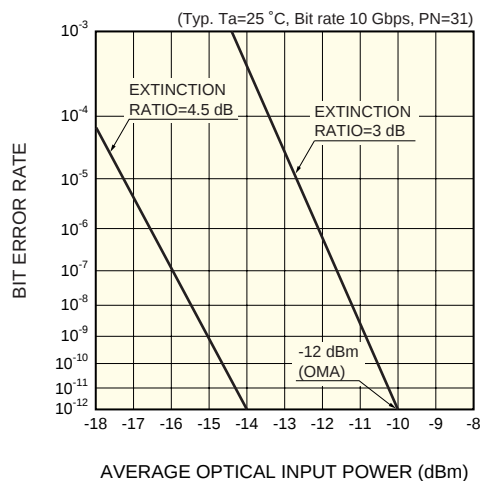

KGPD0058EC


■ Frequency response

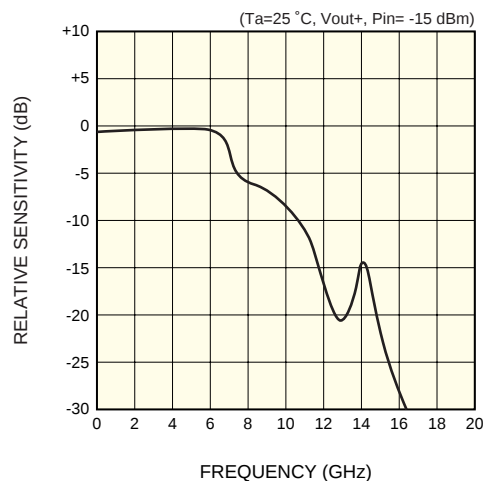

KGPD0064EA


■ Eye diagram

Bit rate 10 Gbps, $\text{PN}=31$, NRZ, $\lambda=850\text{ nm}$,
Extinction ratio 4.5 dB, $V_{cc}=V_{pd}=3.3\text{ V}$,
Responsivity=0.55 A/W

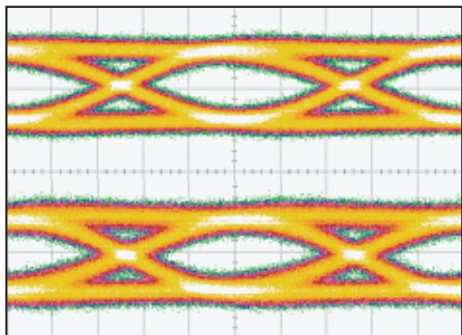

$\text{Pin}=-13\text{ dBm}$, 30 mV/div., 20 ps/div.

■ Dimensional outline (unit: mm)

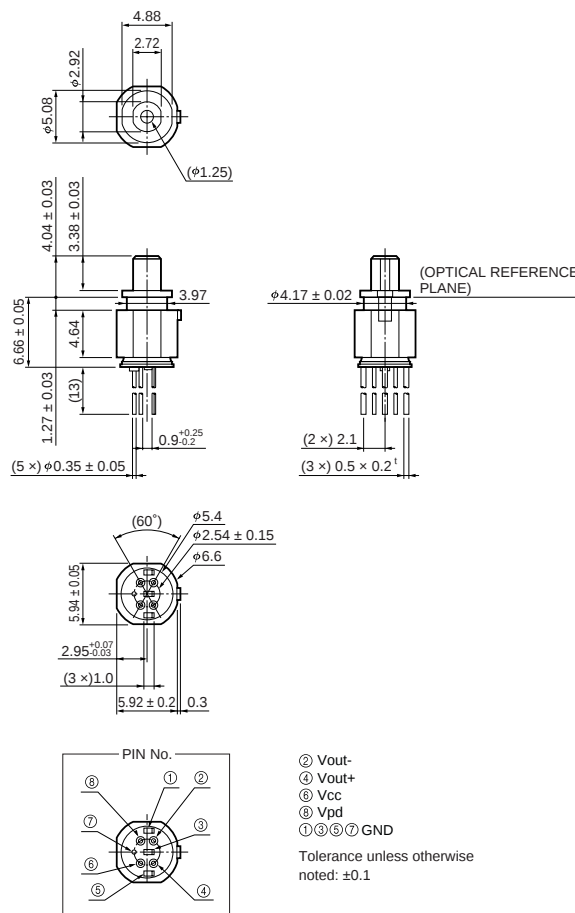

KIRDA0176EB

HAMAMATSU

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2005 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Cat.No. KGPD1012E03
Feb. 2005 DN