



DESCRIPTION

NX7101 is a 340kHz fixed frequency, current mode, PWM over-voltage protection which protects the synchronous buck (step-down) DC-DC converter, capable of driving a 2A load with high efficiency, excellent line and load regulation. The device integrates N-channel power MOSFET (OTP) to protect the circuit. switches with low on-resistance. Current mode control provides fast transient response and cycle-by-cycle current limit.

The controller is equipped with output Additional safety features include under voltage lock-out (UVLO), programmable soft-start and over-temperature protection

IC under a open load condition. Additional safety features include under voltage lock-out (UVLO), programmable soft-start and over-temperature protection

KEY FEATURES

- 2A Synchronous Step-down Regulator
- Operational Input Supply Voltage Range: 4.5V-18V
- Integrated Upper NMOS and Lower NMOS
- 340kHz Switching Frequency
- Input UVLO
- Enable
- Programmable External Soft-Start
- Cycle-By-Cycle Over-Current Protection
- Over Voltage Protection
- Frequency Fold Back Under Short Condition

APPLICATIONS

- Set-Top Box
- LCD TV's
- Notebook/Netbook
- PoE Powered Devices

PRODUCT HIGHLIGHT

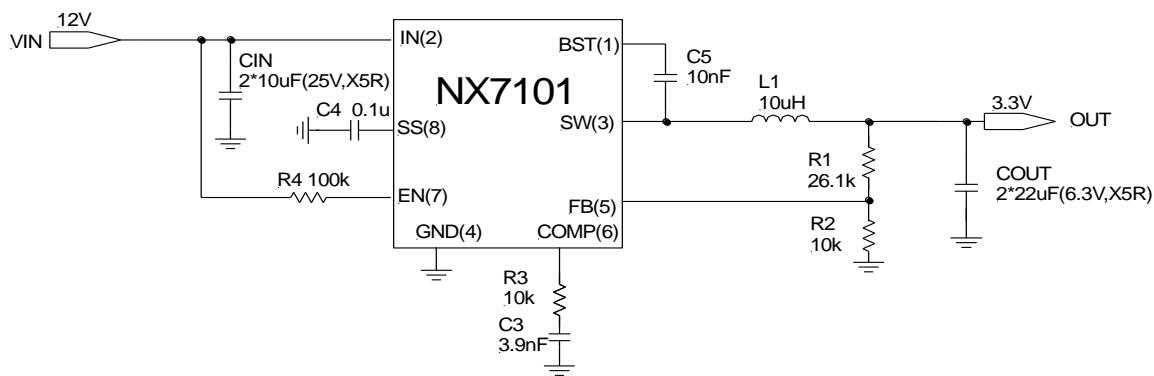


Figure 1 – NX7101 typical application

PACKAGE ORDER INFO

| | | |
|---------------------|----|---------------------------------------|
| T _A (°C) | DM | Plastic SOIC 8 Pin |
| -40 to 85 | | RoHS Compliant / Pb-free NX7101IDM |

Note: Available in Tape & Reel. Append the letters "TR" to the part number. (i.e. NX7101IDM-TR)




ABSOLUTE MAXIMUM RATINGS

| | |
|--|---------------------|
| Supply Input Voltage (VIN) | -0.3V to 20V |
| Switch Voltage (SW) | 21V |
| EN | -0.3V to VIN |
| BST | -0.3V to (VSW + 6V) |
| COMP, FB, SS | -0.3V to 6V |
| Maximum Operating Junction Temperature | 150°C |
| Storage Temperature Range | -65°C to 150°C |
| Package Peak Temp. for Solder Reflow (40 seconds maximum exposure) | 260°C |

Note: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground. Currents are positive into, negative out of specified terminal.

PACKAGE PIN OUT

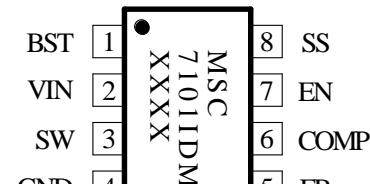

DM PACKAGE

(Top View)

DM PART MARKING

"XXXX" Denote Date Code and Lot Identification

RoHS / Pb-free 100% Matte Tin Pin Finish

THERMAL DATA

DM Plastic SOIC 8-Pin

THERMAL RESISTANCE-JUNCTION TO AMBIENT, θ_{JA}

105°C/W

Junction Temperature Calculation: $T_J = T_A + (P_D \times \theta_{JA})$.

The θ_{JA} numbers are guidelines for the thermal performance of the device/pc-board system. All of the above assume no ambient airflow.

FUNCTIONAL PIN DESCRIPTION

| Pin | Name | Description |
|-----|------|--|
| 1 | BST | Bootstrap pin. A minimum 10nF bootstrap capacitor is connected between the BS pin and SW pin. The voltage across the bootstrap capacitor drives the internal high side NMOS. |
| 2 | VIN | Supply input pin. A capacitor should be connected between the IN pin and GND pin to keep the input voltage constant. |
| 3 | SW | Power switch output pin. This pin is connected to the inductor and bootstrap capacitor. |
| 4 | GND | Ground. |
| 5 | FB | Feedback pin. This pin is connected to an external resistor divider to program the system output voltage. When the FB pin voltage exceeds 20% of the nominal regulation value of 0.925V, the over voltage protection is triggered. When the FB pin voltage is below 0.3V, the oscillator frequency is lowered to realize short circuit protection. |
| 6 | COMP | Compensation pin. This pin is the output of the transconductance error amplifier and the input to the current comparator. It is used to compensate the control loop. Connect a series RC network from this pin to GND. In some cases, an additional capacitor from this pin to GND pin is required. |
| 7 | EN | Control input pin. Forcing this pin above 2V enables the IC. Forcing this pin below 0.75V shuts down the IC. When the IC is in shutdown mode, all functions are disabled to decrease the supply current below 1 μ A. |
| 8 | SS | Soft-start control input pin. SS controls the soft start period. Connect a capacitor from SS to GND to set the soft-start period. A 0.1 μ F capacitor sets the soft-start period to 15ms. To disable the soft-start feature, leave SS unconnected. |



RECOMMENDED OPERATING CONDITIONS

| Parameter | Symbol | NX7101 | | | Units |
|-------------------------------|---------------------|--------|-----|-----|-------|
| | | Min | Typ | Max | |
| Input Operating Voltage | V _{IN} | 4.5 | | 18 | V |
| Maximum Output Current | I _{OUTMAX} | 2 | | | A |
| Operating Ambient Temperature | T _A | -40 | | 85 | °C |

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, the following specifications apply for V_{IN} = V_{EN} = 12V, V_{OUT} = 3.3V, T_A = 25°C.

| Parameter | Symbol | Test Conditions | NX7101 | | | Units |
|---|--------------------|---|--------|-------|-------|-------|
| | | | Min | Typ | Max | |
| Operating Current | | | | | | |
| Quiescent Current | I _Q | V _{FB} = 1V, V _{EN} = 3V | 0.86 | 1.25 | 1.4 | mA |
| Shutdown Current | I _{SHDN} | V _{EN} = 0V | | 0.1 | 10 | µA |
| UVLO | | | | | | |
| V _{IN} UVLO Threshold | V _{UVLO} | V _{IN} Rising | 3.65 | 4.0 | 4.25 | V |
| Hysteresis | V _{HYS} | | | 0.2 | | V |
| Feedback | | | | | | |
| Feedback Voltage | V _{FB} | T _A = -40°C to 85°C | 0.907 | 0.925 | 0.943 | V |
| Feedback Bias Current | I _{FB} | V _{FB} = 1V | -0.1 | | 0.1 | µA |
| Oscillator | | | | | | |
| Internal Oscillator Frequency | F _{OSC1} | | 280 | 340 | 400 | kHz |
| Short Circuit Oscillator Frequency | F _{OSC2} | | | 100 | | kHz |
| Maximum Duty Cycle | D _{MAX} | V _{FB} = 0.85V | | 90 | | % |
| Minimum Duty Cycle | D _{MIN} | V _{FB} = 1V | | | 0 | % |
| Error Amplifier | | | | | | |
| Error Amplifier Transconductance | G _{EA} | | | 800 | | µA/V |
| Voltage Gain ⁽¹⁾ | A _{EA} | | | 400 | | V/V |
| Current Sensing Gain | | | | | | |
| Current Sensing Gain | G _{CS} | | | 3.5 | | A/V |
| Soft-Start | | | | | | |
| Soft-start Current | | V _{SS} = 0V | | 6 | | µA |
| Soft-start Time ⁽¹⁾ | T _{SS} | C _{SS} = 0.1µF | | 15 | | ms |
| Output Stage | | | | | | |
| High-side Switch On Resistance | R _{DSONH} | I _{SW} = 0.2A/ 0.7A | 85 | 115 | 145 | mΩ |
| Low-side Switch On Resistance | R _{DSONL} | I _{SW} = -0.2A/ -0.7A | 75 | 105 | 135 | mΩ |
| High-side Switch Leakage Current | I _{LEAKH} | V _{IN} = 18V, V _{EN} = 0V, V _{SW} = 0V | | 0.1 | 10 | uA |
| High-side Switch Current Limit | I _{LIMH} | | 2.7 | 3.5 | | A |
| Low-side Switch Current Limit | I _{LIML} | From Drain to Source | | 1.4 | | A |
| EN | | | | | | |
| EN Shutdown Threshold Voltage | V _{EN} | | 1.1 | 1.5 | 2 | V |
| EN Shutdown Threshold Voltage Hysteresis ⁽¹⁾ | V _{ENH} | | | 350 | | mV |
| EN Lockout Threshold Voltage | | | 2.2 | 2.5 | 2.7 | V |
| EN Lockout Hysteresis | | | | 210 | | mV |



ELECTRICAL CHARACTERISTICS (CONT)

Unless otherwise specified, the following specifications apply for $V_{IN} = V_{EN} = 12V$, $V_{OUT} = 5V$, $T_A = 25^\circ C$.

| Parameter | Symbol | Test Conditions | NX7101 | | | Units |
|-----------------------------------|------------|-----------------|--------|-----|------|------------|
| | | | Min | Typ | Max | |
| Protection | | | | | | |
| Over Voltage Protection Threshold | V_{FBOV} | | | 1.1 | | V |
| FB Short Circuit Protection | | | 0.23 | 0.3 | 0.41 | V |
| Thermal Shutdown Threshold | T_{OTSD} | | | 160 | | $^\circ C$ |
| Thermal Shutdown Hysteresis | T_{HYS} | | | 30 | | $^\circ C$ |

Notes:

- Guaranteed by design, not tested.

SIMPLIFIED BLOCK DIAGRAM

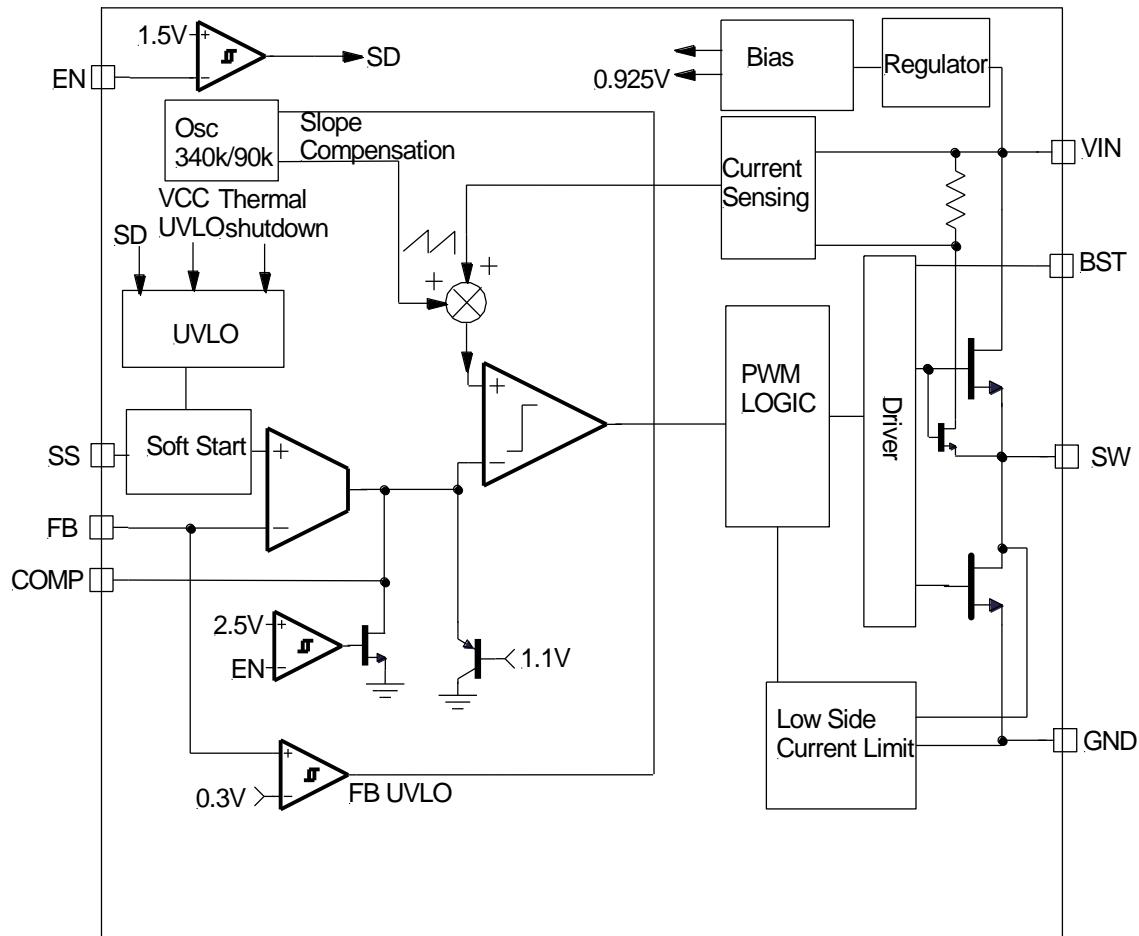


Figure 2 – Simplified Block Diagram



APPLICATION CIRCUIT

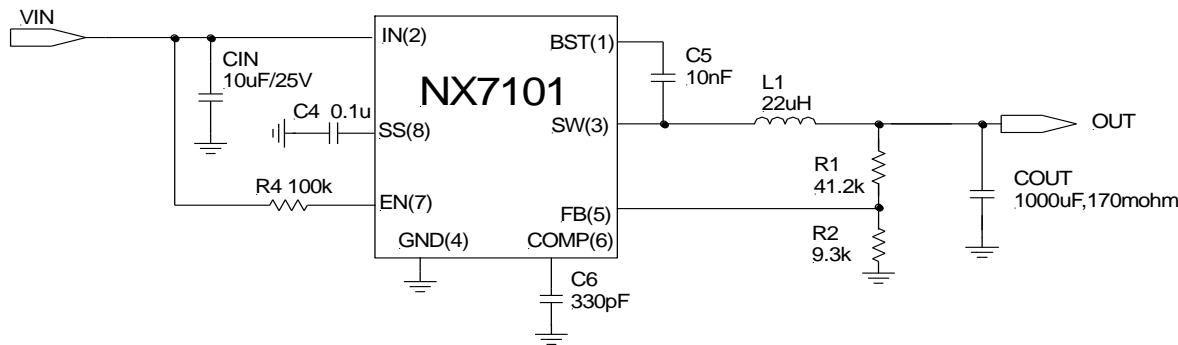


Figure 3 – 12V Input, 5V Output with Electrolytic Cap

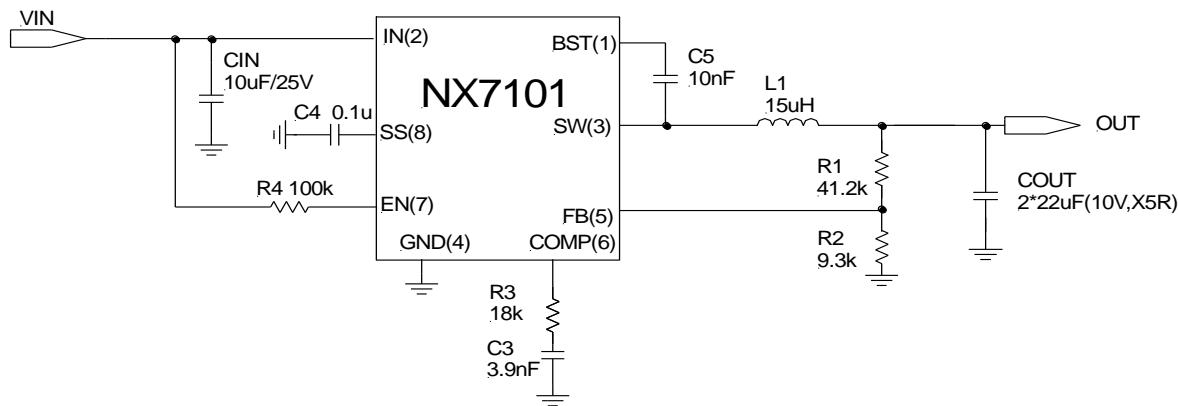


Figure 4 – 12V Input, 5V Output with Ceramic Cap



TYPICAL WAVEFORMS @ 25°C (REFER TO FIGURE 1)

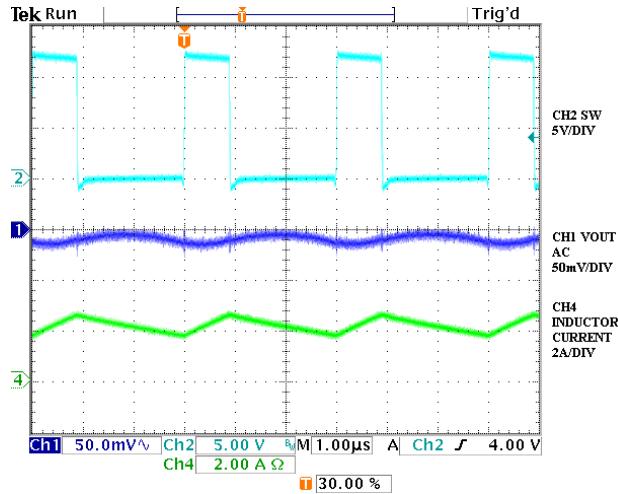


Figure 5. DC Operation at 2A

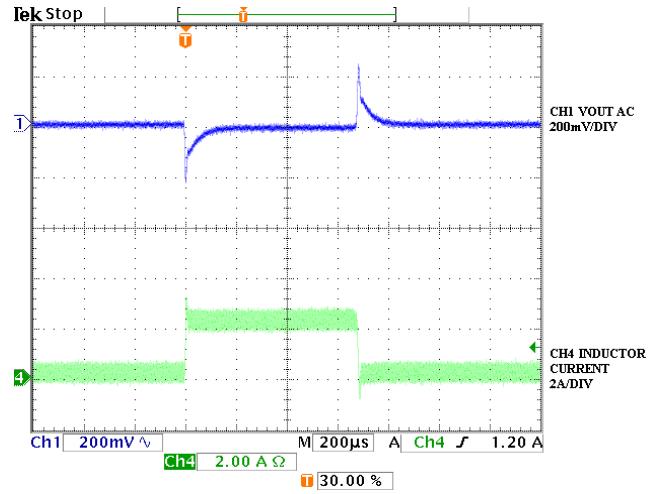


Figure 6. Transient Response

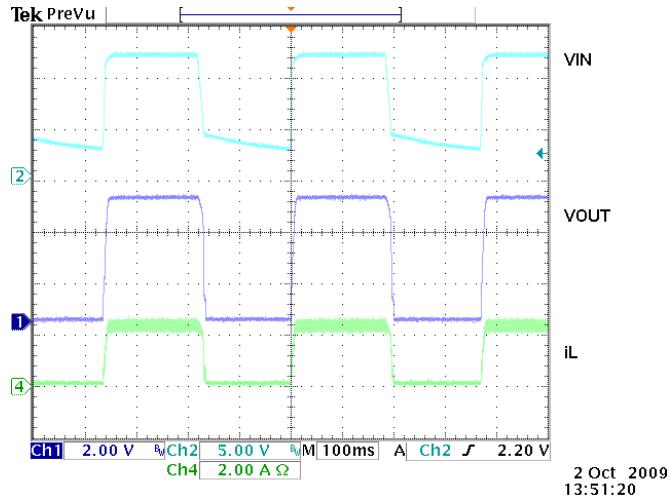


Figure 7. Input power recycling

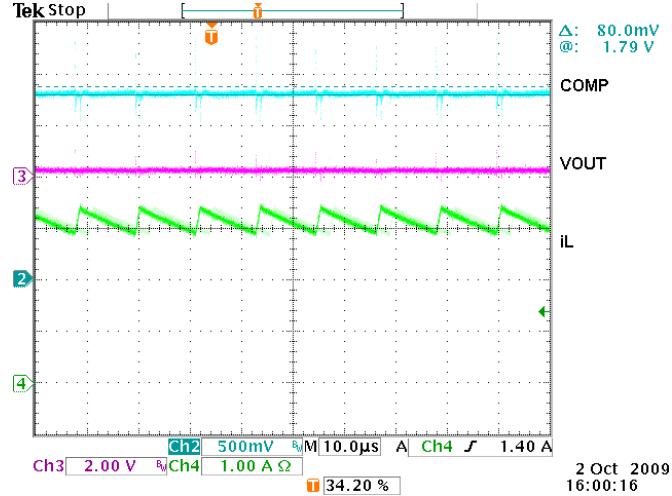


Figure 8. Output short operation



TYPICAL WAVEFORMS @ 25°C (REFER TO FIGURE 3)

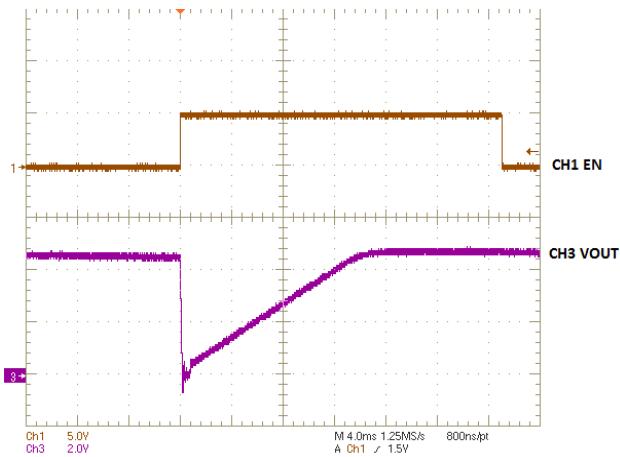


Figure 9. EN and soft start

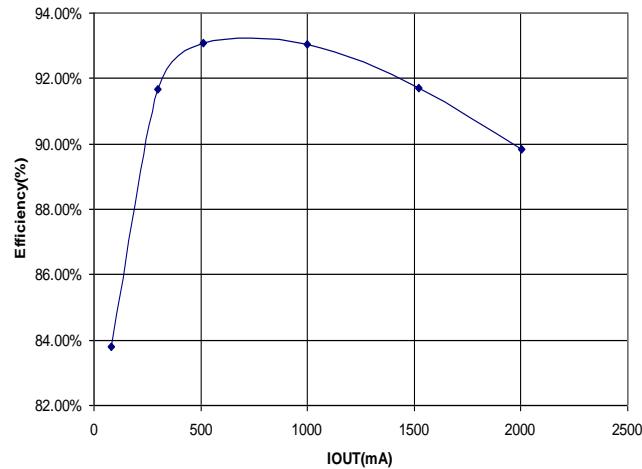


Figure 10. Efficiency vs. IOUT(VIN=12V, VOUT=5V)



THEORY OF OPERATION

DETAIL DESCRIPTION

The NX7101 is a current-mode, PWM synchronous step-down DC-DC converter with 340kHz fixed working frequency. It can convert input voltages from 4.75V to 18V down to an output voltage as low as 0.925V, and supply up to 2A load current.

The NX7101 has two internal N-MOSFETs to step down the voltage. The inductor current is determined by sensing the internal high-side MOSFET current. The output of current sense amplifier is summed with the slope compensation signal to avoid subharmonic oscillation at duty cycles greater than 50%. The combined signal is then compared with the error amplifier output to generate the PWM signal.

Current mode control provides not only fast control loop response but also cycle-by-cycle current limit protection. When load current reaches its maximum output level when the inductor peak current triggers the high-side NMOSFET current limit. If FB pin voltage drops below 0.3V, the working frequency will be fold back to protect chip from run-away.

When FB pin voltage exceeds 1.1V, the over voltage protection is triggered. The high side MOSFET is turned off. Once the OVP condition is gone, the chip will resume the operation following soft-start.



APPLICATION INFORMATION

SYMBOL USED IN APPLICATION INFORMATION:

| | |
|---------------------|---------------------------|
| V_{IN} | - Input voltage |
| V_{OUT} | - Output voltage |
| I_{OUT} | - Output current |
| ΔV_{RIPPLE} | - Output voltage ripple |
| F_S | - Working frequency |
| ΔI_{RIPPLE} | - Inductor current ripple |

DESIGN EXAMPLE

The following is typical application for NX7101, the schematic is figure 1.

$V_{IN} = 12V$

$V_{OUT} = 3.3V$

$I_{OUT} = 2A$

OUTPUT INDUCTOR SELECTION

The selection of inductor value is based on inductor ripple current, power rating, working frequency and efficiency. A larger inductor value normally means smaller ripple current. However if the inductance is chosen too large, it results in slow response and lower efficiency. Usually the ripple current ranges from 20% to 40% of the output current. This is a design freedom which can be determined by the design engineer according to various application requirements. The inductor value can be calculated by using the following equations:

$$L_{OUT} = \frac{V_{IN} - V_{OUT}}{\Delta I_{RIPPLE}} \times \frac{V_{OUT}}{V_{IN}} \times \frac{1}{F_S}$$

$$I_{RIPPLE} = k \times I_{OUTPUT} \quad \dots (1)$$

where k is between 0.2 to 0.4.

In this design, k is set at 0.35 and $10\mu H$ inductor value is chosen. In order to avoid output oscillation at light load, a minimum $8.2\mu H$ inductor is required for all NX7101 application.

OUTPUT CAPACITOR SELECTION

Output capacitor is basically decided by the amount of the output voltage ripple allowed during steady state (DC) load condition as well as specification for the load transient. The optimum design may require a couple of iterations to satisfy both conditions.

The amount of voltage ripple during the DC load condition is determined by equation (2).

$$\Delta V_{RIPPLE} = ESR \times \Delta I_{RIPPLE} + \frac{\Delta I_{RIPPLE}}{8 \times F_S \times C_{OUT}} \quad \dots (2)$$

Where ESR is the output capacitor's equivalent series resistance, C_{OUT} is the value of output capacitor.

Typically when large value capacitors are selected such as Aluminum Electrolytic, POSCAP and OSCON types are used, the amount of the output voltage ripple is dominated by the first term in equation(2) and the second term can be neglected.

If ceramic capacitors are chosen as output capacitors, both terms in equation (2) need to be evaluated to determine the overall ripple. Usually when this type of capacitor is selected, the amount of capacitance per single unit is not sufficient to meet the transient specification, which results in the need for parallel configuration of multiple capacitors.

In this design two $22\mu F$ 6.3V X5R ceramic capacitors are chosen as output capacitors.

INPUT CAPACITOR SELECTION

Input capacitors are usually a mix of high frequency ceramic capacitors and bulk capacitors. Ceramic capacitors bypass the high frequency noise, and bulk capacitors supply current to the MOSFETs. Usually $1\mu F$ ceramic capacitor is chosen to decouple the high frequency noise. The bulk input capacitors are determined by the voltage rating and RMS current rating. The RMS current in the input capacitors can be calculated as:

$$I_{RMS} = I_{OUT} \times \sqrt{D} \times \sqrt{1-D}$$

$$D = \frac{V_{OUT}}{V_{IN}} \quad \dots (3)$$

In this design two $10\mu F$ 25V X5R ceramic capacitors are chosen.

OUTPUT VOLTAGE CALCULATION

Output voltage is set by reference voltage and external voltage divider. The reference voltage is fixed at 0.925V. The divider consists of two ratioed resistors so that the output voltage applied at the FB pin is 0.925V when the output voltage is at the desired value. The following equation and picture show the relationship between and voltage divider.



APPLICATION INFORMATION

$$V_{\text{OUT}} = V_{\text{REF}} \times \left(1 + \frac{R_1}{R_2}\right) \quad \dots (4)$$

In this design R1 is 26.1kΩ, R2 is 10kΩ.

COMPENSATOR DESIGN

The NX7101 uses peak current mode control to provide fast transient and simple compensation. The DC gain of close loop can be estimated by the equation (5).

$$\text{Gain} = A_{\text{EA}} \times G_{\text{CS}} \times R_{\text{LOAD}} \times \frac{V_{\text{FB}}}{V_{\text{OUT}}} \quad \dots (5)$$

Where A_{EA} is error amplifier voltage gain 560V/V, G_{CS} is current sensing gain 3.5A/V, R_{LOAD} is the load resistor.

The system itself has one pole P_1 , one zero Z_1 and double pole P_{DOUBLE} at half of switching frequency F_S .

The system pole P_1 is set by output capacitor and output load resistor. The calculation of this pole is given by the equation (6).

$$F_{P_1} = \frac{1}{2 \times \pi \times R_L \times C_{\text{OUT}}} \quad \dots (6)$$

The system zero Z_1 is set by output capacitor and ESR of output capacitor. The calculation of this zero is given by the equation (7).

$$F_{Z_1} = \frac{1}{2 \times \pi \times R_{\text{ESR}} \times C_{\text{OUT}}} \quad \dots (7)$$

The crossover frequency is recommended to be set at 1/10th of switching frequency. In order to achieve this desired crossover frequency and make system stable, the resistor R_3 and the capacitor C_3 is needed in typical applications which use ceramic capacitors as output capacitors.

The pole P_2 set by output resistance of error amplifier and C_3 is given by the equation (8).

$$F_{P_2} = \frac{G_{\text{EA}}}{2 \times \pi \times A_{\text{EA}} \times C_3} \quad \dots (8)$$

Where G_{EA} is error amplifier transconductance 800uA/V.

The zero Z_2 set by R_3 and C_3 is given by the equation (9).

$$F_{Z_2} = \frac{1}{2 \times \pi \times R_3 \times C_3} \quad \dots (9)$$

When Aluminum Electrolytic capacitors are chosen as output capacitors, the ESR zero is much lower and extra capacitor C_6 from COMP pin to ground is needed to stabilize the system.

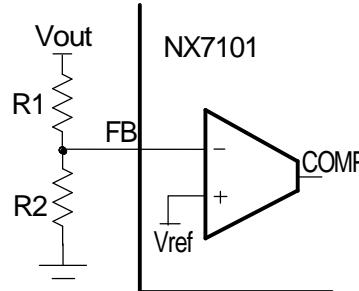


Figure 11 Voltage Divider

The pole P_3 set by R_3 and C_6 is given by the equation (10).

$$F_{P_3} = \frac{1}{2 \times \pi \times R_3 \times C_6} \quad \dots (10)$$

The compensation values for typical output voltage application are given in the table below.

| V _{OUT} | L | C _{OUT} | R ₃ | C ₃ | C ₆ |
|------------------|-------------|-----------------------|----------------|----------------|----------------|
| 1.8V | 10μH | 22μFx2 | 6k | 3.9nF | None |
| 2.5V | 10μH | 22μFx2 | 8k | 3.9nF | None |
| 3.3V | 10μH | 22μFx2 | 10k | 3.9nF | None |
| 5V | 15μH | 22μFx2 | 18k | 3.9nF | None |
| 2.5V | 10μH | 470μF AL. 30mΩ ESR | 85k | 250pF | 150pF |
| 5V | 15- 22μH | 470μF AL. 30mΩ ESR | 150k | 220nF | 82pF |



Microsemi

NX7101
2A, High Voltage Synchronous Buck Regulator


PRODUCTION DATA SHEET

www.Microsemi.com

NX7101

PACKAGE DIMENSIONS

DM Plastic SOIC 8 Pin

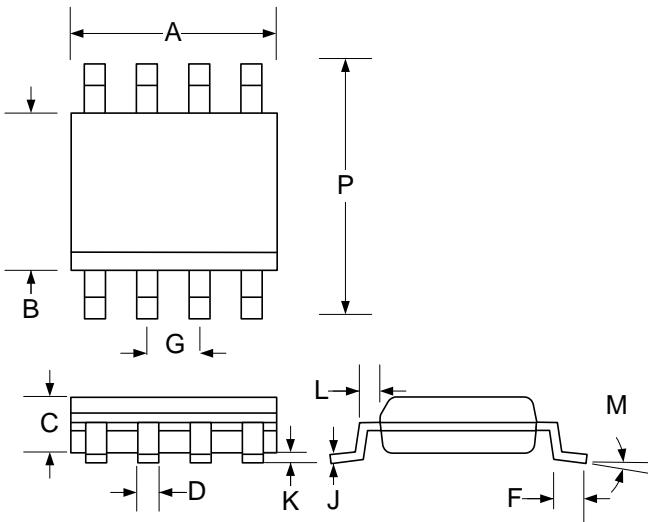

| IM | MILLIMETERS | | INCHES | |
|----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 4.700 | 5.100 | 0.185 | 0.201 |
| B | 3.800 | 4.000 | 0.150 | 0.157 |
| G | 1.270 BSC | | 0.050 BSC | |
| P | 5.800 | 6.200 | 0.228 | 0.244 |
| C | 1.350 | 1.750 | 0.053 | 0.069 |
| D | 0.330 | 0.510 | 0.013 | 0.020 |
| K | 0.100 | 0.300 | 0.004 | 0.012 |
| L | 0.320 BSC | | 0.013 BSC | |
| J | 0.190 | 0.250 | 0.007 | 0.010 |
| F | 0.450 | 0.800 | 0.017 | 0.031 |
| M | - | 8° | - | 8° |



Microsemi®

NX7101
2A, High Voltage Synchronous Buck Regulator

PRODUCTION DATA SHEET

NOTES

PRODUCTION DATA – Information contained in this document is proprietary to Microsemi and is current as of publication date. This document may not be modified in any way without the express written consent of Microsemi. Product processing does not necessarily include testing of all parameters. Microsemi reserves the right to change the configuration and performance of the product and to discontinue product at any time.

NX7101

www.Microsemi.com