
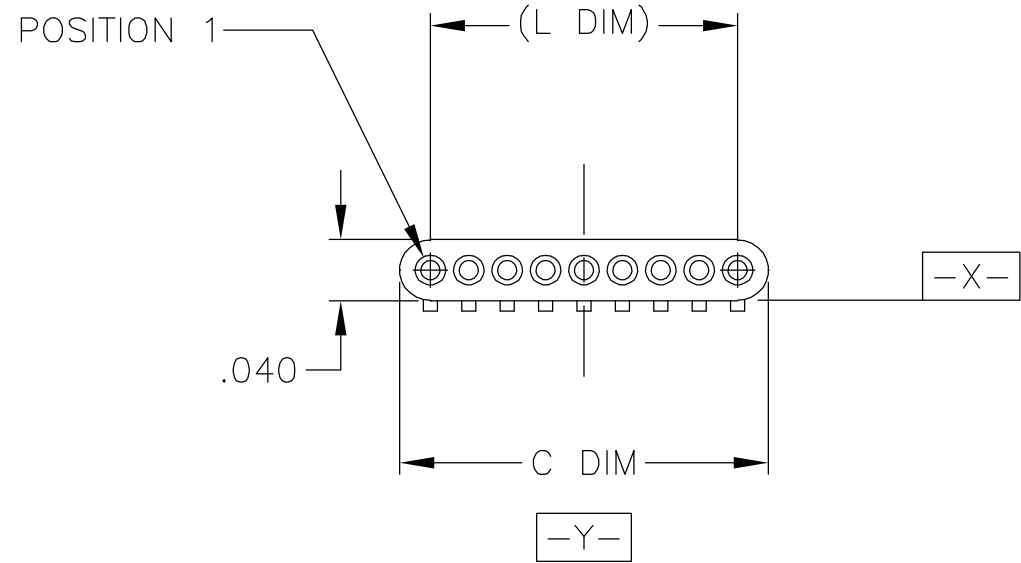
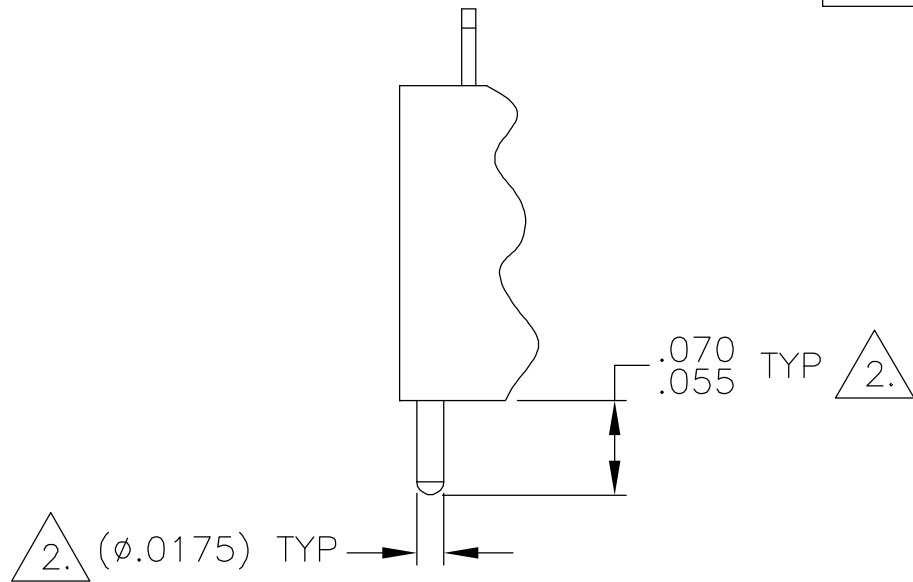
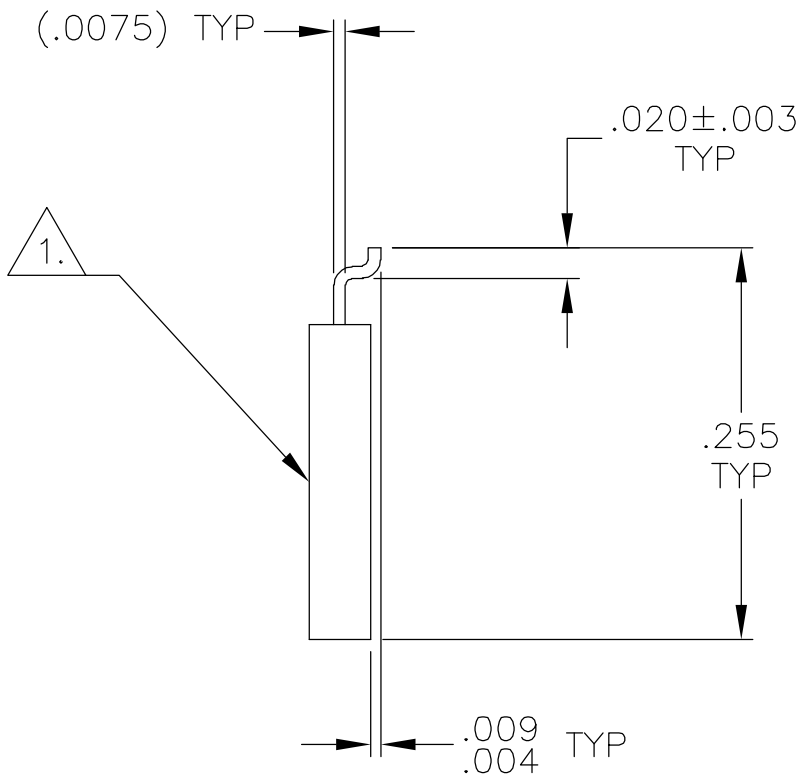


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
DF	D0		B	UPDATE PER 0H2Y-0026-04		01-23-04	JDM

SIZE	A DIM	C DIM	(L DIM)
04	.0375	.115	(.075)
09	.100	.240	(.200)
15	.175	.390	(.350)

5.	25	.300	.640	(.600)
5.	37	.450	.940	(.900)
5.	51	.625	1.290	(1.250)

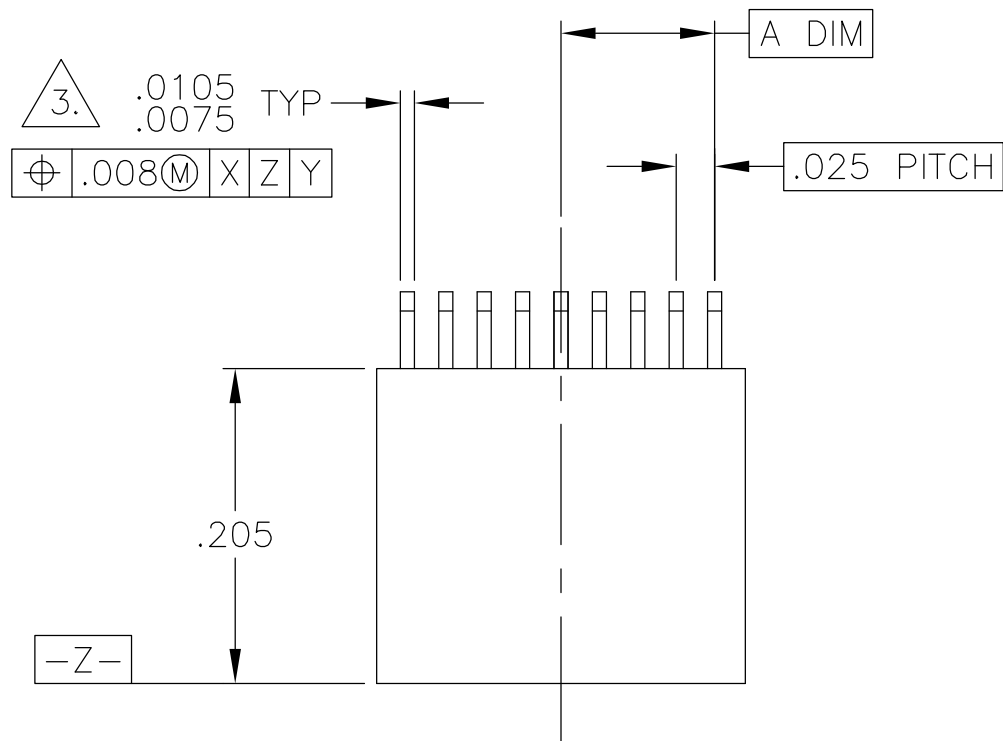

- T POSITION 1
- U POSITION 2
- V POSITION 3
- W POSITION 1, AND SECOND TO LAST POSITION
- Y POSITION 1, AND THIRD TO LAST POSITION
- Z POSITION 2, AND THIRD TO LAST POSITION

- $\triangle 1.$ INSULATOR MATERIAL: RYTON (POLYPHENYLENE SULFIDE) PER MIL-M-24519 OR LCP PER ASTM D5138
- $\triangle 2.$ OPTIONAL POLARIZATION GUIDE POST SHOWN FOR REFERENCE ONLY. IF GUIDE POST(S) ARE REQUIRED, THE LOCATION MUST BE SPECIFIED IN THE NANONICS PART NUMBER. GUIDE POST MATERIAL IS 303 STAINLESS STEEL, PASSIVATED PER SAE-AMS-QQ-P-35.
- $\triangle 3.$ SMT LEADS ARE BeCu, GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER SAE-AMS-QQ-N-290
4. TERMINATION CODE: H2
- $\triangle 5.$ WHEN ORDERING THESE SIZES, FIRST CONSULT TYCO ELECTRONICS/NANONICS FOR ADDITIONAL INFORMATION.
6. THIS DRAWING PREVIOUSLY IDENTIFIED AS NANONICS N10138/040

- $\triangle 2.$ POLARIZING GUIDE POST "PGP" POSITIONS, SEE DETAIL A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. SCHOLL	08-06-03	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105							
DIMENSIONS: INCHES		CHK M. STORRY	08-06-03	NAME PLUG ASSEMBLY, UNSHROUDED STRIP, HORIZONTAL SMT, GOLD PLATED LEADS, PLASTIC							
		APVD D. MORALES	01-27-04								
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC							
		1 PLC ± -		—							
		1 PLC ± -		—							
		2 PLC ± .010		—							
		3 PLC ± .005		APPLICATION SPEC							
		4 PLC ± -		—							
		ANGLES ± 1°		—							
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
SEE NOTES		SEE NOTES		WEIGHT	A2	00779	C=1589811	—			
CUSTOMER DRAWING				SCALE	8:1	SHEET	1	OF	2	REV	B

