

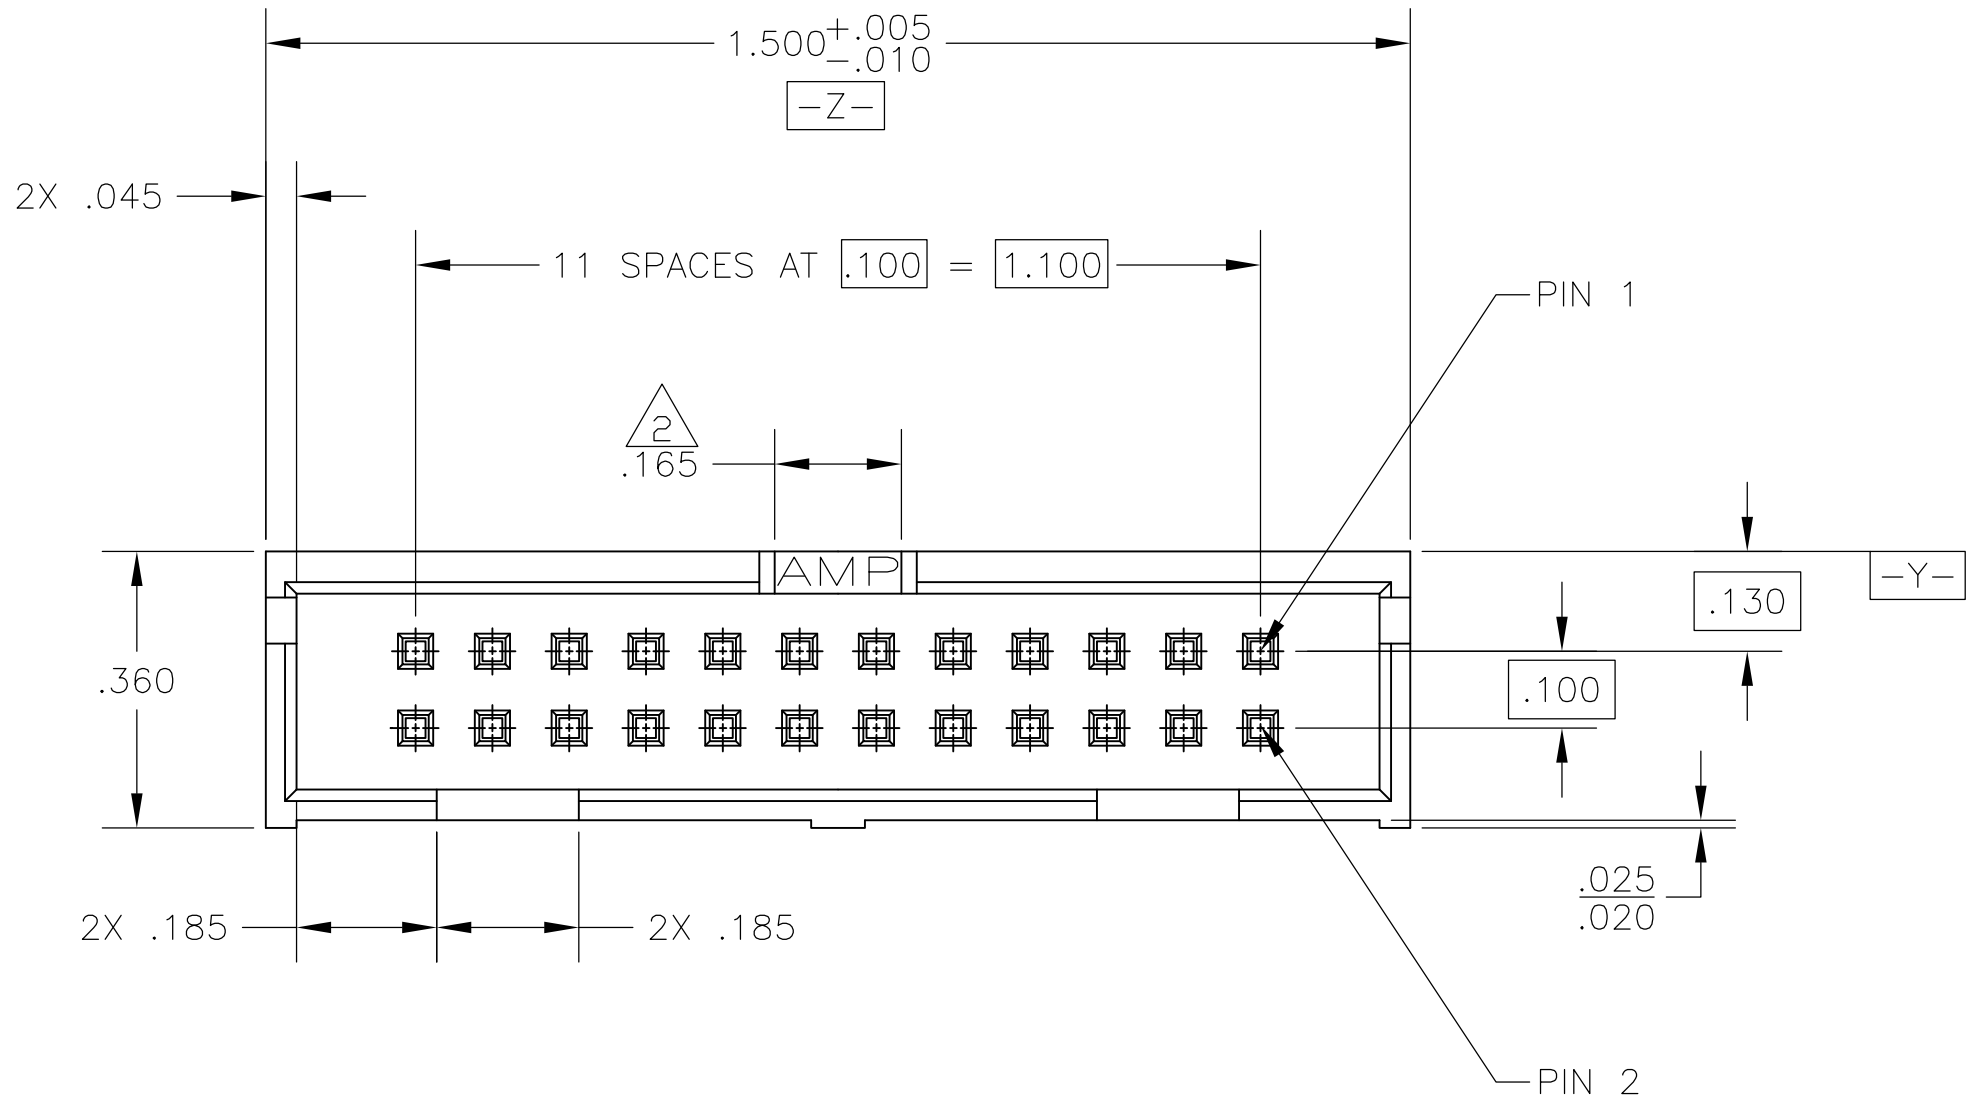
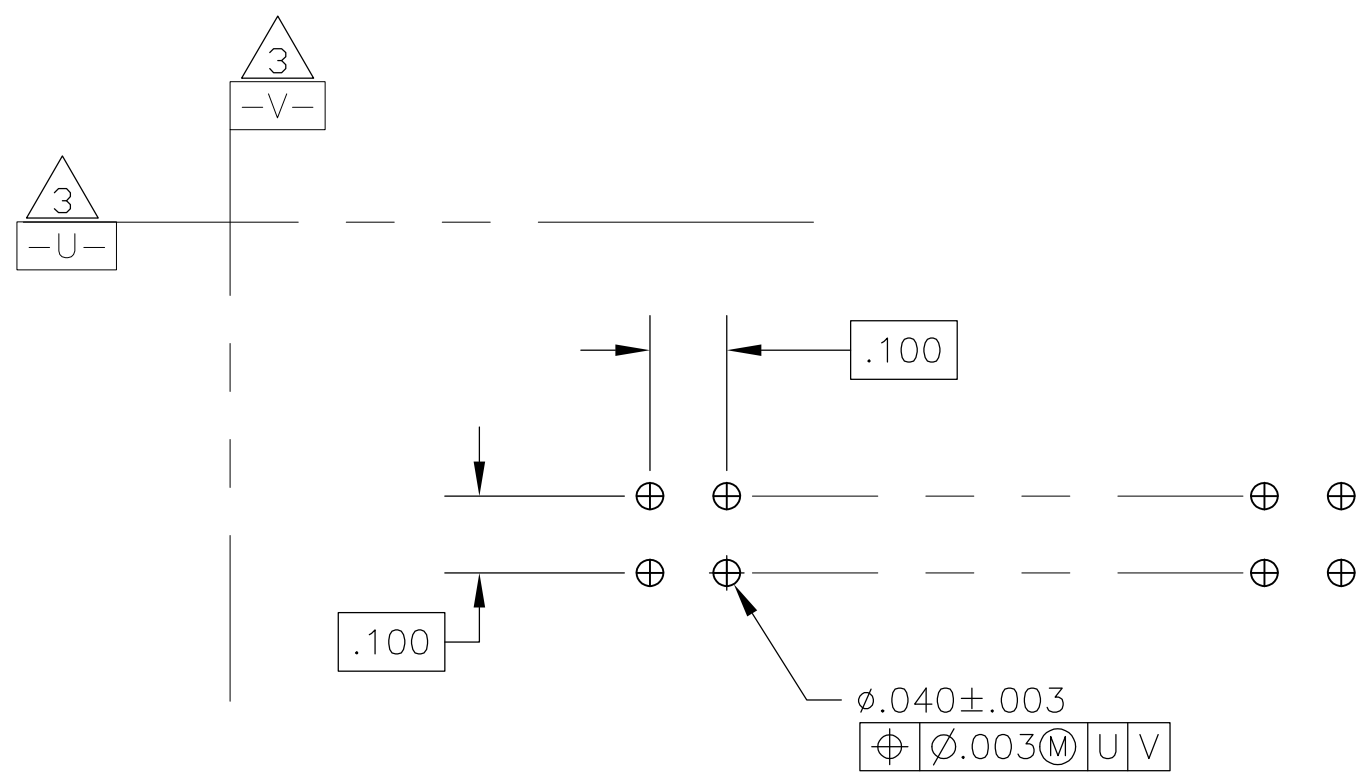


LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
			E	REVISED PER ECO-11-003735				16MAR2011	CJV SLB

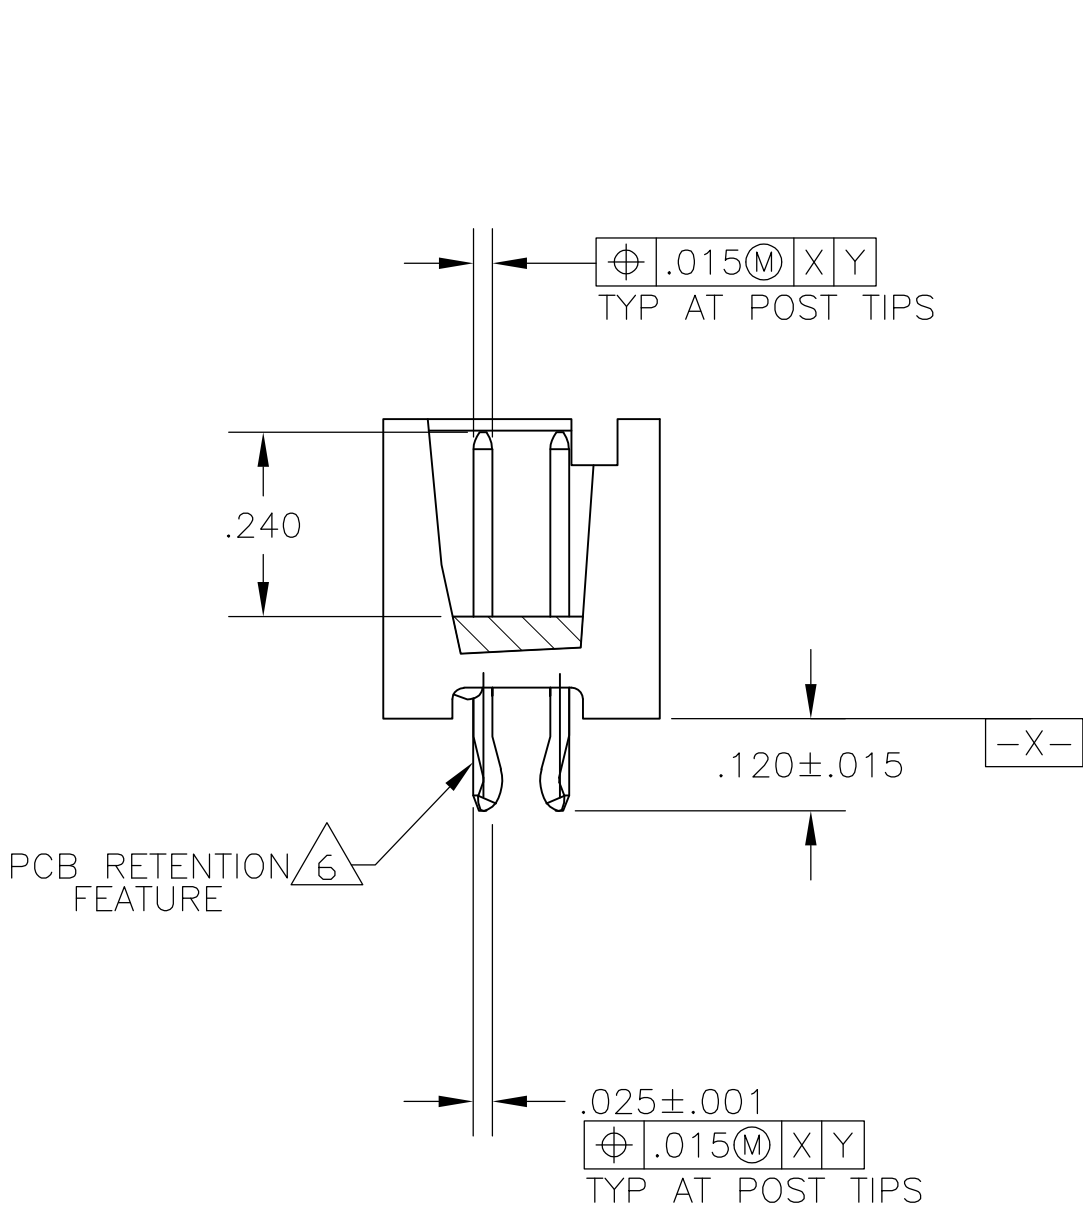

- 1 DOUBLE BAR POLARIZATION SLOTS.
- 2 CENTER POLARIZATION SLOT.
- 3 DATUMS U AND V TO BE ESTABLISHED BY THE CUSTOMER.
- 4 HOUSING: GLASS FILLED PPA, UL 94V-0, COLOR: BLACK. POSTS: BRASS.
- 5 POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, .000015 MIN TOTAL ON THE MATING SURFACES, .000100 MIN TIN PLATE ON THE SOLDER-TAILS, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
-OR-
.000015 MIN GOLD PLATE ON THE MATING SURFACES, .000100 MIN TIN PLATE ON THE SOLDER-TAILS, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- 6 THE RETENTION FREATURE ON THE SOLDER-TAILS WAS DESIGNED FOR A PCB THICKNESS OF .062±.007. THIS FEATURE APPLIES ONLY TO THE SOLDER-TAILS LOCATED ON THE END POSITIONS THE CONNECTOR (4 PLACES).
- 7. PACKAGED IN SINGLE TUBES.

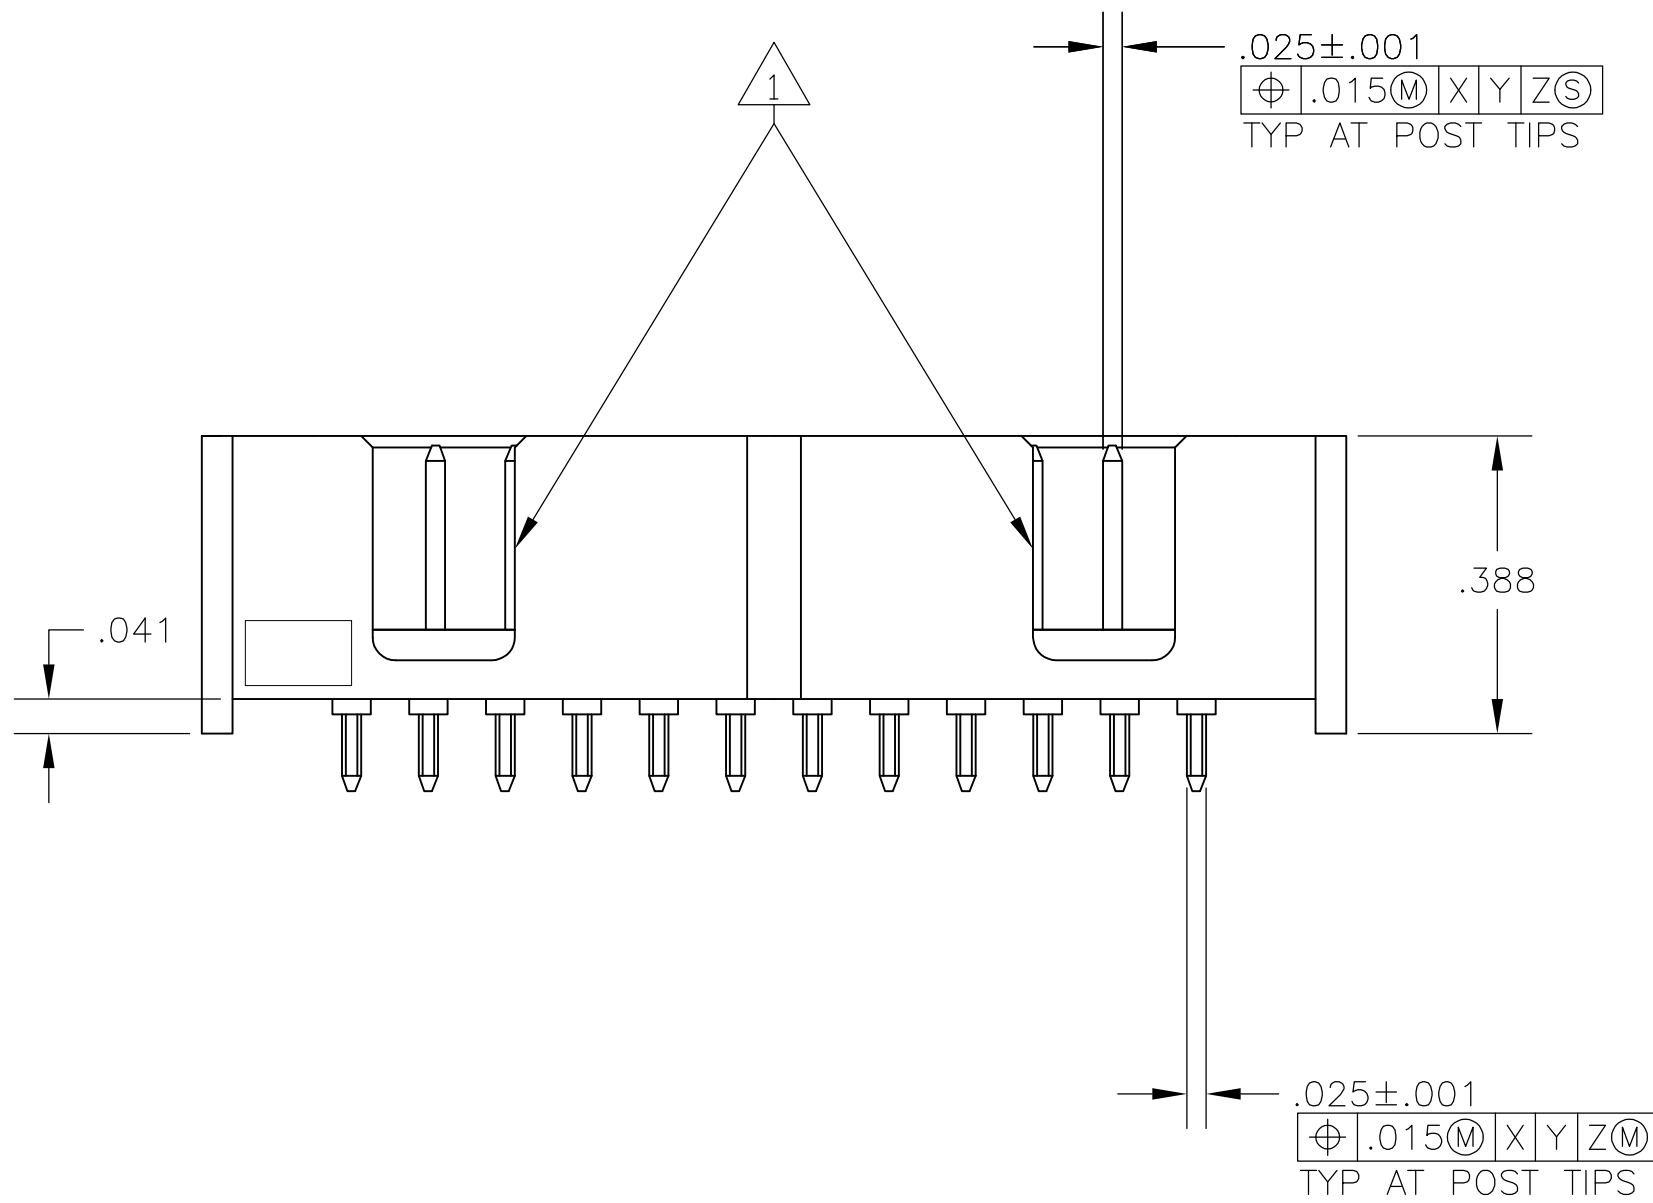

24	1888208-5
NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. LAUBACH 19 DEC 05	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
		CHK J. GERACE 19 DEC 05		
DIMENSIONS: INCHES		APVD M. WALMSLEY 19 DEC 05	NAME	
		PRODUCT SPEC	108-40018	
		APPLICATION SPEC		
		—		
MATERIAL 4		FINISH 5	WEIGHT —	RESTRICTED TO —
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1	REV E