

NOTES, UNLESS OTHERWISE SPECIFIED:

TOOL WEIGHT: 1.70 lbs./ 0.77 Kg

ALL DIMENSIONS IN METRIC (mm)
[] DIMENSIONS IN INCHES


**HANDLES TO SPRING RETURN FREELY
TO OPEN POSITION AFTER CRIMPING**

**TOOL FRAME MEMBERS AND FASTENERS
TO INCORPORATE BLACK OXIDE FINISH**

RECOMMENDED LUBE FOR FRAME LINKAGE:

MOLYKOTE BR2 PLUS
(SUPPLIER, DOW CORNING)

AWG, mm2 LETTERING AND ALL GUAGE MARKINGS TO BE OF EQUAL SIZE OF 2.54[0.1] HEIGHT

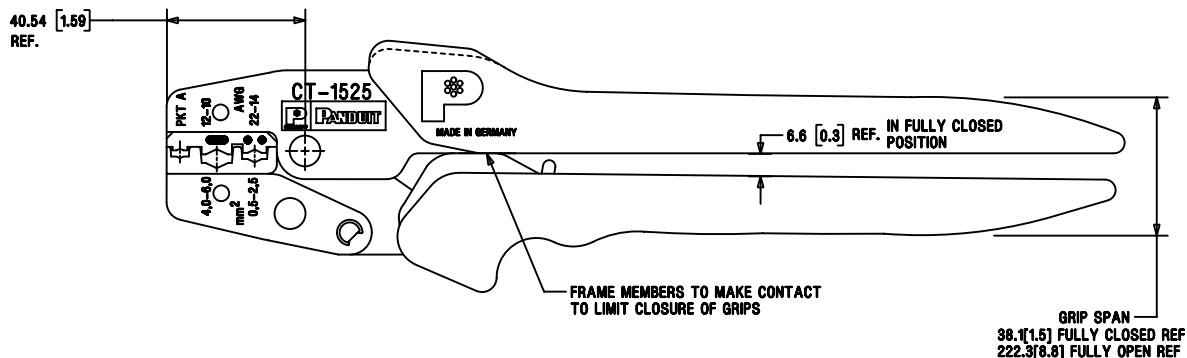

										PANDUIT CORP TINLEY PARK, ILL. IND.	
										CD*CT-1525	
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: F.X. .003 F.X. .001	
										UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, ZERO AND FRACTIONS	
										DRAWN BY REC	
										MAT'L'S	
										SEE NOTES	
										SCALE 1:1	
										DRAWING NO. TP23624C01	
										REV. C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[CT-1525](#)