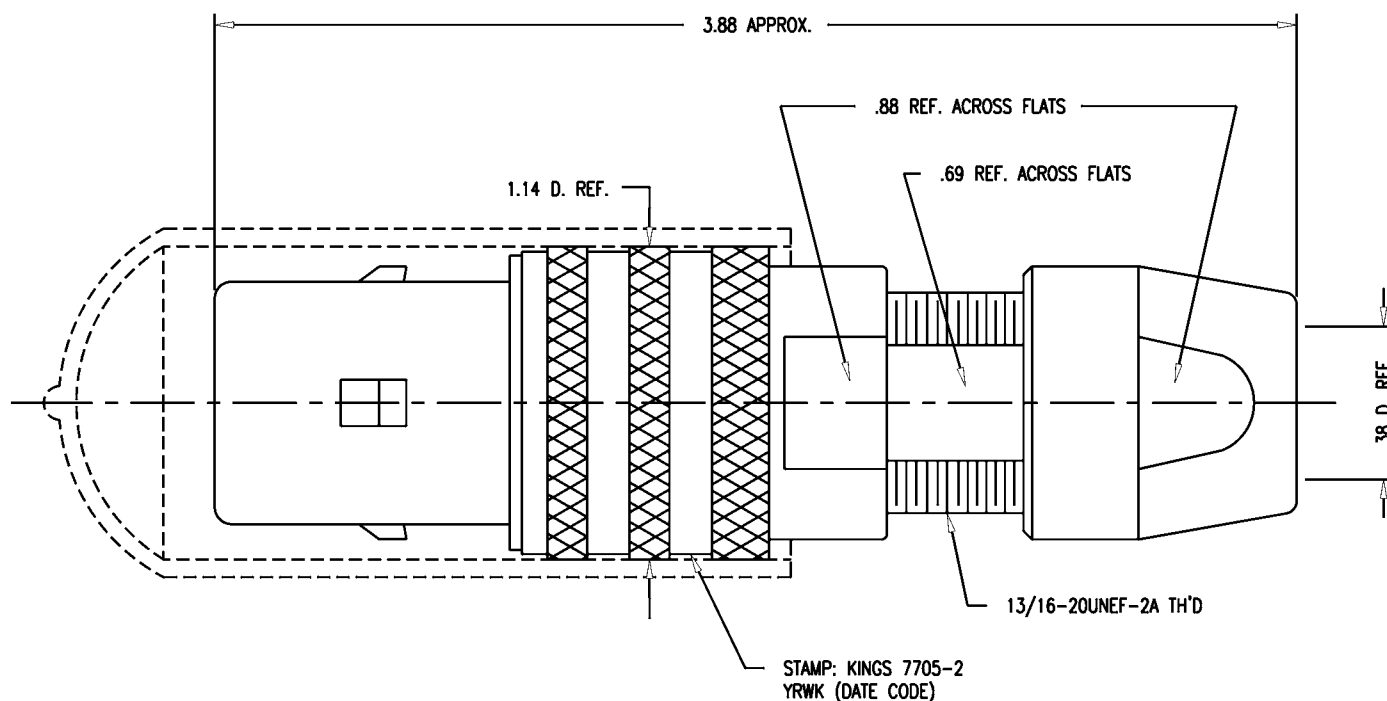


GSD

1. FOR USE WITH 730 CABLE GROUP.
2. FOR CABLING INSTRUCTIONS SEE KAI-8010.
3. FOR CABLE TRIMMING USE KIJ-303 AND KTD-303.
4. FOR CRIMPING USE DIE KTH-1000 AND KTH-2002.
5. MATERIALS:
 - INSULATORS: TEFLON, ASTM-D-4894
 - CONDUCTIVE GASKET: CONSIL C 87-10004
 - GASKETS: SILICONE RUBBER, ZZ-R-765
 - K-GRIP SLEEVE: COM. BRONZE TUBE, ASTM-B-135
 - OUTER CONTACT: PHOSPHOR BRONZE, ASTM-B-103
 - FINGER BODY: BER. COPPER, ASTM-B-196
 - CENTER CONTACT TIP: DELRIN
 - CAP: VINYL
 - ALL OTHER METAL PARTS: BRASS, ASTM-B16

CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
 NUT
 COLLET } KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
 OUTER BODIES }
 ALL OTHER METAL PARTS: SILVER PLATE, PER QQ-S-365
 ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 75 OHMS
 FREQUENCY RANGE: DC-500 MHZ
 VOLTAGE BREAKDOWN: CENTER CONDUCTOR/INNER GROUND: 1500 VRMS
 INNER GROUND/OUTER GROUND: 500 VRMS

ISSUE	CHANGES
0	ER 35415 KH 05/06/95
1	CN 37763 C HVN 01/19/99
2	CN 38123 C BDH 11/08/00

7705-2

KAM5502

SCALE 2:1

APPROX SURFACE AREA
100
200
300
400
500
600
700
800
900
1000
1100
1200
1300
1400
1500
1600
1700
1800
1900
2000
2100
2200
2300
2400
2500
2600
2700
2800
2900
3000
3100
3200
3300
3400
3500
3600
3700
3800
3900
4000
4100
4200
4300
4400
4500
4600
4700
4800
4900
5000
5100
5200
5300
5400
5500
5600
5700
5800
5900
6000
6100
6200
6300
6400
6500
6600
6700
6800
6900
7000
7100
7200
7300
7400
7500
7600
7700
7800
7900
8000
8100
8200
8300
8400
8500
8600
8700
8800
8900
9000
9100
9200
9300
9400
9500
9600
9700
9800
9900
10000

USED ON	
---------	--

REF: KP-8010-730-400

PLUG, TRI-LOC
(SERIAL DIGITAL)

DRAWN	KH	DATE	04/06/95
DESIGN	DW	DATE	04/07/95
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

7705-2

GSD