


1 Amp Schottky Rectifier

1N5817G, 1N5818G, 1N5819G

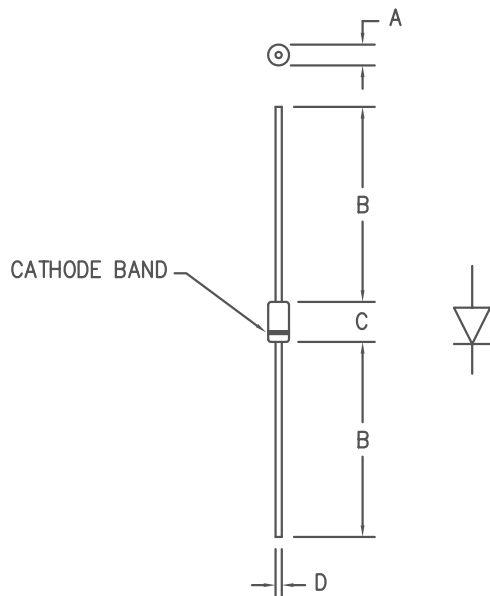

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.081	.107	2.057	2.718	Dia.
B	1.10	---	27.94	---	
C	.160	.205	4.064	5.207	
D	.028	.034	.711	.864	Dia.

GLASS HERMETIC D041

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
1N5817G	20V	20V
1N5818G	30V	30V
1N5819G	40V	40V

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Forward Voltage
- High Reliability
- High Current Capability

Electrical Characteristics					
		5817G	5818G	5819G	
Average forward current	I _{F(AV)}	1A	1A	1A	
Lead Temperature		120°C	110°C	105°C	
Maximum surge current	I _{FSM}	50A	50A	50A	
Max peak forward voltage	V _{FM}	.36V	.39V	.39V	
Max peak forward voltage	V _{FM}	.45V	.55V	.55V	
Max peak forward voltage	V _{FM}	.65V	.85V	.85V	
Max peak reverse current	I _{RM}	1mA	1mA	1mA	
Typical junction capacitance	C _J	105pF	50pF	50pF	

*Pulse test: Pulse width 300 μsec, Duty cycle 2%

R_{θJL} = 30°C/W, L = 1/4"
 8.3ms, half sine, T_J = 150°C
 I_{FM} = 0.1A: T_J = 25°C*
 I_{FM} = 1.0A: T_J = 25°C*
 I_{FM} = 3.0A: T_J = 25°C*
 V_{RRM}, T_J = 25°C
 V_R = 5.0V, T_J = 25°C

Thermal and Mechanical Characteristics		
Storage temperature range	T _{STG}	-65°C to 150°C
Operating junction temp range	T _J	-65°C to 150°C
Maximum thermal resistance	L = 1/4" R _{θJL}	30°C/W
Weight		Junction to Lead .012 ounces (0.38 grams) typical

7-1-04 Rev. 2

1N5817G

Figure 1
Typical Forward Characteristics

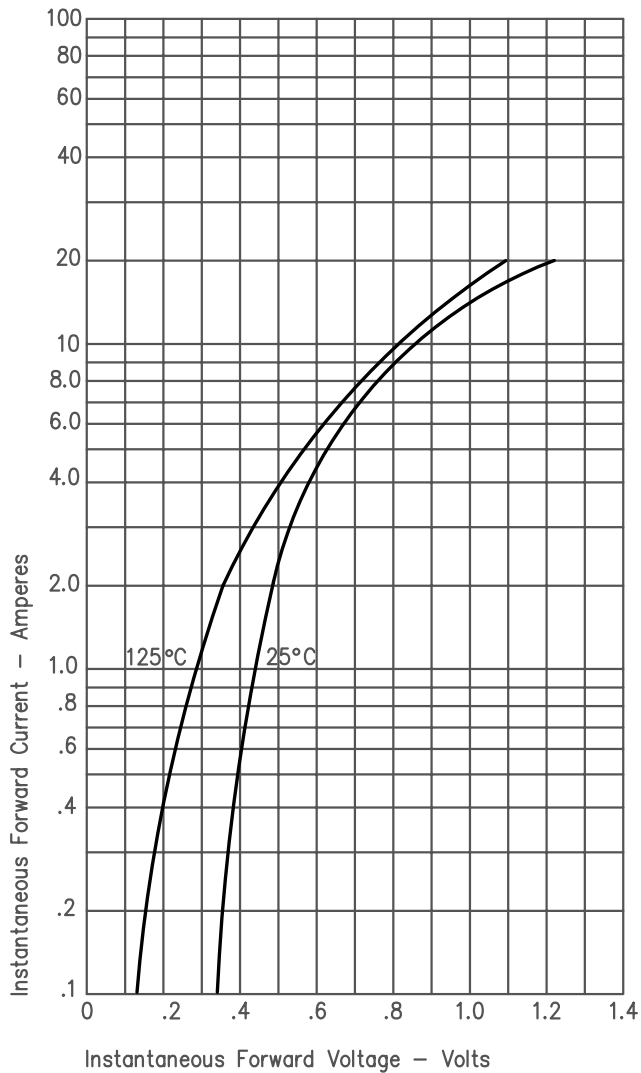


Figure 3
Typical Junction Capacitance


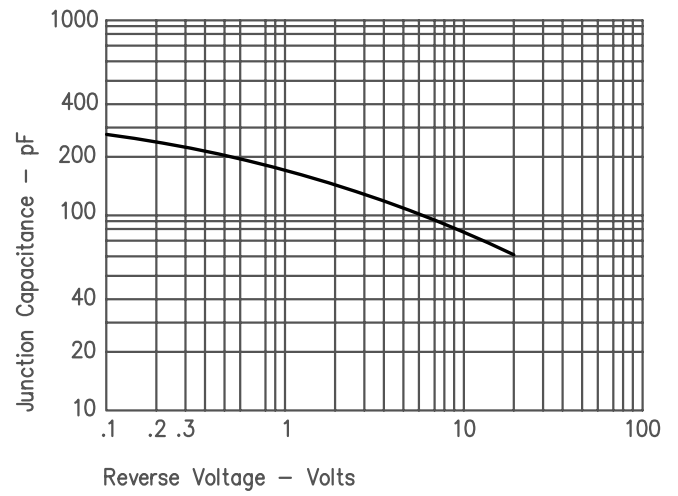


Figure 2
Typical Reverse Characteristics

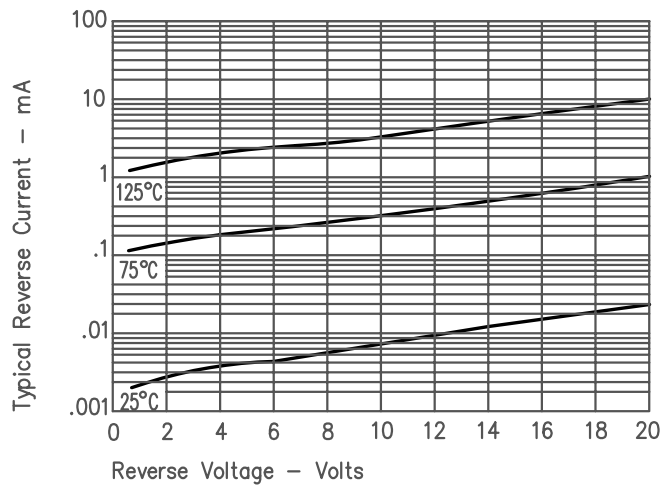

1N5818G & 1N5819G

Figure 1
Typical Forward Characteristics

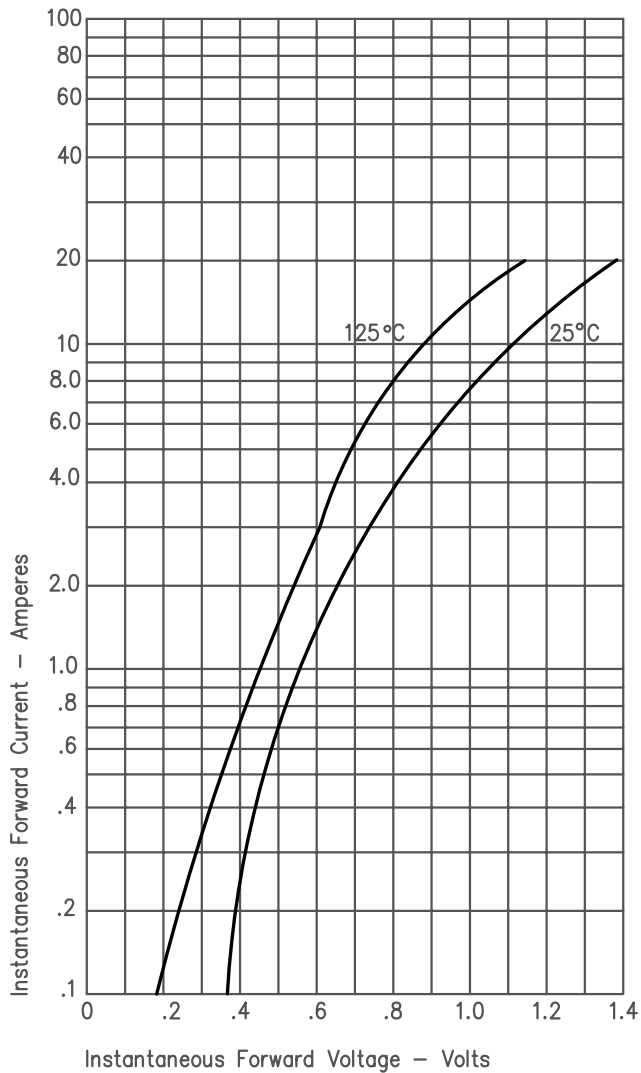


Figure 3
Typical Junction Capacitance

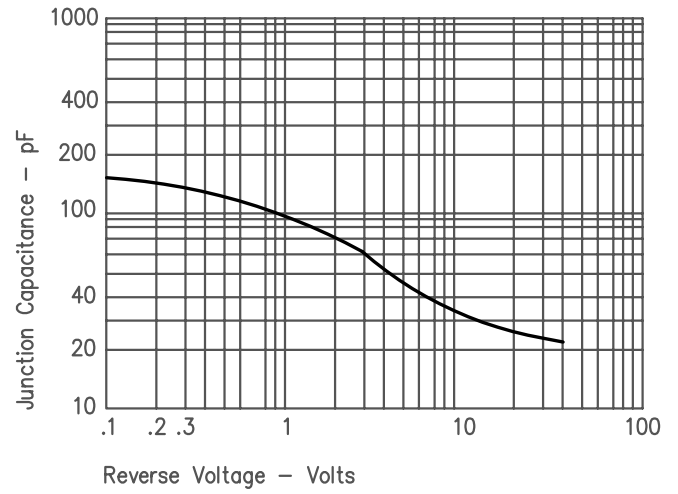


Figure 2
Typical Reverse Characteristics

