

PRELIMINARY
Notice: This is not a final specification.
Some parametric limits are subject to change.

MITSUBISHI SOUND PROCESSORS

M62495AFP

TONE CONTROL/VOLUME CONTROL

DESCRIPTION

The M62495AFP is a sound controller IC developed for mini-stereo set, general audio equipment. By serial data from microcomputer, it can realize sound controller of selector and 2-band tone control easily.


FEATURES

- Input selector (4 mode)
- Volume (0 ~ -84dB, the infinitesimal)
- REC OUT (on/off SW) or MIC mixing
- 20dB amp
- Tone control (Bass/Treble)
- Stereo/mono. SW

RECOMMENDED OPERATING CONDITIONS

Supply voltage range _____ VDD = +2.25 ~ +2.75V (typ. +2.5V)
VSS = -2.25 ~ -2.75V (typ. -2.5V)


SYSTEM BLOCK DIAGRAM

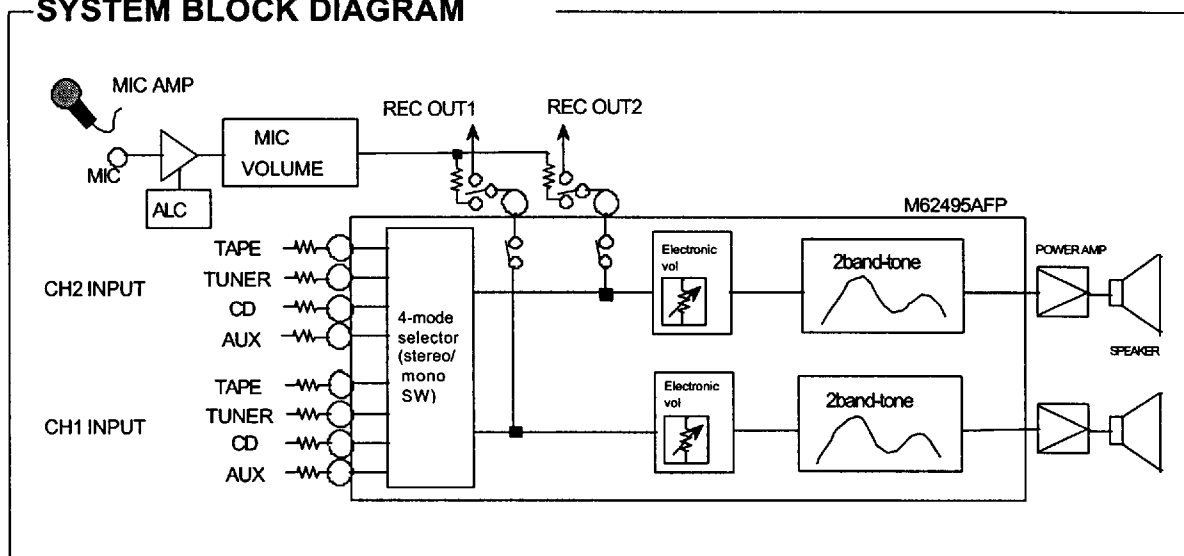

MITSUBISHI
ELECTRIC

(1 / 11)

BLOCK DIAGRAM

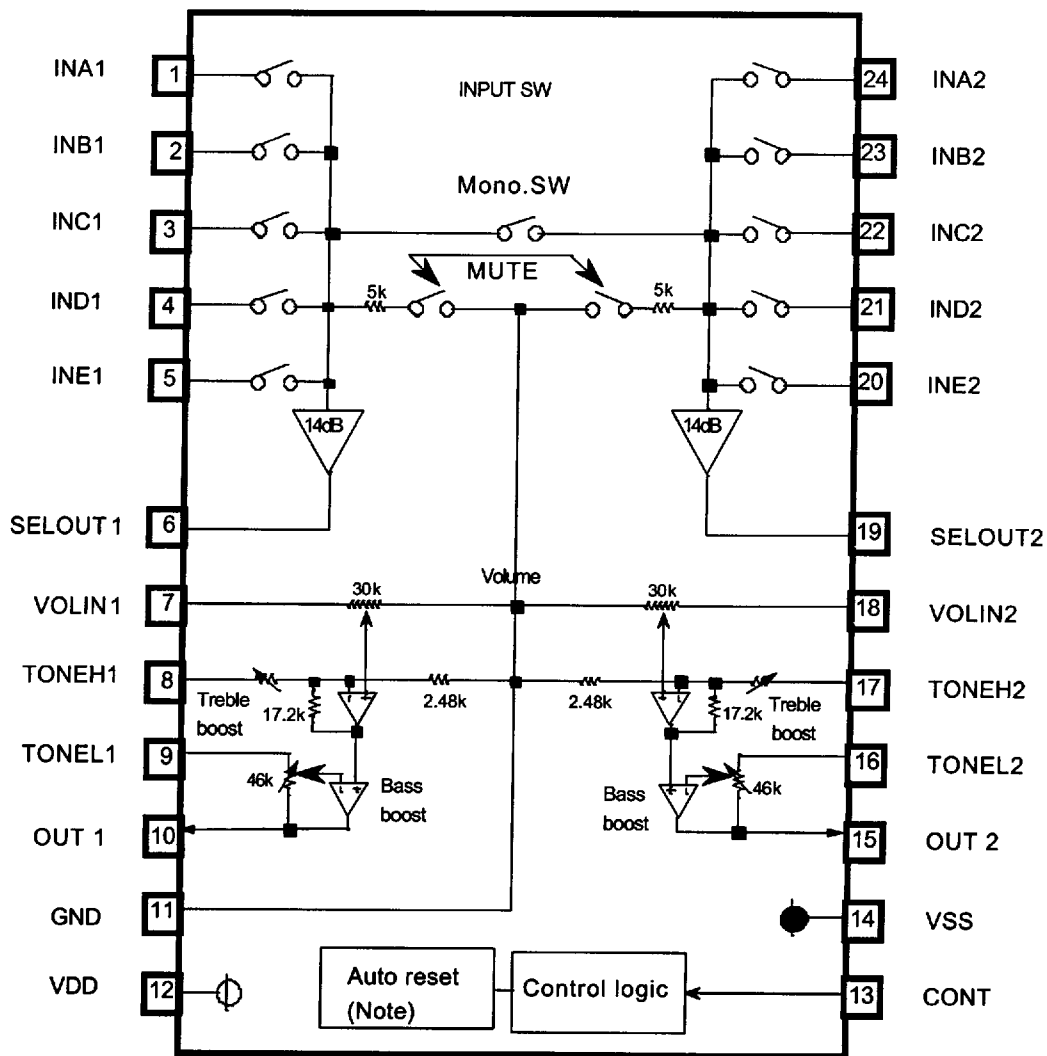

(Note) When power supply voltage (VDD-VSS) is under 3.3V (typ), it's fixed in a state of (2) on the page 6/11.

Units Resistance : ohm
Capacitance: F



MITSUBISHI
ELECTRIC

(2 / 11)

6249826 0027587 091

PIN DESCRIPTION

Pin No.	Name	Function
1	IN A1	INPUTs of the channel 1 The switch of INE can be controlled independently. Please set "ALL OFF" mode when the switch of E is only ON.
2	IN B1	
3	IN C1	
4	IN D1	
5	IN E1	
6	SELO1	OUTPUT of selectors 1
7	VOL1	INPUT of volume 1
8	TONEH1	Treble control adjustment of the channel 1
9	TONEL1	Bass control adjustment of the channel 1
10	OUT1	OUTPUT of the channel 1
11	GND	Ground
12	VDD	Supply voltage(+)
13	CONT	Control data input from a microcontroller
14	VSS	Supply voltage(-)
15	OUT2	OUTPUT of the channel 2
16	TONEL2	Bass control adjustment of the channel 2
17	TONEH2	Treble control adjustment of the channel 2
18	VOL2	INPUT of volume 2
19	SELO2	OUTPUT of selectors 2
20	IN E2	The switch of INE can be controlled independently. Please set "ALL OFF" mode when the switch of E is only ON. INPUTs of the channel 2
21	IN D2	
22	IN C2	
23	IN B2	
24	IN A2	



MITSUBISHI
ELECTRIC


(3 / 11)

ABSOLUTE MAXIMUM RATINGS

(Ta=25 °C, unless otherwise noted)

Symbol	Parameter	Test conditions	Rating	Unit
VDD-VSS	Supply voltage		6.0	V
K _θ	Thermal derating	Note:1	5	mW/°C
P _d	Power dissipation		500	mW
T _{opr}	Operating temperature		-20 ~ 75	°C
T _{stg}	Storage temperature		-40 ~ 125	°C

Thermal derating(maximum rating)

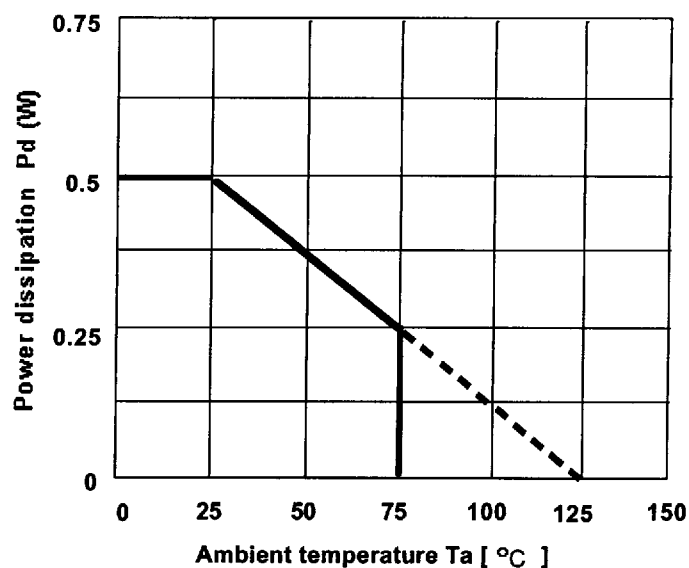

Note.1 reference PC Board

Size :70mmX70mm

Thickness:1.6mm

Material :glass epoxy

Copper pattern dimension

Width :0.25mm

Length :25 ~ 30mm/lead

Thickness:18um

Recommended operating conditions

Symbol	Parameter	Pin No.	Condition	Limits			Unit
				min.	typ.	max.	
VDD	Supply voltage(+)	12		2.25	2.5	2.75	V
VSS	Supply voltage(-)	14		-2.75	-2.5	-2.25	
CONT	Control data input voltage	13		GND	—	VDD	




MITSUBISHI
ELECTRIC

(4 / 11)

6249826 0027589 964

CONTROL SIGNALS SPECIFICATION

(1) Wave form

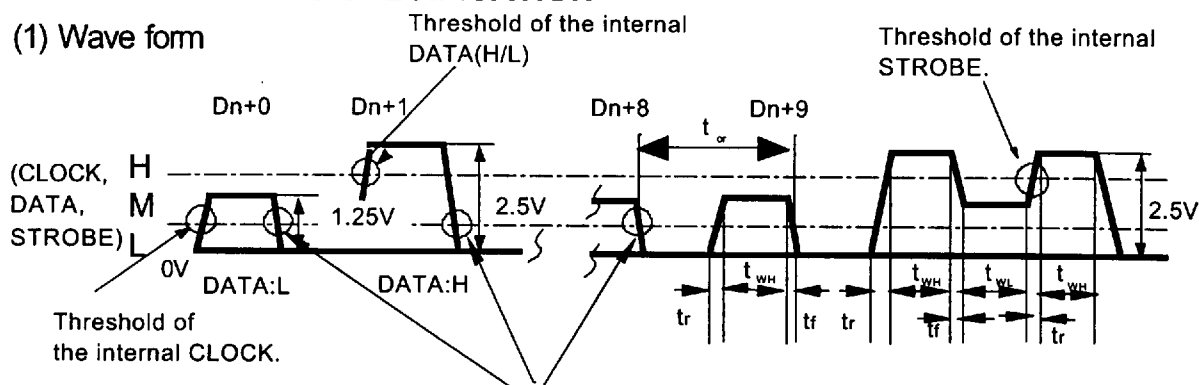

The internal DATA latch at the falling edges of this clock signal.

(2) Voltage control signal

Digital input signal		Condition	Limits			Unit
			min.	typ.	max.	
L signal	L	VDD=2.5V, VSS=-2.5V	GND	—	0.4	V
M signal	M	VDD=2.5V, VSS=-2.5V	1.0	1.25 (VDD/2)	1.5	
H signal	H	VDD=2.5V, VSS=-2.5V	2.1	—	VDD	


(3) Timing control signal

Symbol	Parameter	Limits			Unit
		min	typ	max	
t _α	Cycle time of digital signal	4	—	—	μsec
t _{wH}	Pulse width of digital signal("H"level)	1.6	—	—	
t _{wL}	Pulse width of digital signal("L"level)	1.6	—	—	
t _r	Rise time of digital signal	—	—	0.4	
t _f	Fall time of digital signal	—	—	0.4	

(4) Control signal example(Refer to page 6 on the control data)

An example of the mode control

INPUT :INA
 STEREO,VOLUME :0dB
 BASS :18dB
 TREBLE :6dB
 RECONT :ON
 MUTE :OFF

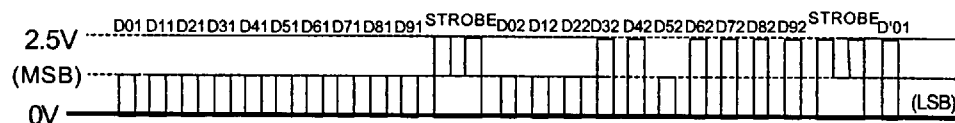

CONTROL DATA FORMAT

*It's necessary to set up the all control data after power on.

(1) INPUT DATA

(MSB) ← Input order

	D01	D11	D21	D31	D41	D51	D61	D71	D81	D91
Slot1	INPUT 0:IN A 1:IN B 2:IN C 3:IN D		D2 to D6:(a)Master volume condition					MUTE ON/OFF 0:OFF 1:ON (INPUT ALL OFF)	CHIP/SLOT SELECT 0:select 1:no select 2:no select 3:no select	
	D02	D12	D22	D32	D42	D52	D62	D72	D82	D92
Slot2	Mode select 0:stereo 1:mono1 only 2:mono2 only 3:mono1+2		Bass(boost) 0:0dB, 1:3dB, 2:6dB, 3:9dB, 4:12dB, 5:15dB, 6:18dB, 7:21dB			Treble(boost) 0:0dB, 1:3dB 2:6dB, 3:9dB		INE ON/OFF 0:OFF 1:ON	CHIP/SLOT SELECT 0:no select 1:no select 2:no select 3:select	

(a) Master volume

ATT	D21	D31	D41	D51	D61
-0.0dB	0	0	0	0	0
-2.0dB	1	0	0	0	0
-4.0dB	0	1	0	0	0
-6.0dB	1	1	0	0	0
-8.0dB	0	0	1	0	0
-10.0dB	1	0	1	0	0
-12.0dB	0	1	1	0	0
-14.0dB	1	1	1	0	0
-16.0dB	0	0	0	1	0
-18.0dB	1	0	0	1	0
-20.0dB	0	1	0	1	0
-22.0dB	1	1	0	1	0
-24.0dB	0	0	1	1	0
-26.0dB	1	0	1	1	0
-28.0dB	0	1	1	1	0
-30.0dB	1	1	1	1	0
-32.0dB	0	0	0	0	1
-34.0dB	1	0	0	0	1
-36.0dB	0	1	0	0	1
-40.0dB	1	1	0	0	1
-44.0dB	0	0	1	0	1
-48.0dB	1	0	1	0	1
-52.0dB	0	1	1	0	1
-56.0dB	1	1	1	0	1
-60.0dB	0	0	0	1	1
-64.0dB	1	0	0	1	1
-68.0dB	0	1	0	1	1
-72.0dB	1	1	0	1	1
-76.0dB	0	0	1	1	1
-80.0dB	1	0	1	1	1
-84.0dB	0	1	1	1	1
the infinitesimal	1	1	1	1	1

(b) Input select

Input select		D01	D11	D71	D72
IN A	IN E off	0	0	0	0
IN B		1	0		
IN C		0	1		
IN D		1	1		
IN A-D select	IN E on	* A:0 B:1 C:0 D:1	* 0 0 0 1	1	1 *1
				0	*2

*1) The input impedance is about 5k as input INE.

*2) INE can be controlled independently.

It can be used as Rec output.

(d) Mode control

Mode	D02	D12
stereo	0	0
mono1 only	1	0
mono2 only	0	1
mono1+2	1	1

(e) Treble control

Treble	D52	D62
0dB	0	0
3dB	1	0
6dB	0	1
9dB	1	1

(f) Bass control

Bass	D22	D32	D42
0dB	0	0	0
3dB	1	0	0
6dB	0	1	0
9dB	1	1	0
12dB	0	0	1
15dB	1	0	1
18dB	0	1	1
21dB	1	1	1

(2) Power-on condition

Parameter	Condition
Input select	ALL OFF
Master volume	the infinitesimal
MUTE	ON(Input ALLOFF)
Mode select	stereo
Bass	0dB
Treble	0dB
IN E	ON

(c) Chip/Slot control

Chip/Slot	D81	D91
slot1	0	0
no select	1	0
no select	0	1
slot2	1	1



MITSUBISHI
ELECTRIC

(6 / 11)

6249826 0027591 512

ELECTRICAL CHARACTERISTICS

(VDD=2.5V, VSS=-2.5V, f=1kHz, RL=10K, Vi=20mV(rms), Ta=25°C, unless otherwise noted)

Symbol	Parameter	Condition		Limits			Unit
				min.	typ.	max.	
IDD	Circuit current of positive power supply	Quiescent		—	14	30	mA
ISS	Circuit current of negative power supply	Quiescent		—	-14	-30	mA
Gv1	Voltage gain (selector)	1-5pin - 10pin gain RL=10k 24-20pin - 19pin gain		12	14	16	dB
Gv2	Voltage gain (output,tone,bass boost)	7pin - 10pin gain RL=10k 18pin - 19pin gain		16	18	20	dB
Vomax	Maximum output voltage	RL=10k,THD=1%		1.2	1.6	—	Vrms
THD	Total harmonic distortion	BW=400 ~ 30kHz		—	0.02	0.08	%
No1	Output noise voltage	JIS-A,Rg=5.1k		—	72	180	uVrms
No2		JIS-A, 7pin 18pin Rg=0		—	15	38	uVrms
ATTmax	Maximum attenuation	Output referencelevel(Vo=1Vrms), ATT= the infinitesimal ,JIS-A		—	-95	-90	dB
GB1	Bass boost	3dB	f=1kHz, Vo=80mVrms	1.5	3	4.5	dB
GB2		6dB		4.5	6	7.5	
GB3		9dB		7.5	9	10.5	
GB4		12dB		10.5	12	13.5	
GB5		15dB		13.5	15	16.5	
GB6		18dB		16.5	18	19.5	
GB7		21dB		19.5	21	22.5	
GT1	Treble boost	3dB	f=1kHz, Vo=80mVrms	1.5	3	4.5	dB
GT2		6dB		4.5	6	7.5	
GT3		9dB		7.5	9	10.5	




MITSUBISHI
ELECTRIC

6249826 0027592 459

(7 / 11)

TEST CIRCUIT

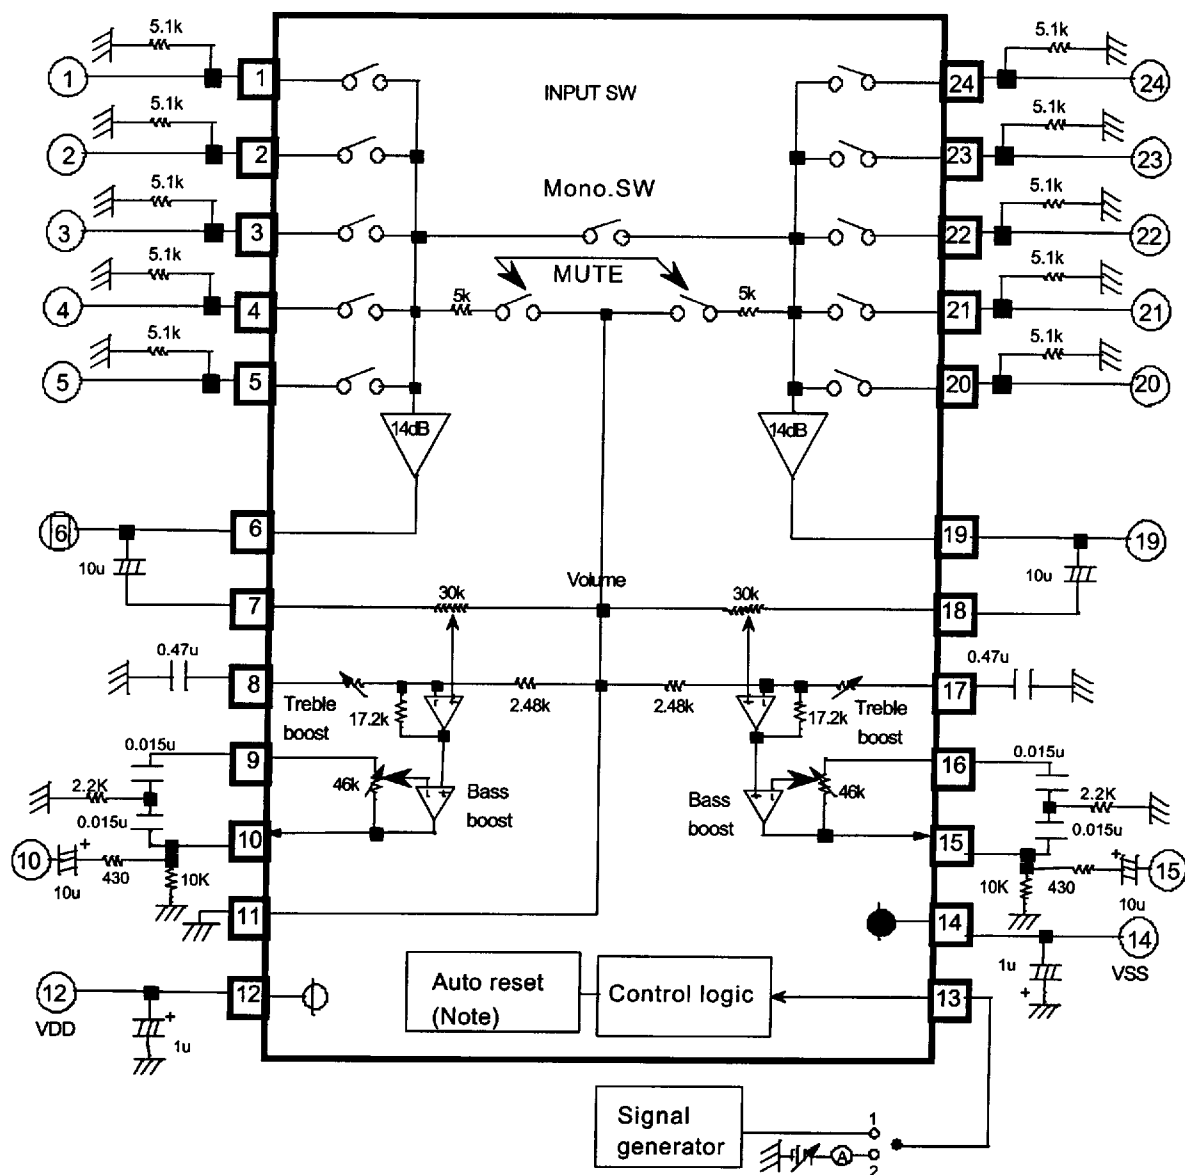

(Note) When power supply voltage (VDD-VSS) is under 3.3V (typ), it's fixed in a state of (2) on the page 6/11.

Units Resistance :ohm
Capacitance: F




MITSUBISHI
ELECTRIC

(8 / 11)

6249826 0027593 395

FUNCTION DESCRIPTION

(1) Equivalent circuit of the bass boost

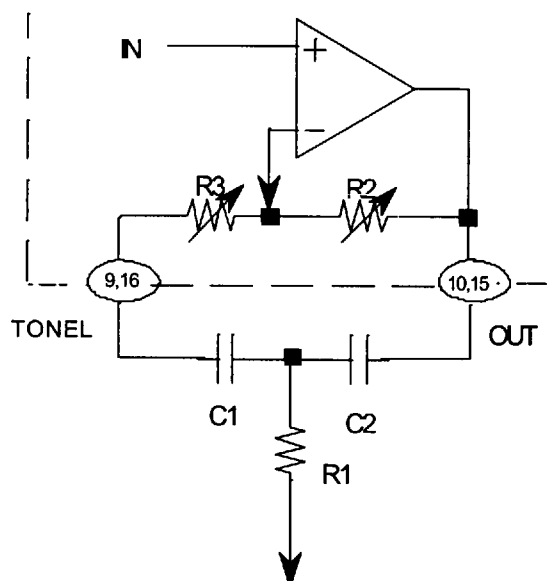

$$F_0 = \frac{1}{2\pi\sqrt{R1(R2+R3)C1C2}} \quad (\text{Hz})$$


$$Q = \frac{1}{C1+C2} \sqrt{\frac{C1C2R2}{R1}}$$

$$(C1=C2) \quad Gv = 20 \log \frac{\frac{R2+R3}{R1} + 2}{\frac{R3}{R1} + 2} \quad (\text{dB})$$

R2, R3 (typical)

Bass boost	3dB	6dB	9dB	12dB	15dB	18dB	21dB
Resistor	R2	15.4	25.7	32.9	38.7	41.6	44.2
(k)	R3	30.6	20.3	13.1	7.3	4.4	1.8
							0

(2) Equivalent circuit of the treble boost

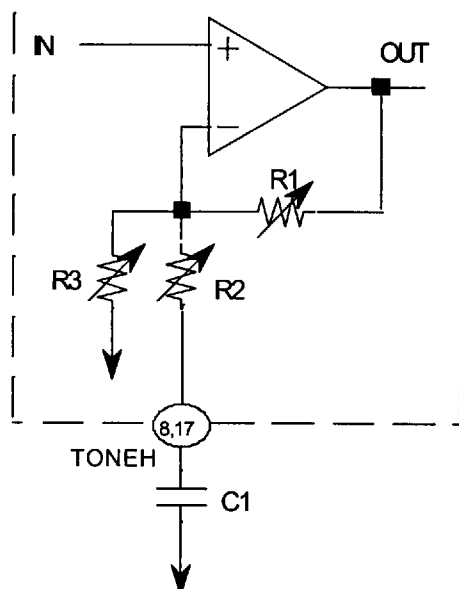

$$F_c = \frac{1}{2\pi R2 C1} \quad (\text{Hz})$$

$$Gv = 20 \log \frac{R1 + \{(R2+Zc)/R3\}}{(R2+Zc)/R3} \quad (\text{dB})$$

$$Zc = \frac{1}{j\omega C1} \quad (\text{ohm})$$

R2 (typical)


Treble boost	3dB	6dB	9dB
R2 (k)	5.3	2.2	1.2



MITSUBISHI
ELECTRIC

6249826 0027594 221

APPLICATION EXAMPLE

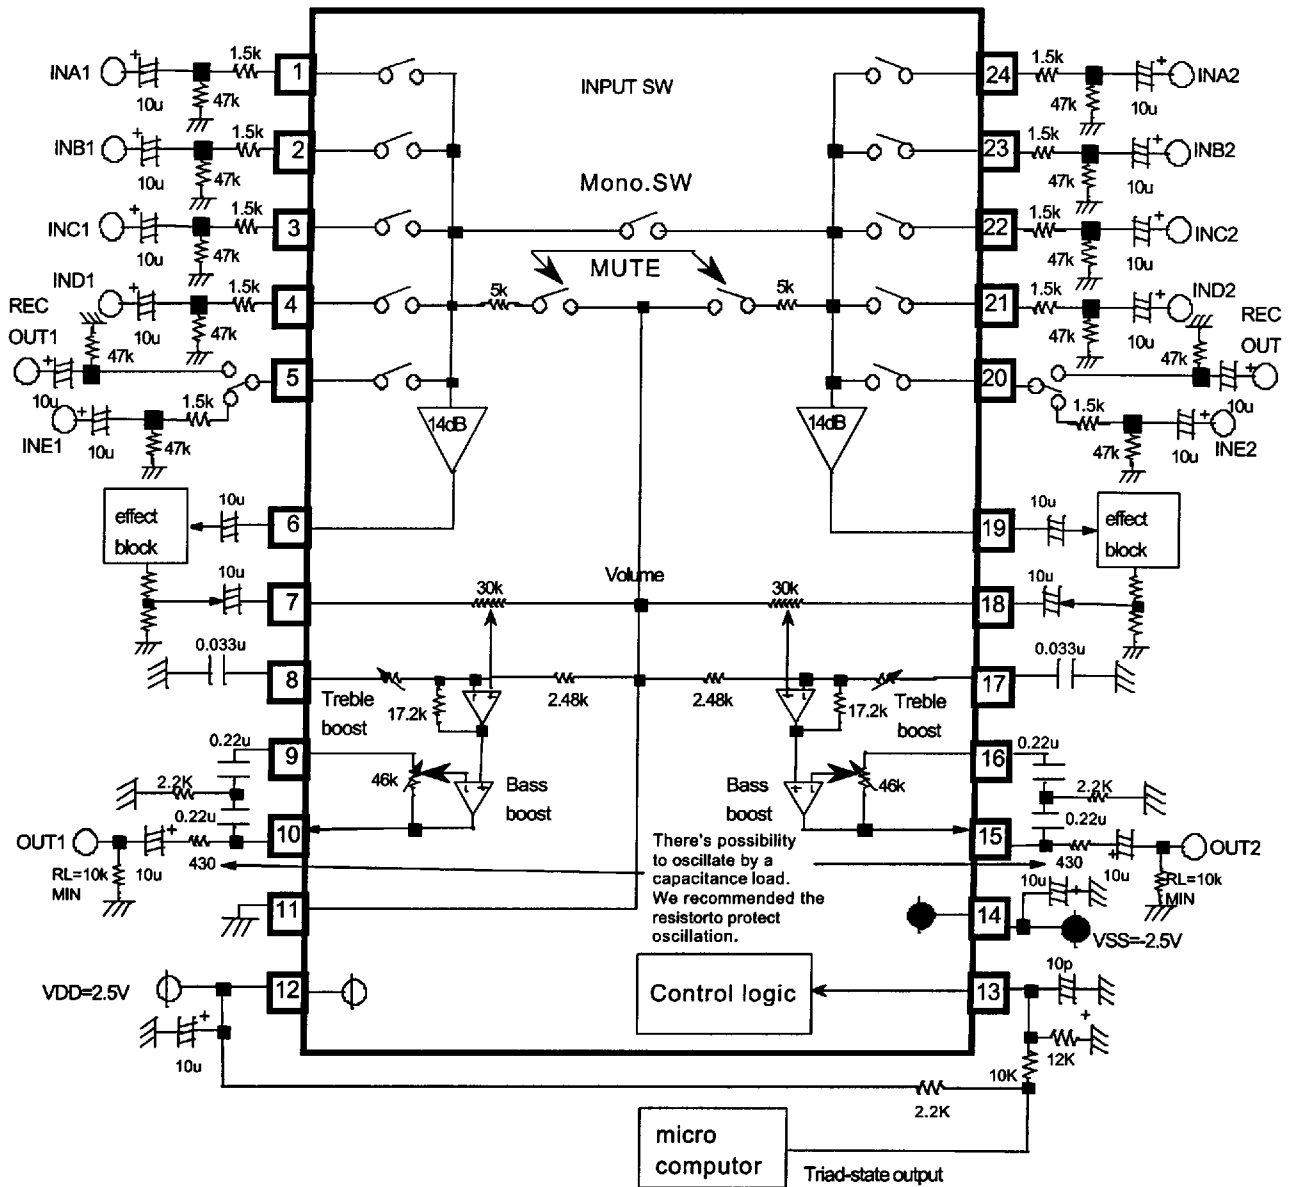

(Note) When power supply voltage (VDD-VSS) is under 3.3V (typ), it's fixed in a state of (2) on the page 6/11.

Units Resistance : ohm
Capacitance: F




MITSUBISHI
ELECTRIC

(10 / 11)

6249826 0027595 168

OUTLINE

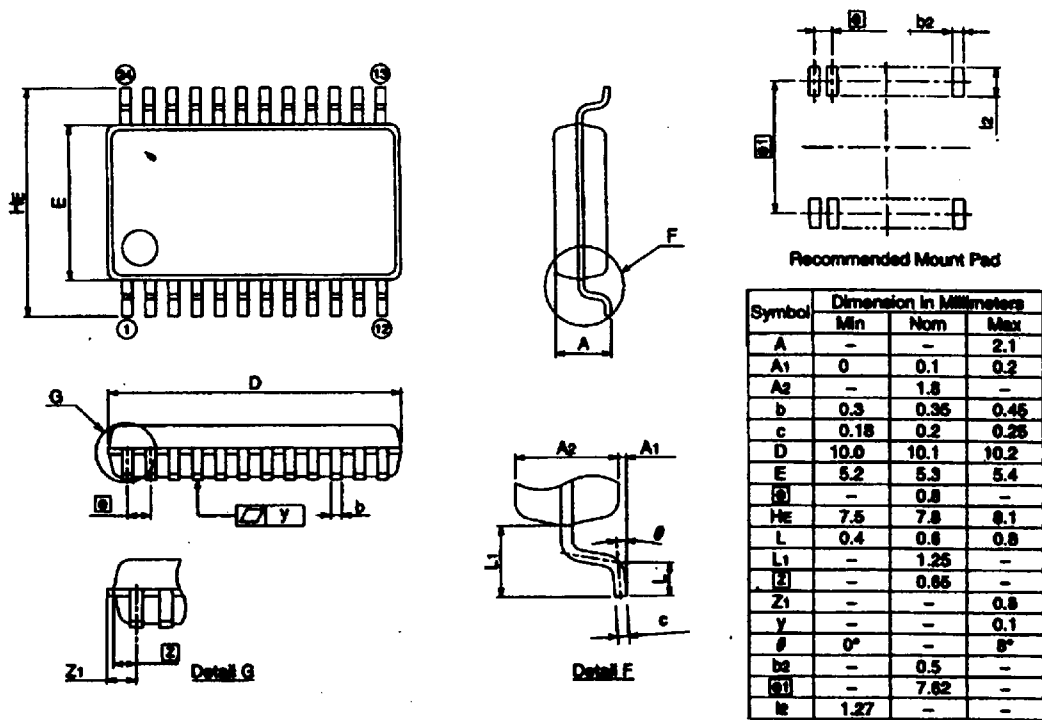

MITSUBISHI
ELECTRIC

6249826 0027596 OT4