


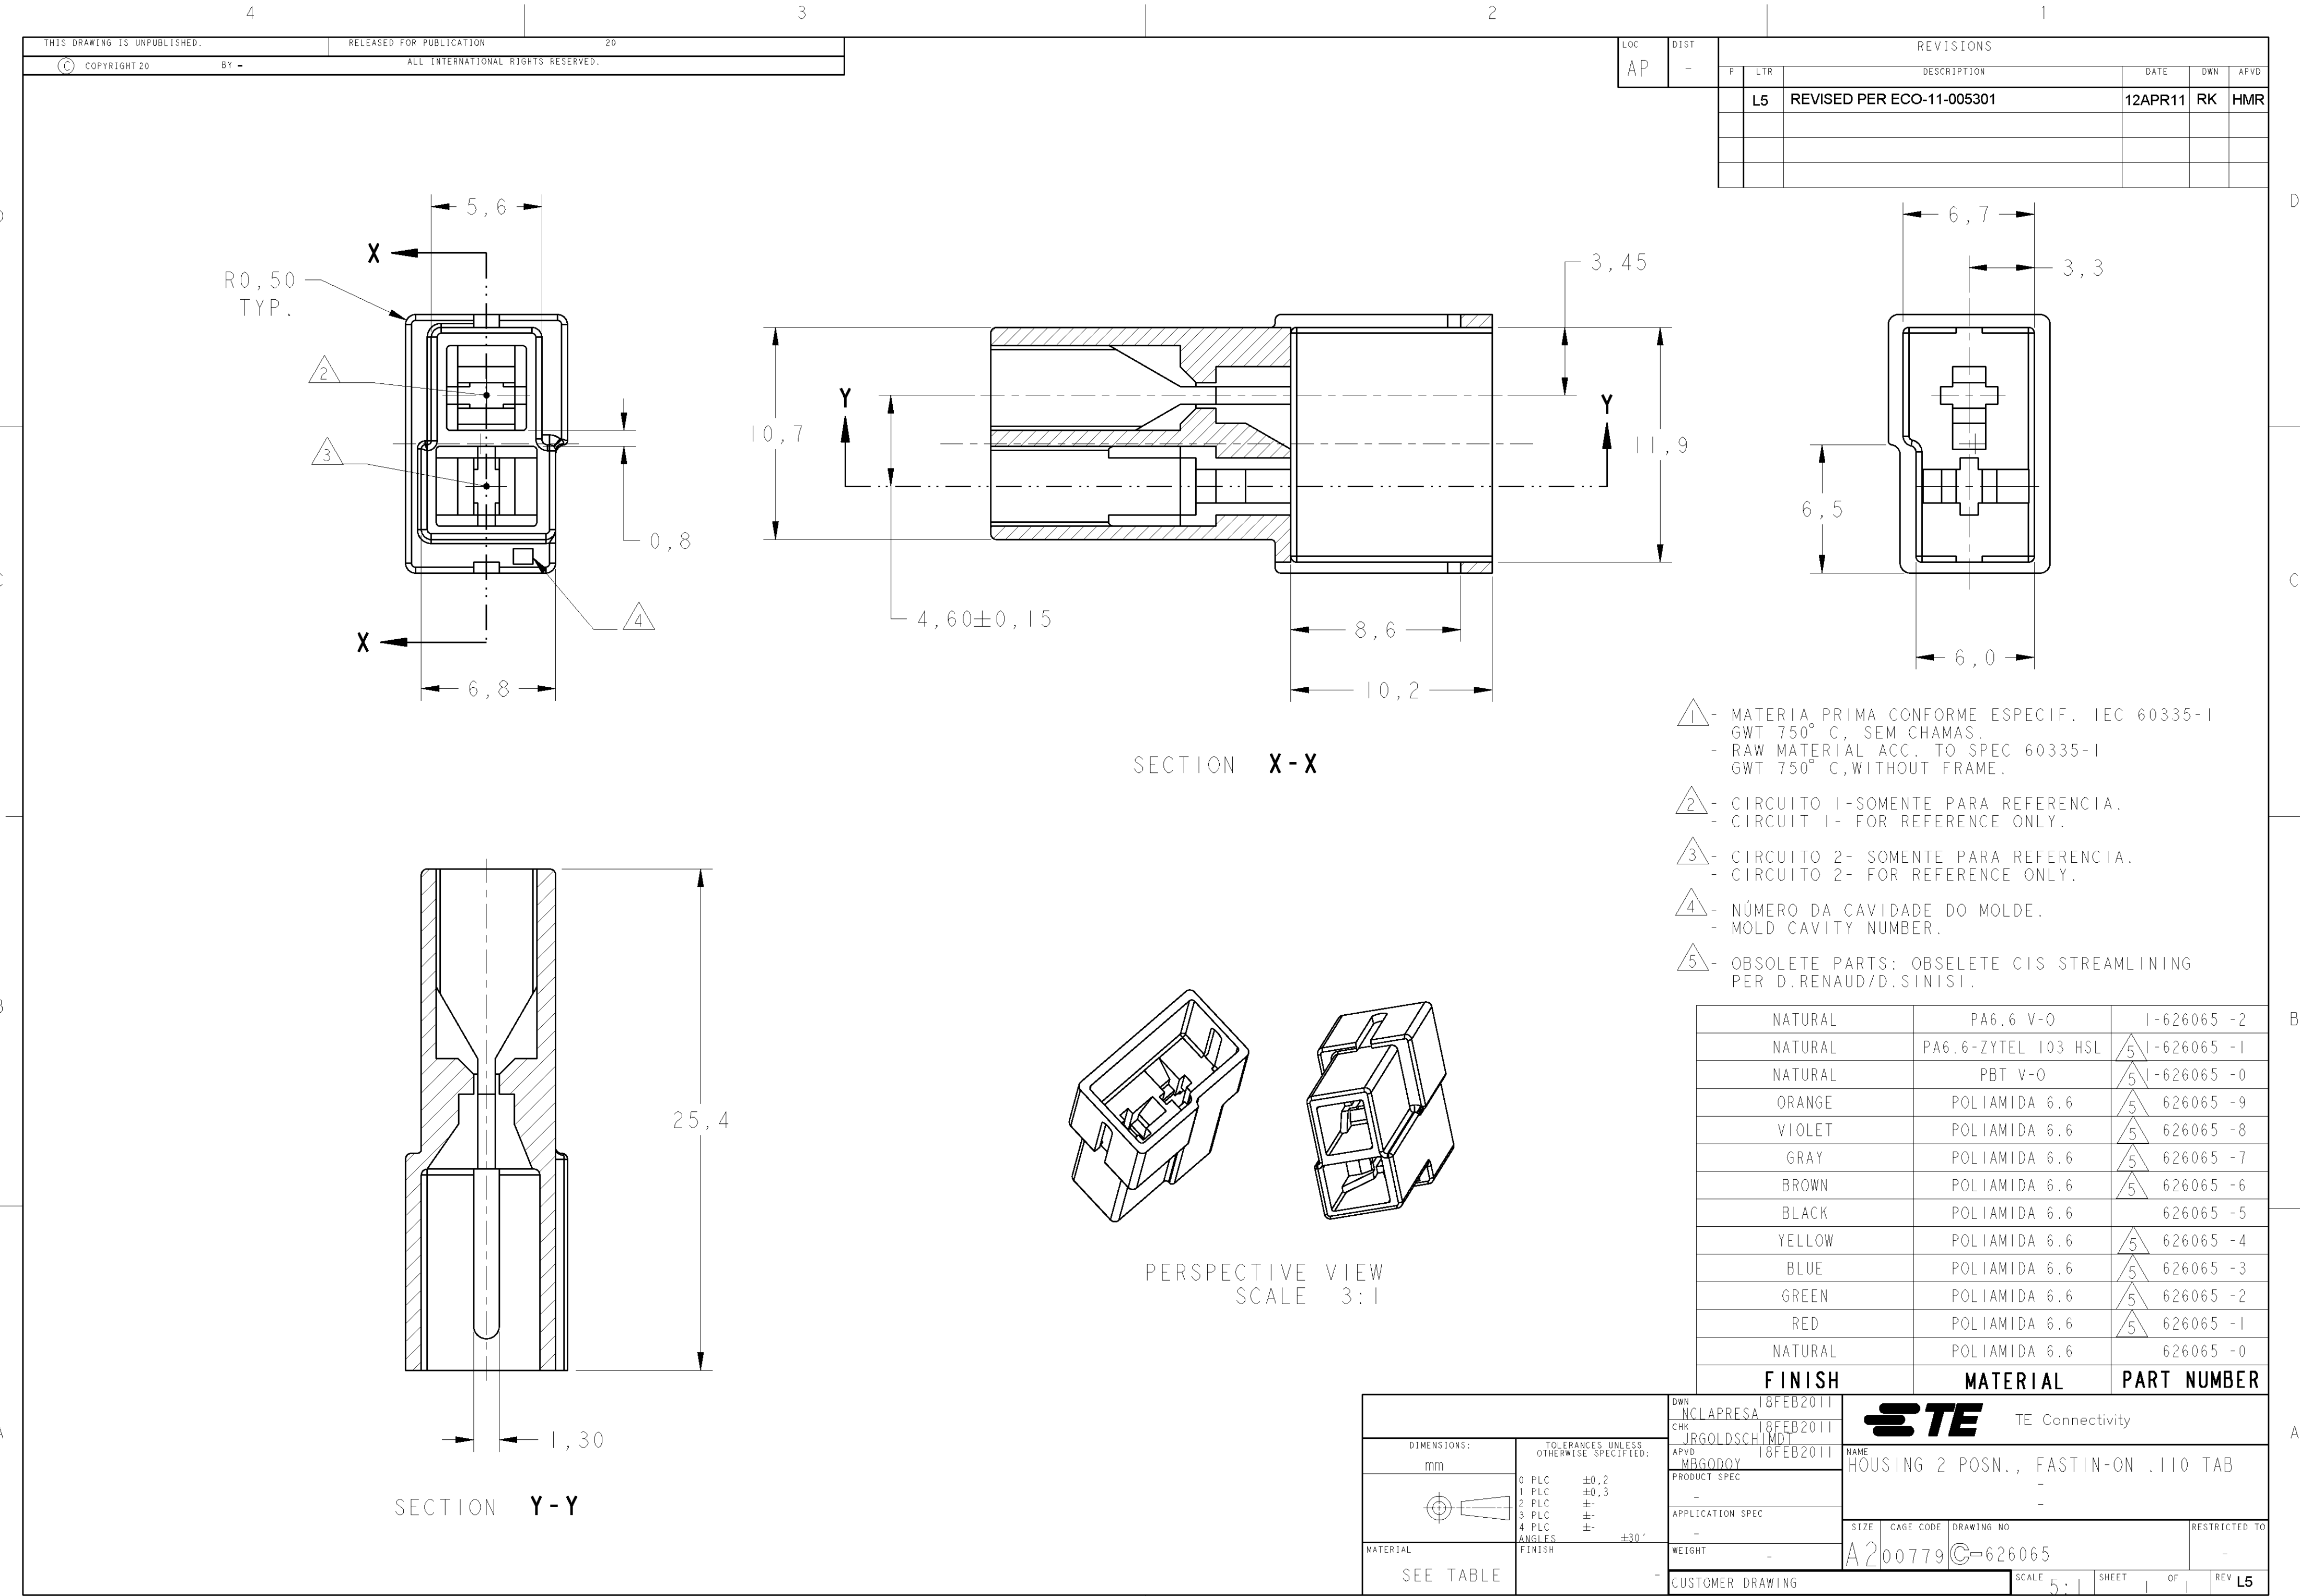

5,6

X

R0,50
TYP.

2

3

0,8

4

6,8

X

10,7

Y

4,60±0,15

8,6

10,2

Y

3,45

11,9

6,7

3,3

6,5

6,0

SECTION X-X

25,4

1,30

SECTION Y-Y

PERSPECTIVE VIEW

SCALE 3:1

1

2

3

4

5

MATERIA PRIMA CONFORME ESPECIF. IEC 60335-1
GWT 750° C, SEM CHAMAS.
- RAW MATERIAL ACC. TO SPEC 60335-1
GWT 750° C,WITHOUT FRAME.

CIRCUITO 1-SOMENTE PARA REFERENCIA.
- CIRCUIT 1- FOR REFERENCE ONLY.

CIRCUITO 2- SOMENTE PARA REFERENCIA.
- CIRCUITO 2- FOR REFERENCE ONLY.

NÚMERO DA CAVIDADE DO MOLDE.
- MOLD CAVITY NUMBER.

OBSOLETE PARTS: OBSLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI.

FINISH	MATERIAL	PART NUMBER
NATURAL	PA6.6 V-0	I-626065 -2
NATURAL	PA6.6-ZYTEL 103 HSL	5 I-626065 -1
NATURAL	PBT V-0	5 I-626065 -0
ORANGE	POLIAMIDA 6.6	5 626065 -9
VIOLET	POLIAMIDA 6.6	5 626065 -8
GRAY	POLIAMIDA 6.6	5 626065 -7
BROWN	POLIAMIDA 6.6	5 626065 -6
BLACK	POLIAMIDA 6.6	626065 -5
YELLOW	POLIAMIDA 6.6	5 626065 -4
BLUE	POLIAMIDA 6.6	5 626065 -3
GREEN	POLIAMIDA 6.6	5 626065 -2
RED	POLIAMIDA 6.6	5 626065 -1
NATURAL	POLIAMIDA 6.6	626065 -0

DIMENSIONS:

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±0,2
1 PLC ±0,3
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±30°
FINISH

MATERIAL

SEE TABLE

DWN 18FEB2011
CHK NCLAPRESA 18FEB2011
APVD JRGOLDSCHIMDT 18FEB2011
MBGODOY 18FEB2011

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

NAME HOUSING 2 POSN., FASTIN-ON .110 TAB

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A200779

C-626065

-

SCALE 5:1

SHEET 1

OF 1

REV L5

1471-9 (2/09)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-626065-2](#)