


GSD

6-1-99Z

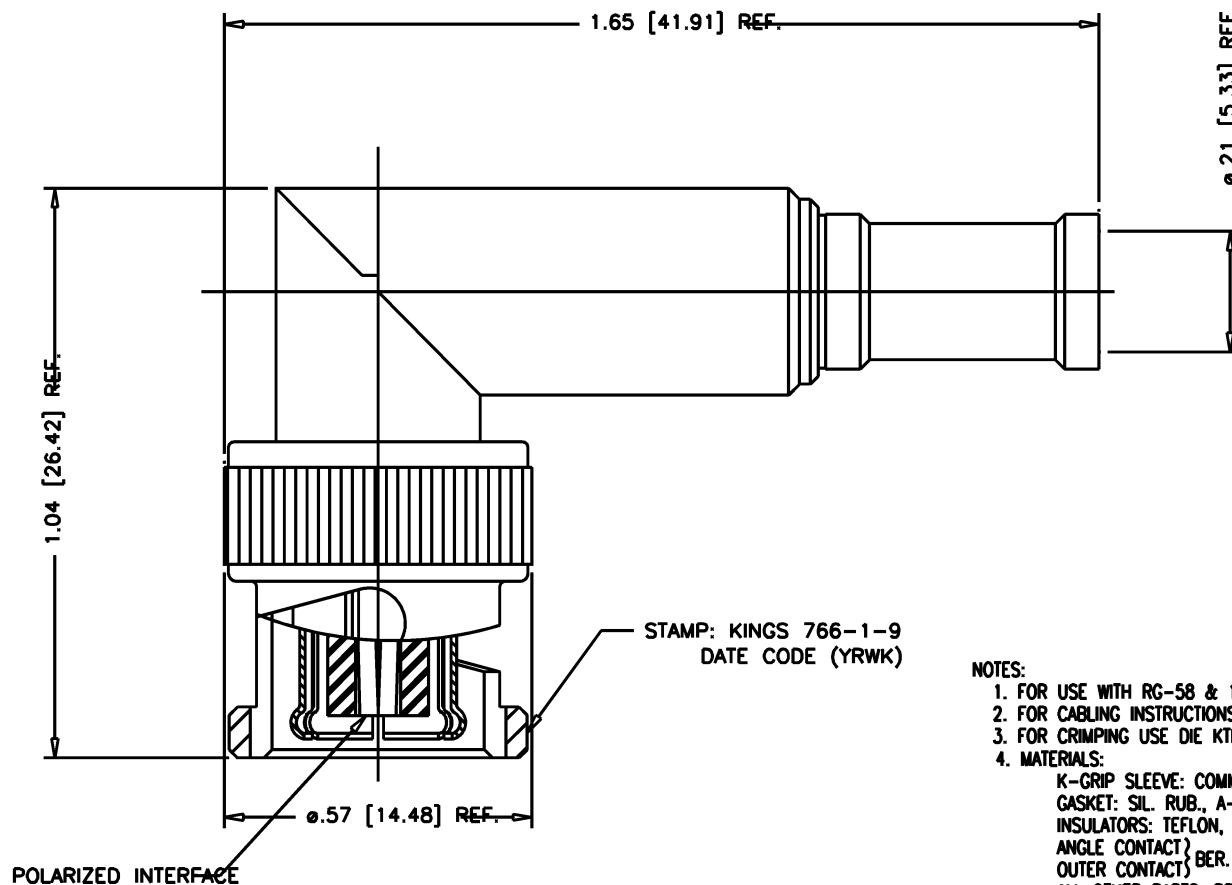

POLARIZED INTERFACE

STAMP: KINGS 766-1-9
DATE CODE (YRWK)

NOTES:

1. FOR USE WITH RG-58 & 141/U CABLE GROUPS.
2. FOR CABLING INSTRUCTIONS SEE CP-401.
3. FOR CRIMPING USE DIE KTH-2061.
4. MATERIALS:
 - K-GRIP SLEEVE: COMMERCIAL BRONZE, ASTM-B-135
 - GASKET: SIL. RUB., A-A-59588
 - INSULATORS: TEFLON, ASTM-D-4894
 - ANGLE CONTACT } BER. COPPER, ASTM-B-196
 - OUTER CONTACT }
 - ALL OTHER PARTS: BRASS, ASTM-B16
5. FINISHES:
 - CENTER CONTACTS: HARD GOLD PLATE PER ASTM-B488
 - OUTER CONTACT } SILVER PLATE PER ASTM-B700
 - SPRING CONTACT }
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINSH (TR-5)
6. ELECTRICAL CHARACTERISTICS:
 - FREQUENCY RANGE: DC TO 4 GHz.
 - VOLTAGE RATING: 500 VRMS
 - NOMINAL IMPEDANCE: 50 OHMS
7. DIMENSIONS IN INCHES [MM].

REVISIONS

ISSUE	CHANGES
2	CN 39861 A REDRAWN DCT 3/27/7

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, ANG, BNC, POL

DRAWN DCT	DATE 3/27/7
DESIGN	DATE
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

766-1-9

GSD