

108-5483

NUMBER :

Customer
ReleaseSECURITY
CLASSIFICATION:

3. Requirements :

3.1 Design and Construction :

Product shall be of the design, construction and physical dimensions specified on the applicable product drawing.

3.2 Materials :

A. Contact :

- (1) Material : Copper Alloy
- (2) Finish : Gold-plated on contact area only over nickel underplate all over

B. Housing :

- (1) Material : Glass-filled thermoplastic molded compound
- (2) Flammability : UL94 V-0

C. Other : (Hardware)

- (1) Material : Stainless steel

3.3 Performance Data :

- A. Dielectric Withstanding Voltage : 1,200 VAC
- B. Current Rating : 1 Pos. : 5 A, 260 Pos. : 0.8 A
- C. Temperature Rating : -55 °C to +85 °C

3.4 Performance Requirements and Test Descriptions :

The product shall be designed to meet the electrical, physical and environmental performance requirements specified in Fig. 1. All tests shall be performed in the room temperature, unless otherwise specified.

SHEET

2 OF 8

AMPAMP (Japan), Ltd.
Kawasaki, JapanLOC
JLOC
A

NO.

108-5483

REV.
B

NAME

M-ZIF Connector

108-5483

NUMBER :

Customer
ReleaseSECURITY
CLASSIFICATION :

3.5 Test Requirements and Procedures Summary :

Para.	Test Items	Requirements	Procedures
3.5.1	Confirmation of Product	Product shall be conforming to the requirements of applicable product drawing and Application Specification.	Visual inspection No Physical damage.
Electrical Requirements			
3.5.2	Termination Resistance (Low Level)	15 m Ω Max. (Initial) 15 m Ω Max. (Final)	Subject mated contacts assembled in housing to 50 mV Max open circuit at 50 mA Fig. 2 AMP Spec. 109-5311-1
3.5.3	Insulation Resistance	5000 M Ω Min. (Initial)	Impressed voltage 500 V DC. Test between adjacent circuits of mated connectors. AMP Spec. 109-5302 MIL-STD-202, Method 302 Condition B
3.5.4	Dielectric withstanding Voltage	No creeping discharge nor flashover shall occur. Current leakage : 5 mA Max.	1200 VAC for 1 minute. Test between adjacent circuits of mated connectors. AMP Spec. 109-5301 MIL-STD-202, Method 301
3.5.5	Temperature Rising	30 °C Max. under loaded specified current.	Measure temperature rising by energized current. Fig. 2 AMP Spec. 109-5310

Fig. 1 (To be continued)

SHEET

3 OF 8

AMPAMP (Japan), Ltd.
Kawasaki, JapanLOC
JLOC
A

NO.

108-5483

REV.
B

NAME

M-ZIF Connector

108-5483	NUMBER:	Customer Release	SECURITY CLASSIFICATION:	Para.	Test Items	Requirements	Procedures
				Physical Requirements			
				3.5.6	Durability (Repeated Mate / Unmating)		Manual Operation No. of Cycles : 50 cycles. AMP Spec. 109-5213
				3.5.7	Durability (Repeated Mate / Unmating)	15 mΩ Max. (Final) No physical damage shall occur	Operation Speed : 2000 cycles/hr No. of Cycles : 10000 cycles. AMP Spec. 109-5213
				3.5.8	Vibration (Low Frequency)	No electrical discontinuity greater than 1 μsec. shall occur. No physical damage shall occur	Subject mated connectors to 10-55-10 Hz traversed in 1 minute at 1.52 mm amplitude 2 hours each of 3 mutually perpendicular planes. 100 mA applied. AMP Spec. 109-5201 MIL-STD-202, Method 201A
				3.5.9	Physical Shock	No electrical discontinuity greater than 1 μsec. shall occur. No physical damage shall occur	Accelerated Velocity: 490 m/s ² (50 G) Waveform : Half Sinewave Duration : 11 m sec. Velocity Change : 11.3 m/s Number of Drops : 3 drops each to normal and reversed directions of X, Y and Z axes, totally 18 drops AMP Spec. 109-5208 Condition A MIL-STD-202, Method 213A
				3.5.10	Solderability (solder type only)	15 mΩ Max. (Final) Wet Solder Coverage : 95% Min.	Solder Temperature : 235 °C Immersion duration : 5 sec. AMP Spec. 109-5203 MIL-STD-202 Method 208
				3.5.11	Resistance to Soldering Heat (solder type only)	15 mΩ Max. (Final) No physical damage shall occur	Test connector on PCB Solder Temperature : 260 °C Immersion duration : 10 sec. AMP Spec. 109-5204 Condition B MIL-STD-202 Method 210A

Fig. 1 (To be continued)

SHEET 4 OF 8	AMP			AMP (Japan), Ltd. Kawasaki, Japan	
	LOC J	LOC A	NO. 108-5483	REV. B	
NAME M-ZIF Connector					

108-5483 MEMBER : Customer Release SECURITY CLASSIFICATION:	Para.	Test Items	Requirements	Procedures
	Environmental Requirements			
	3.5.12	Thermal Shock	15 mΩ Max. (Final) No physical damage shall occur	Mated connector - 55 °C/30 min., + 85 °C/30 min. Making this a cycle, repeat 60 cycles. AMP Spec. 109-5103 Condition A-2 MIL-STD-202, Method 107D
	3.5.13	Humidity-Temperature Cycling	15 mΩ Max. (Final) No physical damage shall occur	Mated connector, 25~65 °C, 90~95 % R. H. 10 cycles Cold shock - 10 °C performed AMP Spec. 109-5106 MIL-STD-202, Method 106D
	3.5.14	Industrial Gas (SO ₂)	15 mΩ Max. (Final) No physical damage shall occur	Mated connector SO ₂ Gas : 10 ppm, 95 % R. H. 25 °C, 48 hours AMP Spec. 109-5107
	3.5.15	Temperature Life (Heat Aging)	15 mΩ Max. (Final) No physical damage shall occur	85 °C Duration : 250 Hrs AMP Spec. 109-5104 MIL-STD-202, Method 108A Condition B
3.5.16	Salt Spray	15 mΩ Max. (Final)	Subject mated connectors to 5%, 35 °C Salt concentration for 96 hours : AMP Spec. 109-5101 Condition A MIL-STD-202, Method 101	

Fig. 1 (End)

SHEET	AMP AMP (Japan), Ltd. Kawasaki, Japan		
	LOC J	LOC A	NO. 108-5483
5 OF 8	NAME		REV. B
M-ZIF Connector			

3.6 Product Qualification and Requalification Tests.

Test or Examination	Test Group											
	1	2	3	4 (b)	5 (b)	6 (c)	7 (c)	8	9	10	11	12
	Test Sequence (a)											
Confirmation of Product	1	1	1	1	1	1	1	1	1	1	1	1
Termination Resistance (Low Level)			2, 5	2, 5	2, 5	2, 5	2, 5	2, 5	2, 5	2, 5	2, 5	2, 5
Durability (Mate/Unmate 50 cycle)			3	3	3	3	3	3	3	3	3	3
Insulation Resistance	2											
Dielectric withstanding Voltage	3											
Temperature Rising		2										
Durability (Mate/Unmate 10000 cycle)			4									
Vibration (Low Frequency)				4								
Physical Shock					4							
Solderability						4						
Resistance to Soldering Heat							4					
Thermal Shock								4				
Humidity Temperature Cycling									4			
Industrial SO ₂ Gas										4		
Temperature Life (Heat Aging)											4	
Salt Spray												4

- (a) Numbers indicate sequence in which tests are performed.
- (b) Discontinuities shall not take place in this test group, during tests.
- (c) Solder type only.

SHEET

6 OF 8

AMPAMP (Japan), Ltd.
Kawasaki, JapanLOC
JLOC
A

NO.

108-5483

REV.
B

NAME

M-ZIF Connector

.. ..

NUMBER:
108-5483

CUSTOMER:

Customer
ReleaseSECURITY
CLASSIFICATION:

108-5483

NUMBER:

Customer
ReleaseSECURITY
CLASSIFICATION:

The applicable product descriptions are as shown in Appendix. 1.

M-ZIF Connector Descriptions
Plug Connector Action Pin Type
Plug Connector Solder Type
Rec. Connector Action Pin type
Rec. Connector Solder Pin type

Appendix 1

SHEET

7 OF 8

AMPAMP (Japan), Ltd.
Kawasaki, JapanLOC
JLOC
A

NO.

108-5483


REV.
B

NAME

M-ZIF Connector

108-5483


NUMBER:

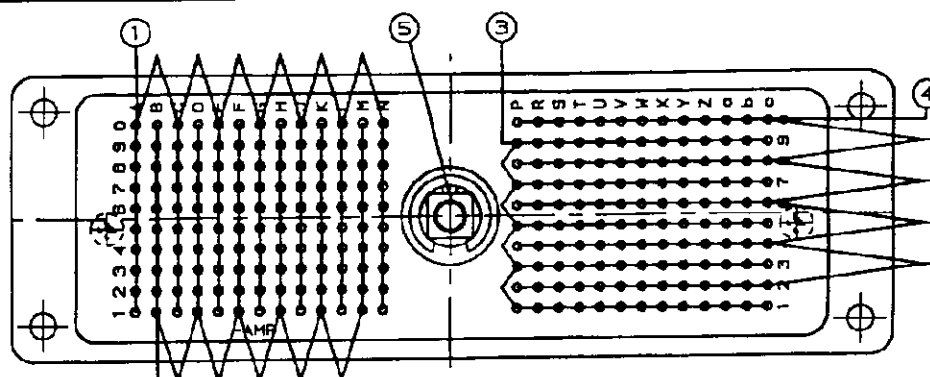Customer
ReleaseSECURITY
CLASSIFICATION:

② Insulation, Dielectric withstanding voltage

S-S = ①↔②, ③↔④

S-H = ①②③④↔⑤

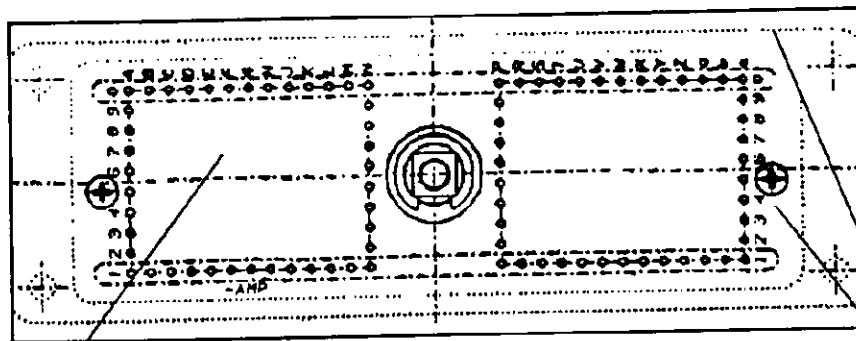

Temperature Measure Point

Low Level Measure Circuit No.

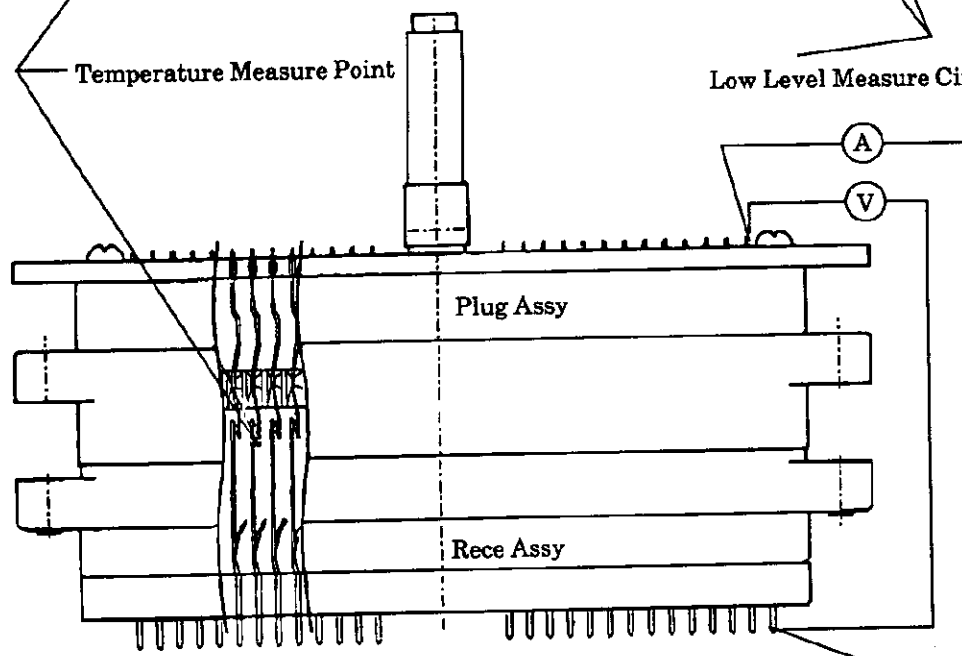


Fig. 2

SHEET

8 OF 8

AMPAMP (Japan), Ltd.
Kawasaki, JapanLOC
JLOC
A

NO.

108-5483

REV.
B

NAME

M-ZIF Connector