

TOSHIBA BIPOLAR DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

TD62387AFN, TD62388AFN

8ch LOW INPUT ACTIVE DARLINGTON SINK DRIVER

The TD62387AFN and TD62388AFN are non-inverting transistor arrays, which are comprised of eight NPN darlington output stages and PNP input stages.

All units feature integral clamp diodes for switching inductive loads.

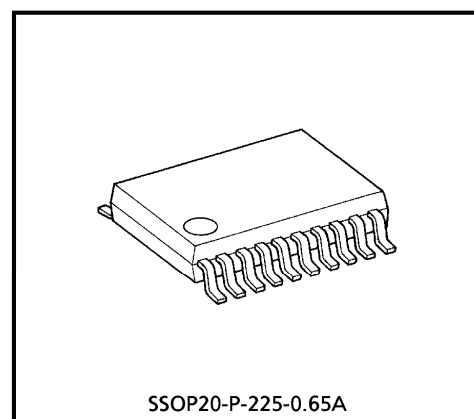
These devices are Low Level input active drivers and are suitable for operations with TTL, 5V CMOS and 5V Microprocessor which have sink current output drivers.

Applications include relay, hammer, lamp and LED driver.

FEATURES

- Package Type : SSOP20 pin
- High Sustaining Voltage : 50V (Min.)
- Output Current (Single Output) : 500mA / ch (Max.)
- Output Clamp Diodes
- Input : LOW LEVEL ACTIVE
- Standard Supply Voltage
- Inputs Compatible with TTL and 5V CMOS

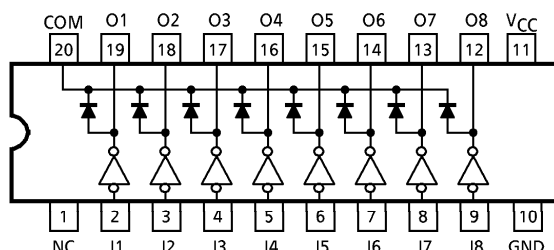
TYPE	$V_{IN} (ON)$
TD62387AFN	0V ~ $V_{CC} - 3.7V$
TD62388AFN	



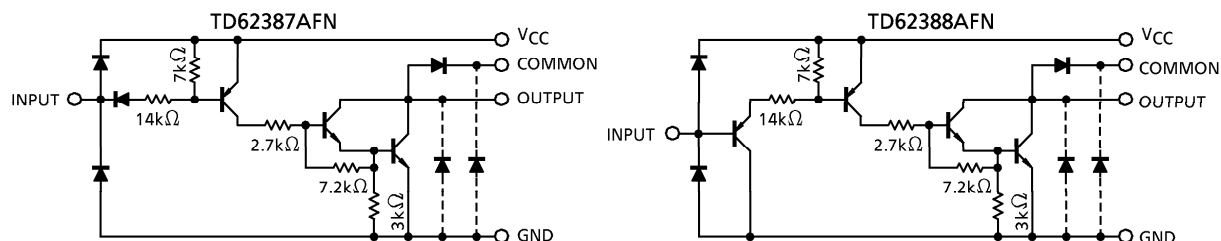
SSOP20-P-225-0.65A

Weight : 0.09g (Typ.)

PIN CONNECTION (TOP VIEW)



SCHEMATICS (EACH DRIVER)



Note : The output parasitic diode cannot be used as clamp diodes.

961001EBA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V _{CC}	- 0.5~7.0	V
Output Sustaining Voltage	V _{CE (SUS)}	- 0.5~50	V
Output Current	I _{OUT}	500	mA / ch
Input Voltage	V _{IN}	- 0.5~7.0	V
Input Current	I _{IN}	- 10	mA
Clamp Diode Reverse Voltage	V _R	50	V
Clamp Diode Forward Current	I _F	500	mA
Power Dissipation	P _D *	0.96	W
Operating Temperature	T _{opr}	- 40~85	°C
Storage Temperature	T _{stg}	- 55~150	°C

* : On Glass Epoxy PCB
(50 × 50 × 1.6mm Cu 40%)

RECOMMENDED OPERATING CONDITIONS (Ta = - 40~85°C)

CHARACTERISTIC	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V _{CC}		4.5	5.0	5.5	V
Output Sustaining Voltage	V _{CE(SUS)}		0	—	50	V
Output Current	I _{OUT} *	DC 1Circuit	0	—	350	mA / ch
		T _{pw} = 25ms, 8Circuits	0	—	180	
		Ta = 85°C, T _j = 120°C	0	—	90	
		Duty = 50%	0	—	90	
Input Voltage	V _{IN}		0	—	5.5	V
Clamp Diode Reverse Voltage	V _R		—	—	50	V
Clamp Diode Forward Current	I _F		—	—	400	mA
Power Dissipation	P _D		—	—	0.4	W

* : On Glass Epoxy PCB (50 × 50 × 1.6mm Cu 40%)







961001EBA2'



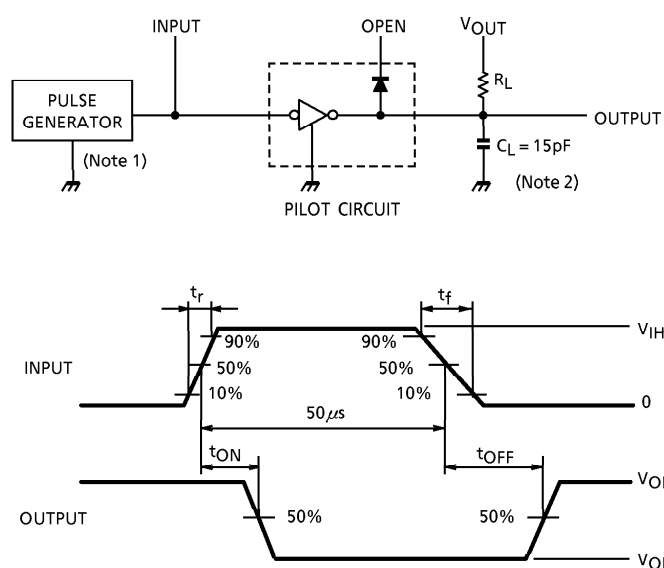
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CIR- CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Leakage Current	I_{CEX}	1	$V_{CC} = 5.5V$, $I_{IN} = 0$ $V_{OUT} = 50V$, $T_a = 85^\circ C$	—	—	100	μA
Output Saturation Voltage	$V_{CE(sat)}$	2	$V_{CC} = 4.5V$, $V_{IN} = V_{IN(ON)Max.}$ $I_{OUT} = 350mA$	—	1.4	2.0	V
Input Current	Output On	3	$V_{CC} = 5.5V$, $V_{IN} = 0.4V$	—	-0.32	-0.45	mA
	Output Off	4	$V_{CC} = 5.5V$, $V_{IN} = -20V$	—	—	-2.6	
				—	—	-4.0	μA
Input Voltage (Output on)	$V_{IN(ON)}$	5		—	—	$V_{CC} - 3.7$	V
Clamp Diode Reverse Current	I_R	6	$V_R = 50V$, $T_a = 25^\circ C$ *1	—	—	50	μA
			$V_R = 50V$, $T_a = 85^\circ C$ *1	—	—	100	
Clamp Diode Forward Current	V_F	7	$I_F = 350mA$	—	—	2.0	V
			$I_F = 280mA$	—	—	1.8	
Supply Current	$I_{CC(ON)}$	8	$V_{CC} = 5.5V$, $V_{IN} = 0$	—	17	22	mA
	$I_{CC(OFF)}$		$V_{CC} = 5.5V$, $V_{IN} = V_{CC}$	—	—	100	
Turn-On Delay	t_{ON}	9	$V_{CC} = 5V$, $V_{OUT} = 50V$ *1 $R_L = 125\Omega$, $C_L = 15pF$	—	0.1	—	μs
Turn-Off Delay	t_{OFF}			—	3	—	

TEST CIRCUIT

1. I_{CEX} 2. $V_{CE(sat)}$ 3. $I_{IN(ON)}$ 4. $I_{IN(OFF)}$ 5. $V_{IN(ON)}$ 6. I_R 

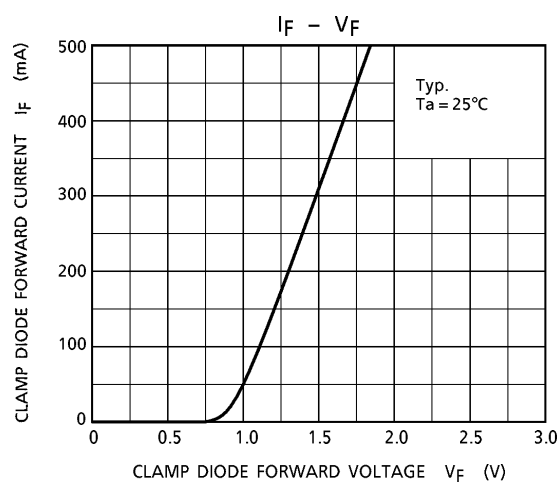
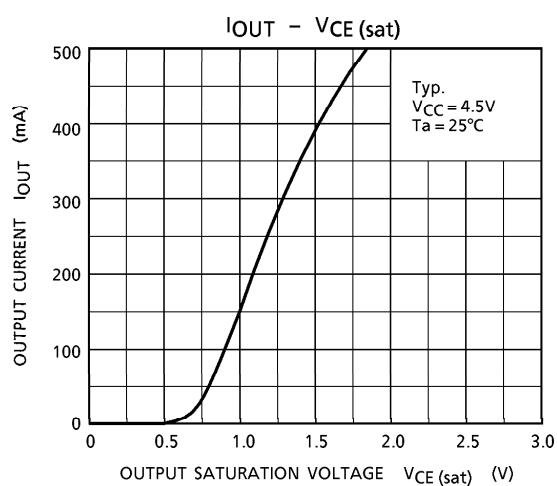
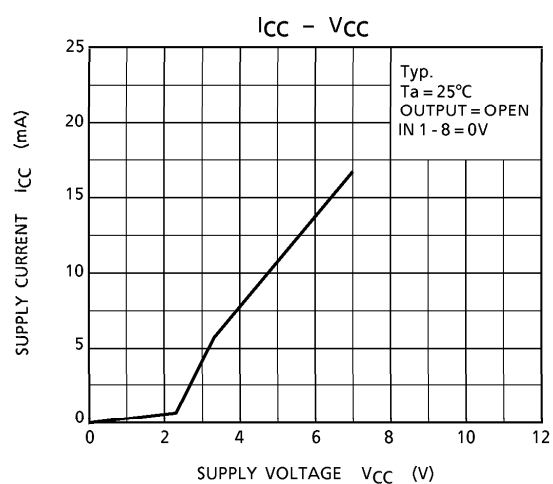
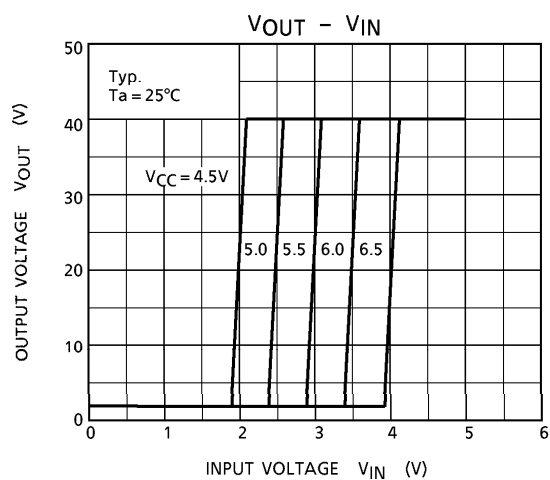
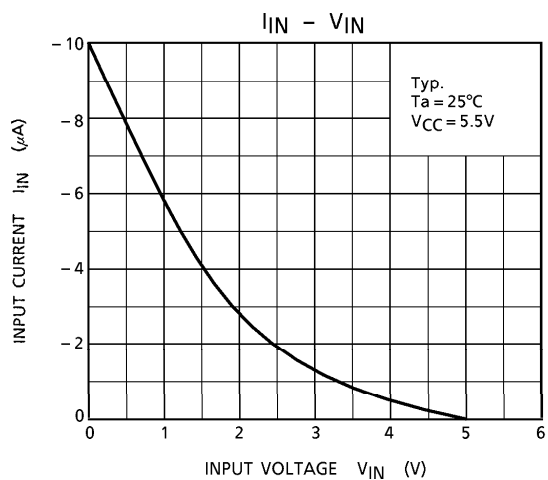
7. V_F

 8. I_{CC}

 9. t_{ON} , t_{OFF}


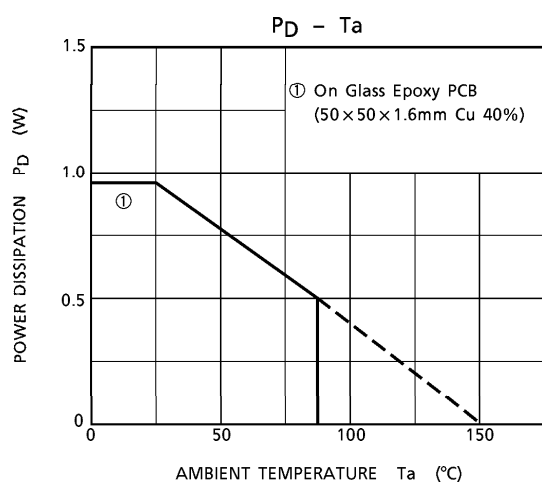
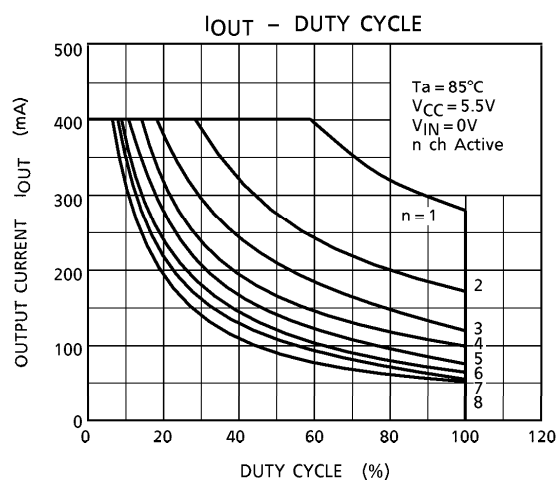
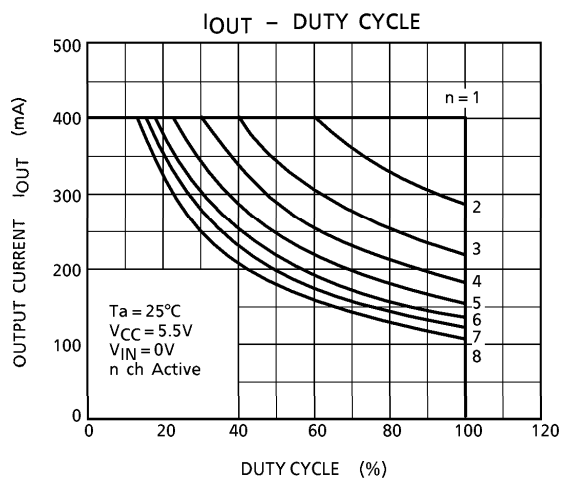
(Note 1) Pulse Width $50\mu s$, Duty Cycle 10%
Output Impedance 50Ω , $t_r \leq 5ns$, $t_f \leq 10ns$

(Note 2) C_L includes probe and jig capacitance.

PRECAUTIONS for USING

Utmost care is necessary in the design of the output line, V_{CC} , COMMON and GND line since IC may be destroyed due to short-circuit between outputs, air contamination fault, or fault by improper grounding.

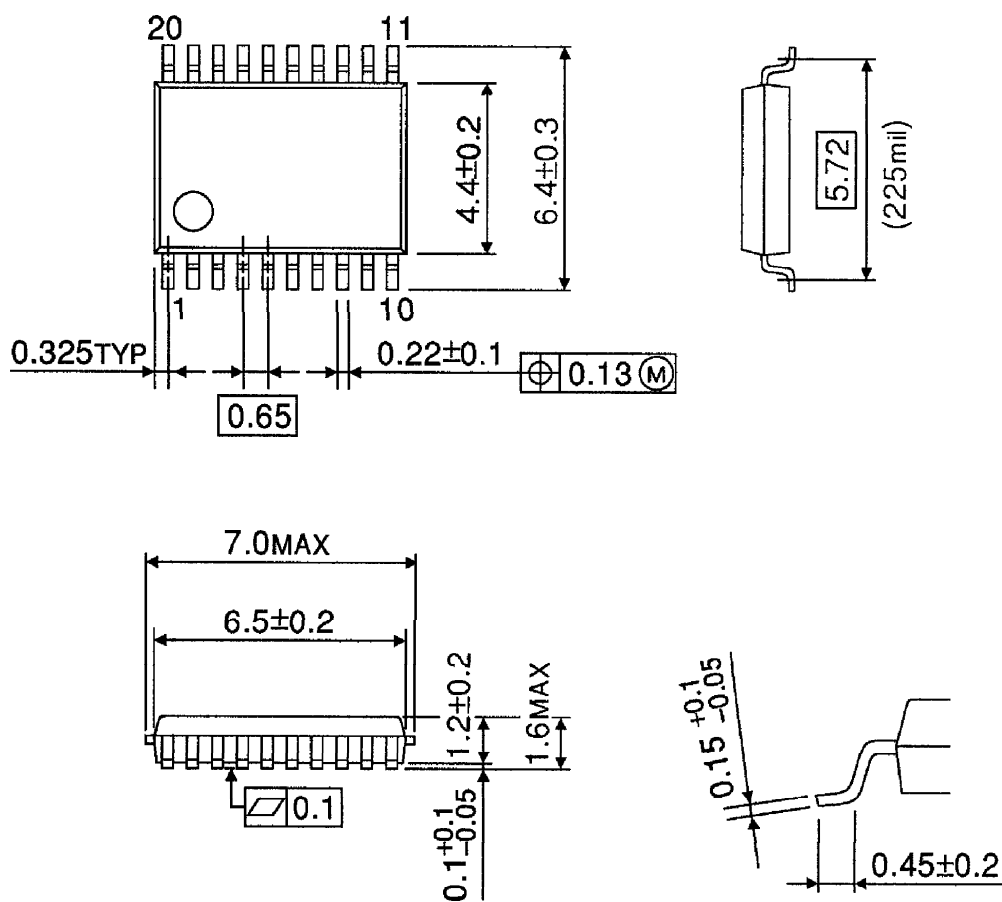




OUTLINE DRAWING

SSOP20-P-225-0.65A

Unit : mm



Weight : 0.09g (Typ.)