

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
B	REVISED PER ECN# T-9604	88 FEB 17	Z. TEMAN
C	REVISED AND REDRAWN ON CAD PER ECN# T-16516	91 JUL 25	Z.TEMAN
D	REVISED AND REDRAWN ON CAD PER ECN# T-30838	02 APR 26	M. HIGGY

NOTES:


1 PART DESCRIPTION: BRAID TERMINATOR ASSEMBLY

A. MATERIAL:

1. INSULATION SLEEVE: HEAT SHRINKABLE POLYVINYLDENE FLUORIDE
2. SOLDER RING: COMPOSITION Sn63 PER QQ-S-571
3. TERMINATOR SHELL: BRASS ALLOY PER ASTM B16
4. INSERT: IMMERSION RESISTANT THERMOPLASTIC

B. FINISH:

1. TERMINATOR SHELL: SOLDER PLATED PER MIL-P-81728A
OVER NICKEL PER QQ-N-290

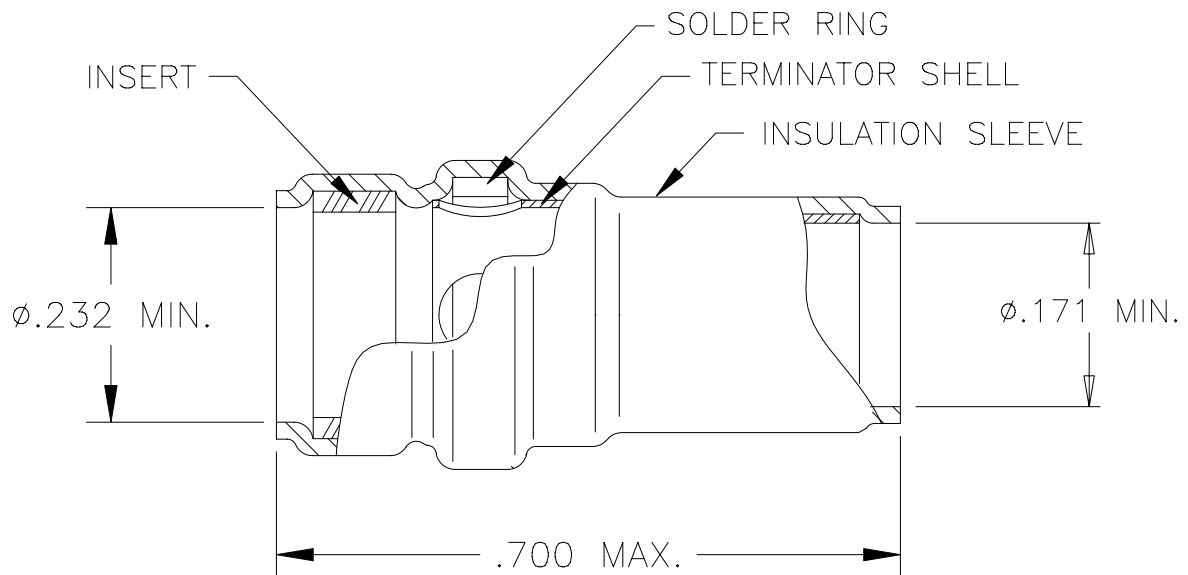

SPECIFICATION CONTROL DRAWING

If this document is printed it becomes uncontrolled.
Check for the latest revision.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE IN BRACKETS. DECIMALS .XXX ± ____ .XX ± ____ ANGLES .X ± ____	REDRAWN	terry	DATE	85 SEPT 30	tyco Electronics	Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA. 94025 U.S.A.	Raychem	
	CHECKED	J.B.K.	DATE	91 JUL 22				
	APPROVED		DATE		TITLE BRAID TERMINATOR ASSEMBLY WITH SEAL			
	APPROVED	Z.E.T.	DATE	91 JUL 25				
	CAD NAME T30838							
WEIGHT ____ lbs (____ lbs)	THIRD ANGLE PROJECTION				SIZE	CODE IDENT. NO.	DWG. NO.	REV
					A	06090	D-600-0030	D
DO NOT SCALE THIS DRAWING						SHEET 1 OF 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[D-600-0030](#)