


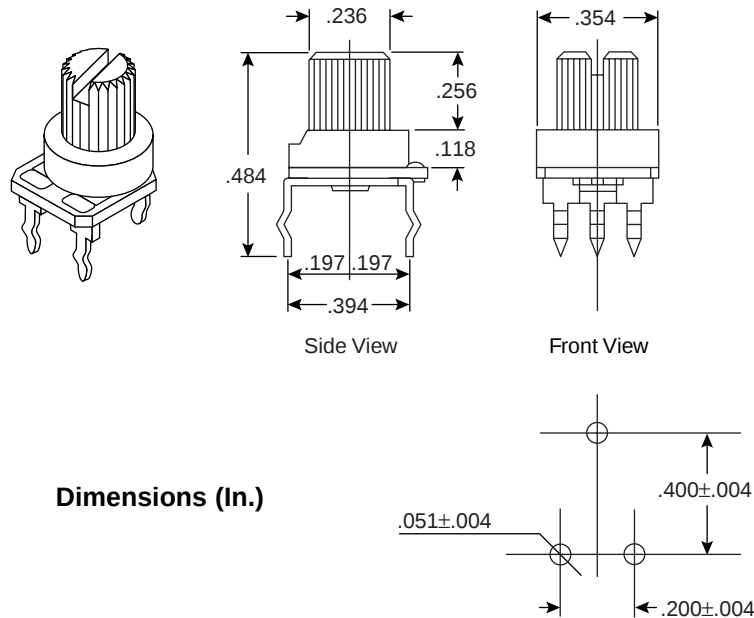

Specifications:

- Type: 9mm single turn cermet
- End stop strength: 1KgF-cm min.
- Starting torque: 35mNm max.
- Mechanical adjustment: 1 turn-260° nominal
- Weight: 0.8gms
- Adjustment shaft material: polyamide type 6 nylon
- STD resistance tolerance: $\pm 20\%$
- End resistance: 2%
- Wiper current: 50mA max.
- Power rating: .5W @ 70°C derating to zero @ 100°C
- Max working voltage: 200VDC or AC RMS, max.
- Rotational noise (CRV): 3% max.
- Temperature coefficient: ± 250 ppm/°C max.
- Temperature range: -25°C to +100°C
- Rotational life: 100 cycles min.
- Load life @ 70°C: ΔR 5% after 1000 hrs.
- Soldering time: 350°C $\pm$ 10°C 3 sec max.
- Sealing: dust proof
- Values: 500, 1K, 5K, 10K, 20K, 50K, 100K, 1M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

[409HS-10K](#) [409HS-200](#) [409HS-2K](#) [409HS-1K](#) [409HS-20K](#) [409HS-5K](#) [409HS-50K](#) [409HS-100K](#) [409HS-1MEG](#)
[409HS-500R](#) [409HS 500K](#)