

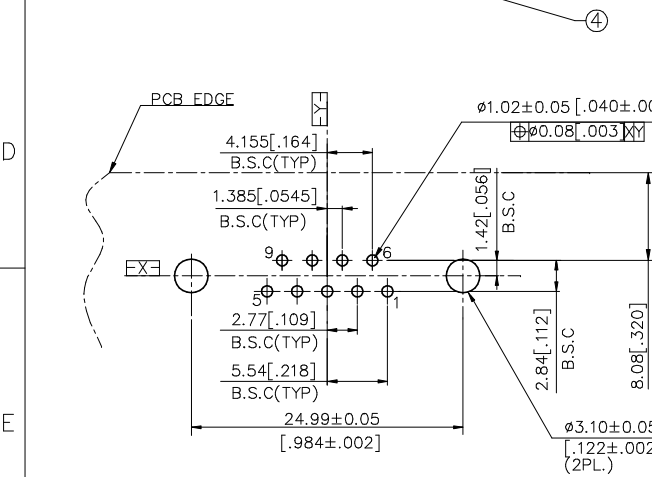
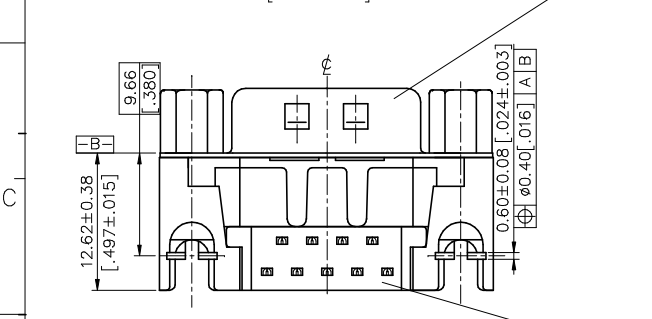
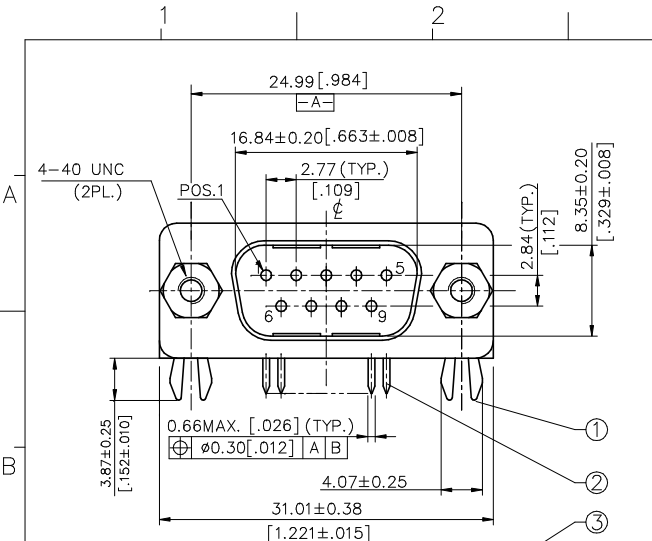
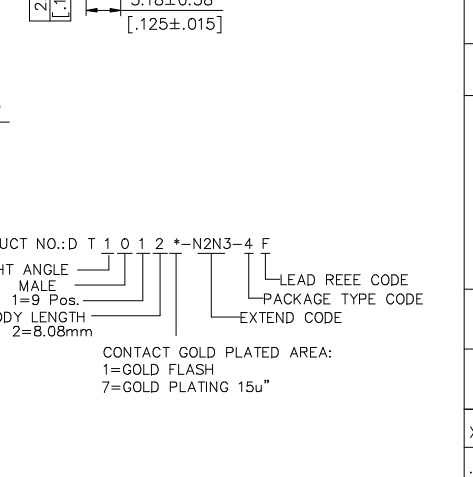


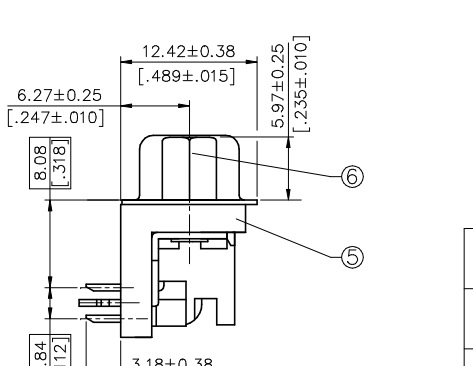

LAYOUT (COMPONENT SIDE VIEW)

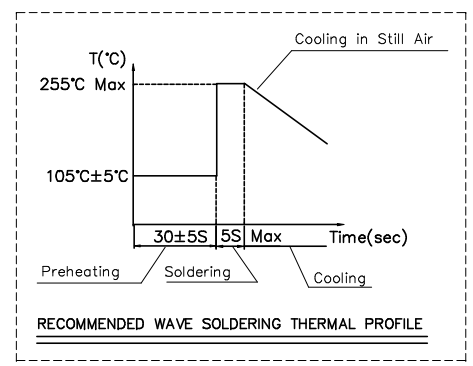

NOTES:

- HOOK ACCEPT P.C.B. THICKNESS 1.57 ± 0.08 [0.062±0.003]
- SPECIFICATION:
 - ELECTRICAL CHARACTERISTICS:
 - CONTACT CURRENT RATING: 2 AMPERES .
 - CONTACT RESISTANCE: 30 milliohms (MAX.).
 - INSULATION RESISTANCE: 5000 Megohms (MIN).
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC (MIN).
 - MECHANICAL CHARACTERISTICS:
 - CONTACT RETENTION FORCE: 1.82 Kgf MIN.
 - OPERATING TEMPERATURE: -55 °C TO +105 °C
 - DURABILITY: 500 CYCLES.
 - FOXNUT IS AN INTEGRAL PART THAT COULDN'T BE SCREWED OFF.
- "RoHS" COMPLIANT.

6	FOXNUT	2	ZINC	NICKEL PLATED	
5	HOUSING	1	THERMOPLASTIC UL 94V-0	MOLDED TEAL 322C	
4	SPACER	1	THERMOPLASTIC UL 94V-0	MOLDED TEAL 322C	
3	SHELL	1	STEEL	TIN PLATED	
2	CONTACT	9	COPPER ALLOY	GOLD PLATING AT CONTACT AREA, 100- 200u" TIN ALLOY (LEAD FREE) PLATED AT TAIL, OVER 50u" NICKEL OVERALL	
1	BOARD LOCK	2	STEEL	TIN PLATED	
ITEM	DESC.	Q'TY	MATERIAL	TREATMENT	REMARK
x.±	x°±	UNITS: mm [INCH]	NAME (INTENDED USE)	FOXCONN HON HAI PRECISION IND. CO., LTD. TAIPEI, TAIWAN, R.O.C.	
.x ±	.x° ±	MAT'L	CUSTOMER		
.xx ± ^{0.30} [0.012]	.xx° ±	N/A	PART NO. (INTENDED USE)	TITLE: DYNASTY "D" MALE P/M R/A .318	
.xxx ±	.xxx° ±	FINISH	DT1012*-N2N3-4F	APPD: Adward Zheng 12/10'11	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON HAI PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON HAI PRECISION IND. CO., LTD.			Q'TY	N/A	DWG NO.: 301-0000-2251
			CHKD: Radar Sun 12/10'11	DR: D.J Zheng 12/10'11	SCALE SHEET REV. 1:1 1/1 D