



F

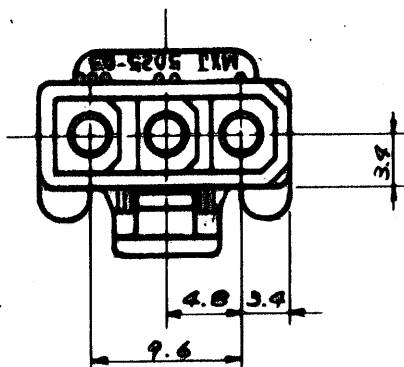


E


D

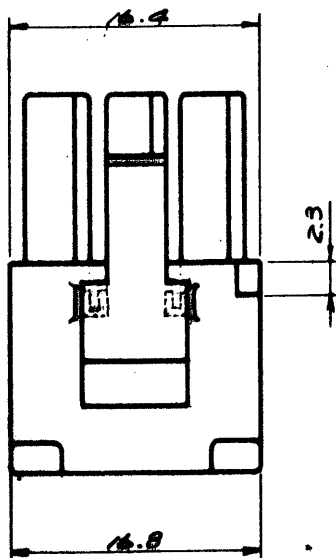

C

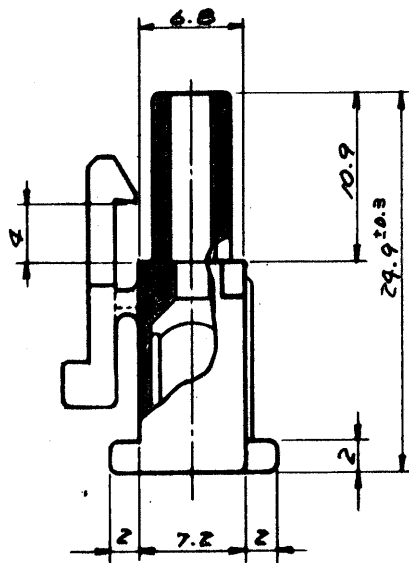

B



A

GENERAL TOLERANCES

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGLE	±3°

公差 (Tolerances)		所要数 (Req)	DRWG. <i>Y. Awano</i> 10/17/77 DSN'D <i>M. ENDO</i> 10/17/77 CHK'D <i>(signature)</i> APP'D
.000 → ±0.005 .00 → ±0.05 .0 → ±0.1 . → ±0.3			
材料 (MAT'L)		MOLEX-JAPAN CO., LTD. 日本モレックス株式会社	
NYLON66, 94V-2			
熱処理 (H.T.)		No. SD-5025-03R1	
HRc			
仕上げ (Finish)		REV. D	
Scale 1		名称 (Name) MINI. FIT CONN. 3POS. RECEPTACLE HSG.	
記号 (LTR)	変更内容 (Rev.)	Date	Name

D	ロケット型 HSG. NO. 1486	11/1/77	K.H.
C	REMOVED "K" HSG. NO. 748	7/12/77	K.H.
B ₁	ロケット型 HSG.	7/12/77	K.H.
B	リフト、カーキット NO.	10/17/77	K.H.
A	REVISED	11/5/77	K.H.
O	PROPOSED	9/17/77	K.H.

5

4

3

2

1

F





E

D

C

B

A

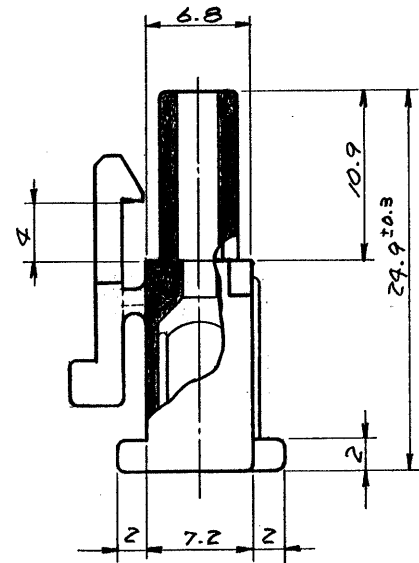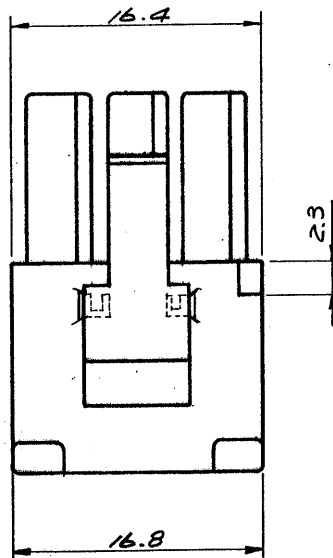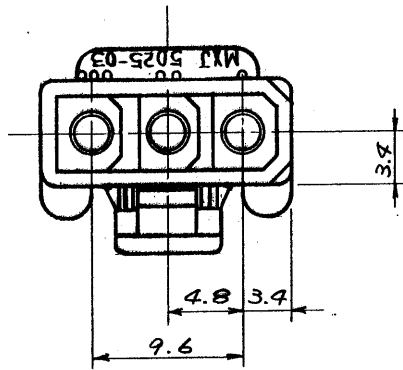

一般公差

10未満	±0.2
10以上30未満	±0.25
30以上	±0.3
角度	±3°

公差 (Tolerances)		所要数 (Req)		DRWG. <i>Y. Amano</i> 10/17/77	
.000 → ±0.005 .00 → ±0.05		MOLEX-JAPAN CO., LTD. 日本モレックス株式会社		DSN'D <i>M. ENDO</i> 10/17/77	
.0 → ±0.1 . → ±0.3				CHK'D <i>Ke Sline</i>	
材料 (MAT'L)		APP'D <i>W. H. S.</i>		REV. <i>D</i>	
NYLON66, 94V-2		No. SD-5025-03R1		REV. <i>D</i>	
熱処理 (H.T.)		名称 (Name) MINI. FIT CONN.			
HRc		3POS. RECEPTACLE HSG.			
仕上げ (Finish)		Scale 1			
記号 (LTR)		変更内容 (Rev.)			
Date		Name			

D	ロッキング支柱 ECN.NO. 1486	11/21/79	K.H.
C	REMOVED "X" ECN.NO. 748	3/8/78	<i>Y. Amano</i>
B ₁	ロッキングレブ	2/13/78	<i>Y. Amano</i>
B	リブ, サーキット No.	1/30/77	<i>Y. Amano</i>
A	REVISED	1/15/77	<i>Y. Amano</i>
O	PROPOSED	10/17/77	<i>Y. Amano</i>