


Specifications

- * Due to ongoing technological advances, consult factory for certification specifics.

Figure 1 shows the dimensions of the 100-pin connector in four views:

- Front View (Top Left):**
 - Top width: .825 [20.95]
 - Top width (inner): .125 [3.18]
 - Left side height: .080 [2.03]
 - Left side height (total): .677 [17.20]
 - Right side height: .892 [22.66]
 - Bottom width: .843 [21.41]
 - Bottom width (inner): .080 SOLDER LUG
 - Feature: HIGH BARRIER OPTION
- Side View (Top Right):**
 - Top width: .590 [14.98]
 - Top width (inner): .380 [9.65]
 - Left side height: .877 [22.27]
 - Bottom width: .505 [12.83]
 - Feature: P.C. (option 2)
- Rear View (Bottom Left):**
 - Top width: .825 [20.95]
 - Bottom height: 1.040 [26.42]
 - Feature: TAB
- Side View (Bottom Right):**
 - Top width: .590 [14.98]
 - Top width (inner): .380 [9.65]
 - Left side height: .730 [18.54]
 - Right side height: .920 [23.36]
 - Bottom width: .507 [12.88]
 - Feature: P.C. (option 7,8)

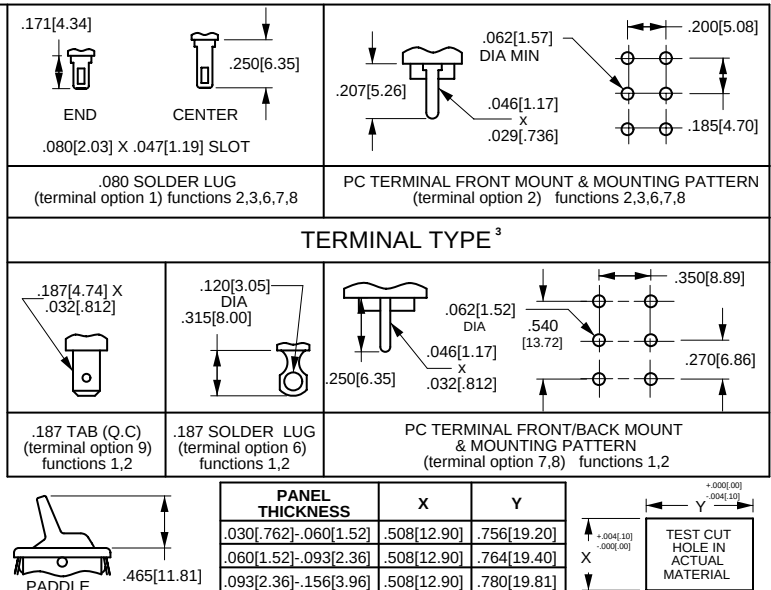

6 **21** **1** **5** **9** **1** **9** **-** **0** **-** **9** **-** **V**

SERIES **ACTUATOR STYLE** **BASE/ACTUATOR COLOR¹** **RATING²** **TERMINATION⁴** **ROCKER FACE LEGEND**

6 **11** PADDLE **1** BASE **21** CURVED ROCKER **2** BLACK **4** WHITE **5** WHITE **ACTUATOR** **BLACK** **WHITE** **BLACK** **WHITE**

POLES **1** SINGLE POLE **2** DOUBLE POLE **5** DOUBLE POLE W/ HIGH BARRIERS **6** SINGLE POLE W/ HIGH BARRIERS

1 .4VA MAX @20V MAX (AC/DC) **2** 2A 250VAC 5A 125VAC RESISTIVE **3** 11A 125VAC H³ **4** 4A 250 VAC 8A 125VAC **9** 4A 250VAC 8A 125VAC INDUCTIVE **6(4)A** 250VAC T85°

FUNCTION **1** ON-NONE-OFF

1 .080 SOLDER LUG **2** PC TERM **3** WIRE LEAD⁷ **4** WIRE LEAD **6** .187 SOLDER LUG **7** PC BACK MOUNT **8** PC FRONT MOUNT **9** .187TAB (QC)

EPOXY SEALED TERMINALS **E** EPOXY **0** NONE REQUIRED

MOLDED-IN⁵ **0** NO LEGEND **ON-OFF (VERTICAL)** **ON-OFF (HORIZONTAL)** **8** I-O (HORIZONTAL) **9** I-O (VERTICAL) **●** (indicates ON) (ON ROCKER RADIUS)

TRANSFER STAMP⁶ **0** **A** **B** **D** **E** **F**

8 Rating 9 using Termination 1 or 2 is rated T55 only.

al. **N** NOT APPLICABLE
B BLACK
V VISI-RED
W WHITE