

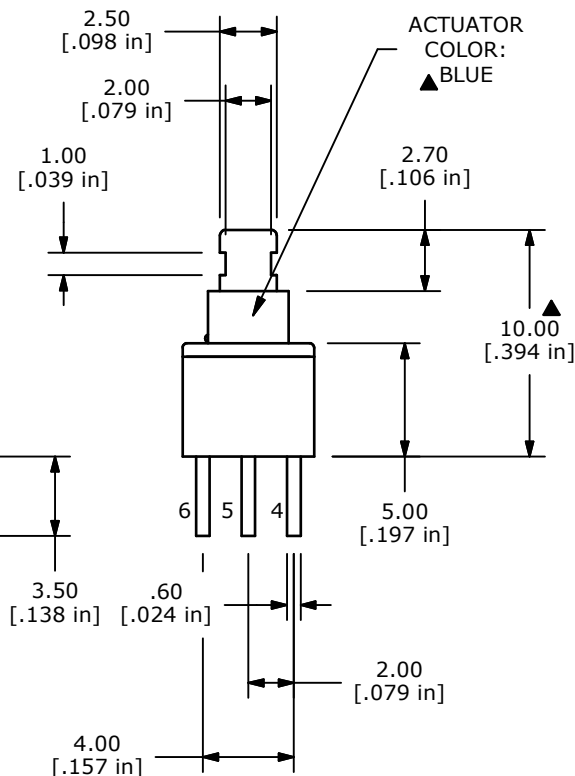

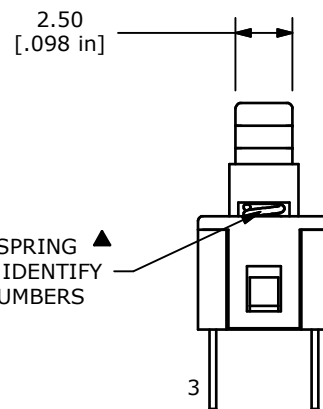


ACTUATOR SPRING
LOCATION TO IDENTIFY
TERMINAL NUMBERS

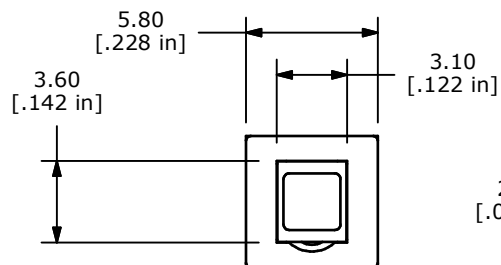

ACTUATOR
COLOR:
▲ BLUE



NOTES:

1. ALL DIMENSIONS IN mm [INCHES]
2. GENERAL TOLERANCE: x.x= ±0.4
x.xx=±.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.1A; 30V
5. CONTACT RESISTANCE: 50 MILLI-OHMS MAX INITIAL.
6. TIMING: NON-SHORTING
- ▲ 7. TRAVEL: FULL 1.8mm; 1.0 TO LOCK POSITION
8. OPERATING FORCE: 150 ± 50gf
9. ELECTRICAL LIFE: 10,000 CYCLES MAKE AND BREAK
CYCLES AT FULL LOAD
10. ▲ DENOTE CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT



TITLE TL2203EE

A	20934	New Release	12/19/12	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 4	DATE 12/17/2012	DR rc	DWG P010406	REV A
------------	--------------------	----------	----------------	----------