



The differences of external dimension between CDP-TX-02E-R and CDP-TX-02N

Circuit Design, Inc.
Engineering Div.


CDP-TX-02E-R

Antenna connector position




* 1

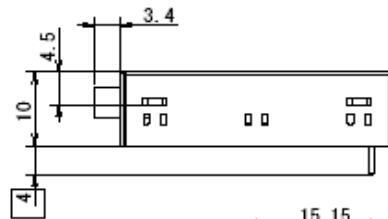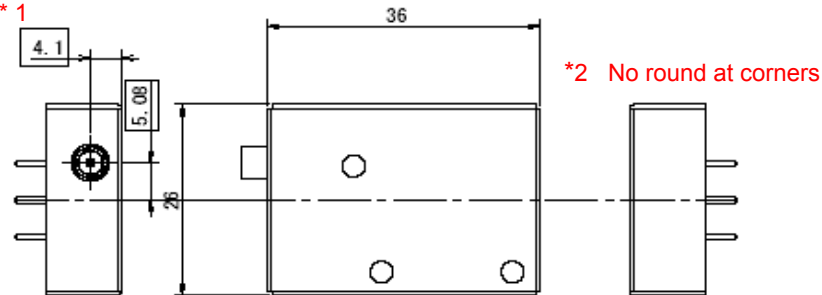




*3
The length of the pins

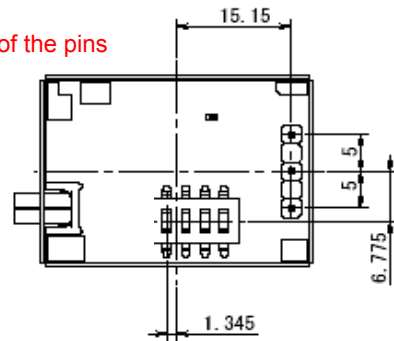

CDP-TX-02N

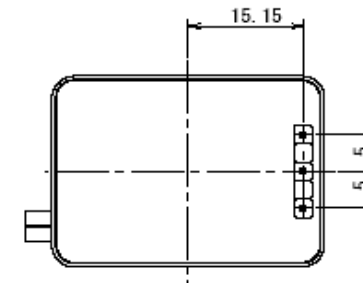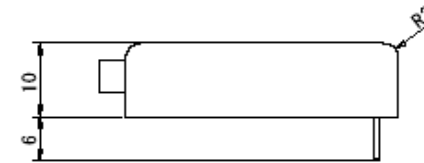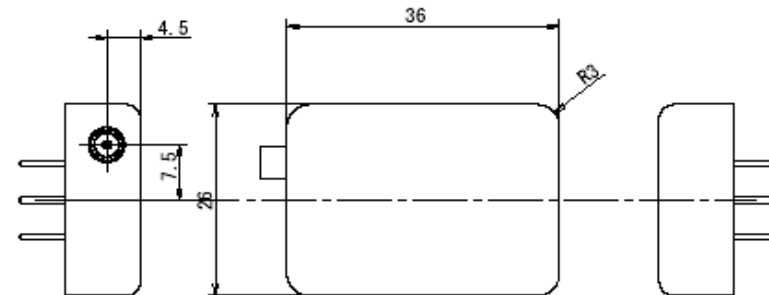

Others

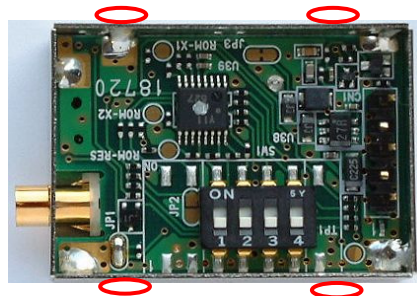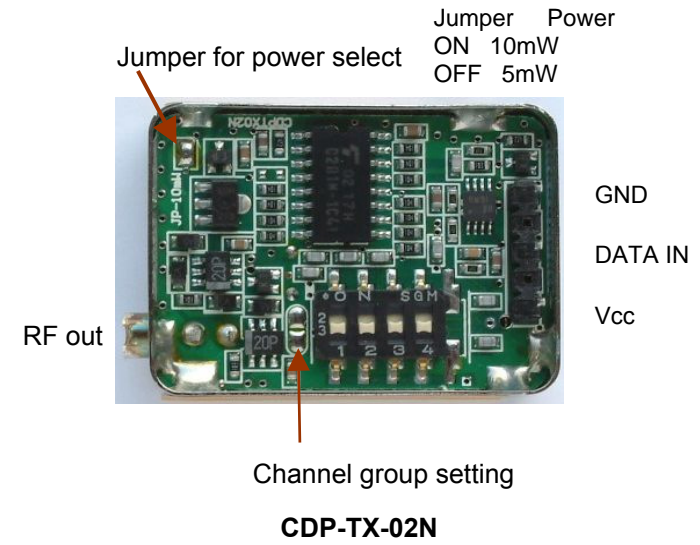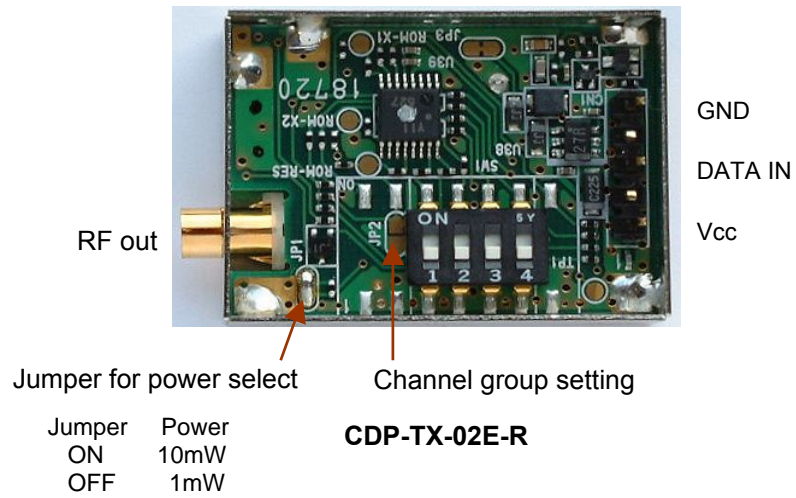


○ Soldering point

For stable module operation, It is recommended to solder the shield case to PCB wide GND (see above)


Receiver

CDP-RX-02E-R

RSSI output characteristics

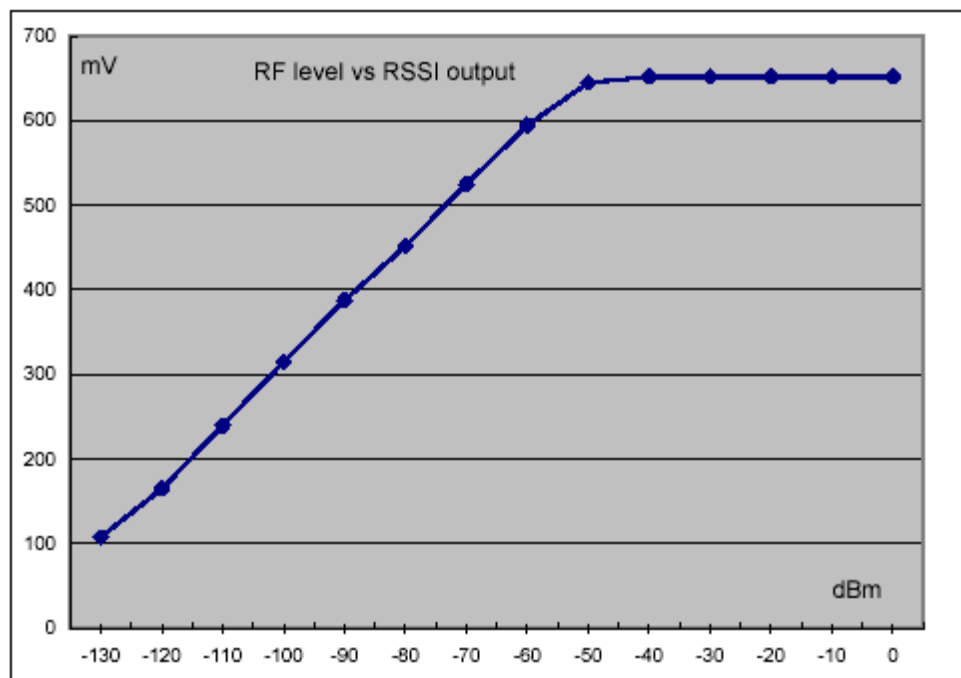

CDP-RX-02N RSSI output characteristics

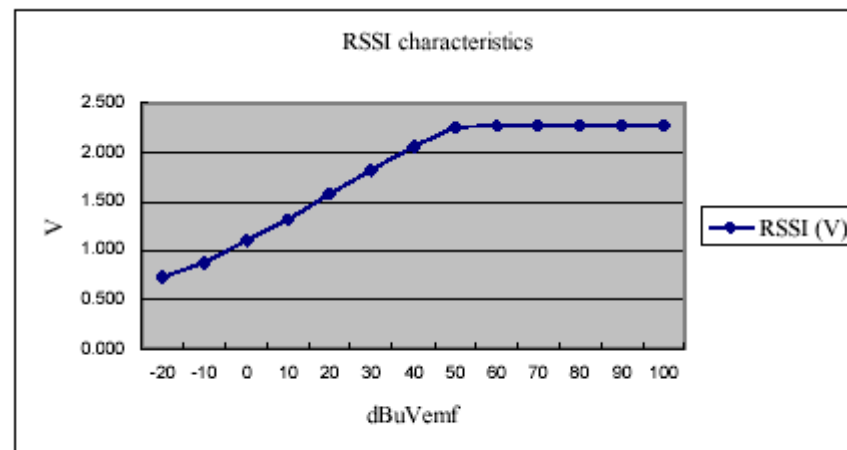

Note: 0 dBuVemf = -113dBm 50 dBuVemf = -63dBm