
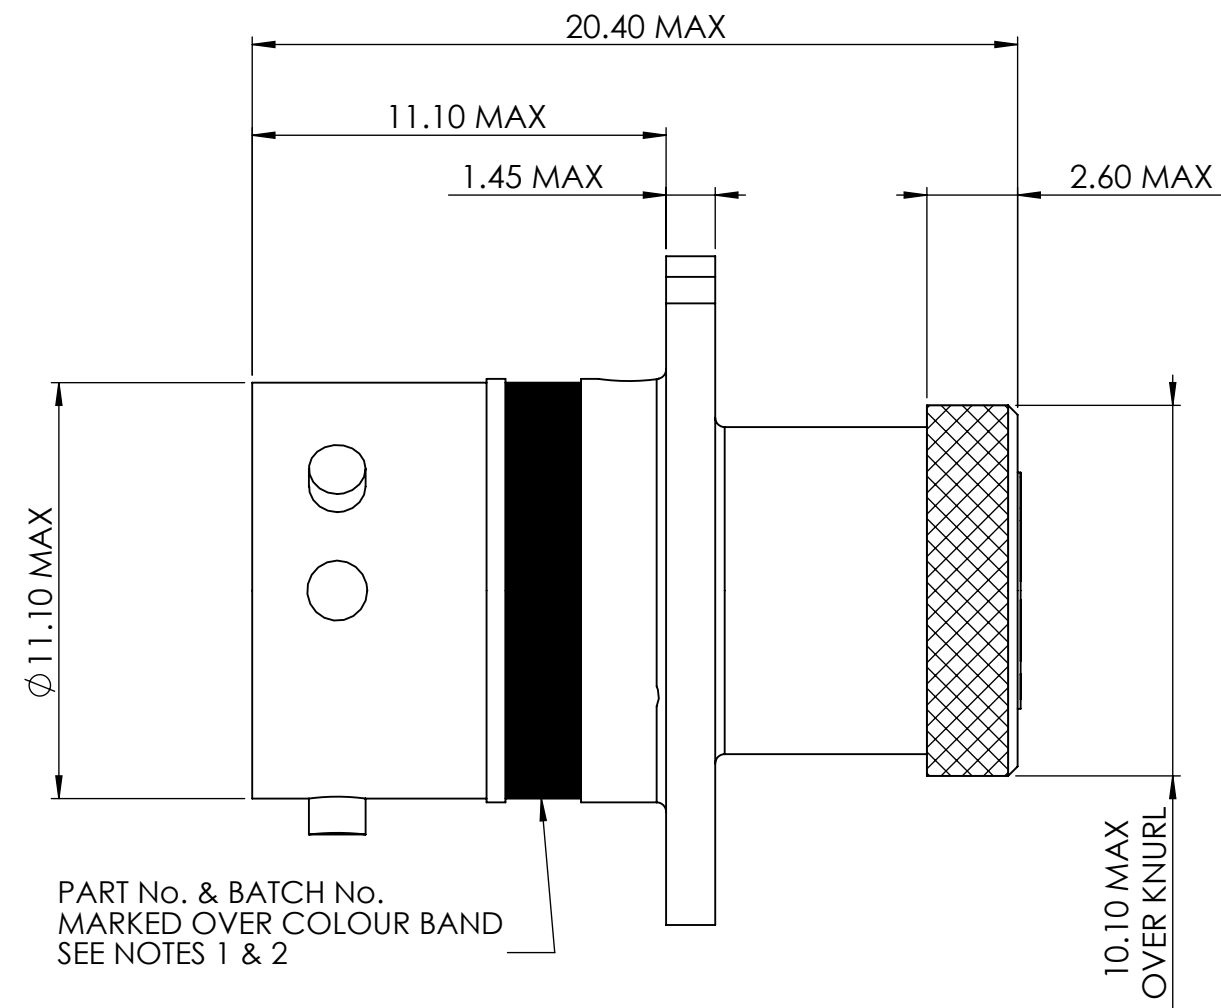


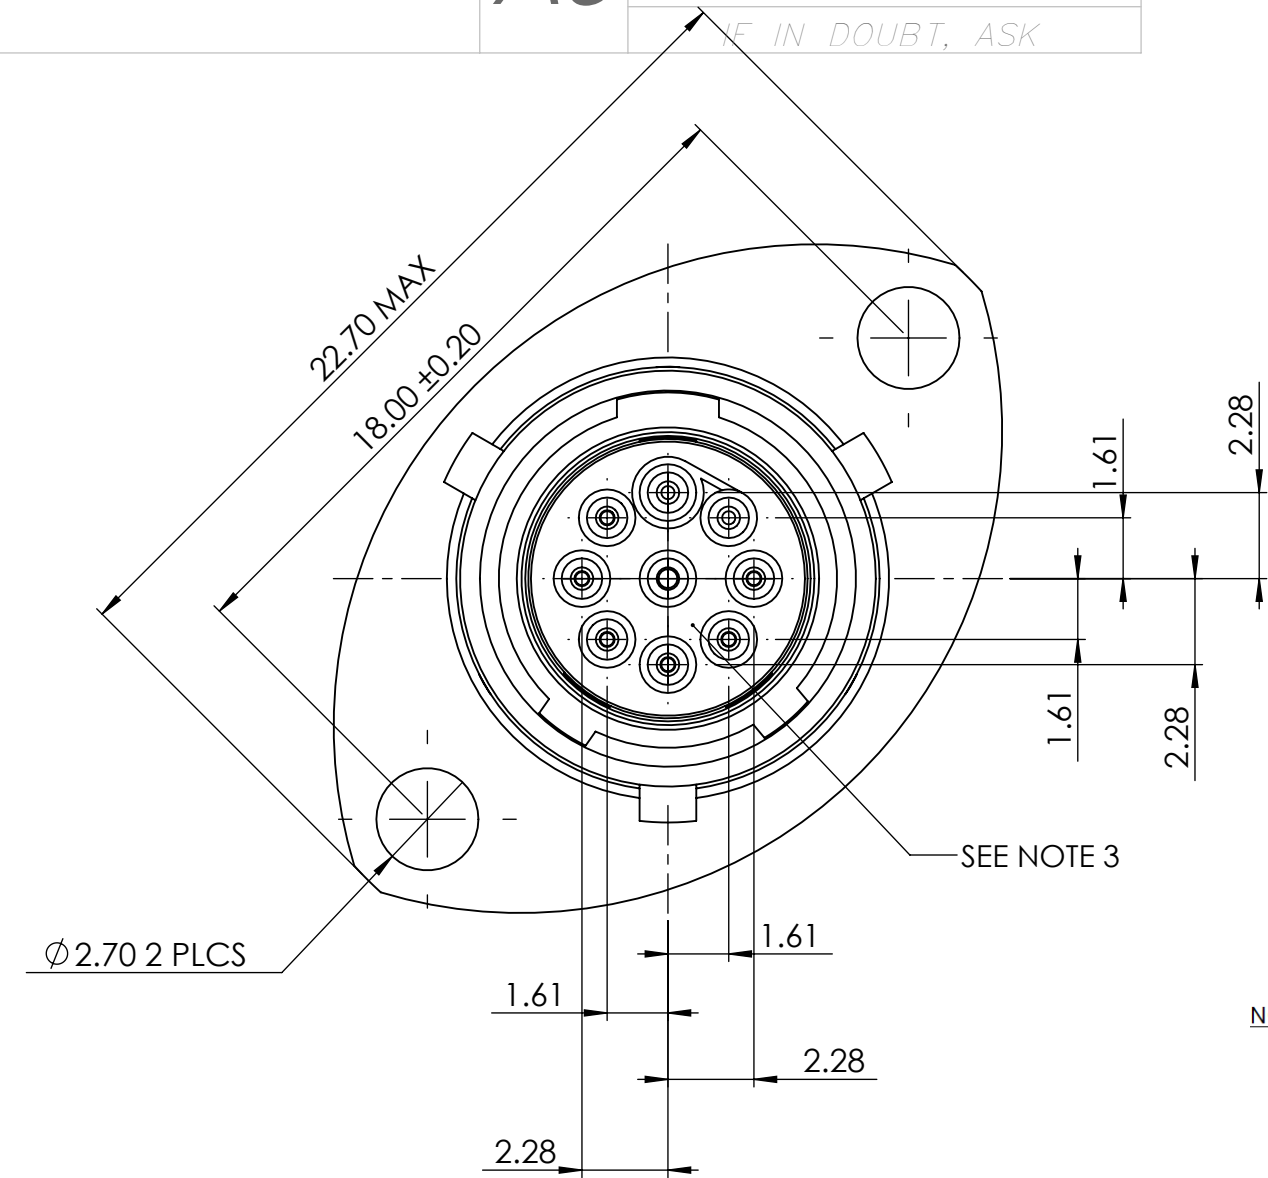

NOTES

- CONNECTOR ORIENTATION IDENTIFIED BY COLOUR BAND COLOUR APPLIED. AS BELOW.
N ORIENTATION – RED
A ORIENTATION – YELLOW
B ORIENTATION – BLUE
C ORIENTATION – ORANGE
D ORIENTATION – GREEN
E ORIENTATION – GREY
- PART NUMBER & BATCH NUMBER EXAMPLE :-
DEUTSCH ASDD006-09P/SN-HE- **** RP654321
SERIES PREFIX
STYLE (2 HOLE MOUNT PCB)
SHELL SIZE
CONTACT ARRANGEMENT
BATCH NUMBER
MOD CODE (IF REQUIRED)
HARSH ENVIRONMENT (FI = FUEL IMMERSIBLE)
ORIENTATION
CONTACT TYPE
P = PIN
S = SOCKET
- VIEW SHOWN IS PIN VERSION. CAVITY IDENTIFICATION FOR SOCKET VERSION RUNS IN OPPOSITE DIRECTION (i.e. ANTI-CLOCKWISE)

A	63442	NDL	RBC	NDL	MD	13/02/14
ISSUE	CHANGE NOTE	DRAWN	CHECKED	APP. ENG.	APP. B.U.	DATE

MATERIAL	THE COPYRIGHT OF THIS DRAWING IS RESERVED BY DEUTSCH UK. IT IS ISSUED ON CONDITION THAT IT IS NOT COPIED, REPRODUCED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE CONSENT IN WRITING OF DEUTSCH UK.	DEUTSCH ST LEONARDS ON SEA, EAST SUSSEX, TN38 9RF TEL. +44 (0)1424 852721
HEAT TREATMENT & FINISH		
PACKAGING		
APP. I.E.D	RECEIPT ASSEMBLY ASDD 9 WAY. TYPE 0. ENVELOPE DETAILS	DRAWING NUMBER 605911-ENV
SCALE 5:1		