


SAW Filters for Digital Broadcasting

SAW Filters (Up Conversion)

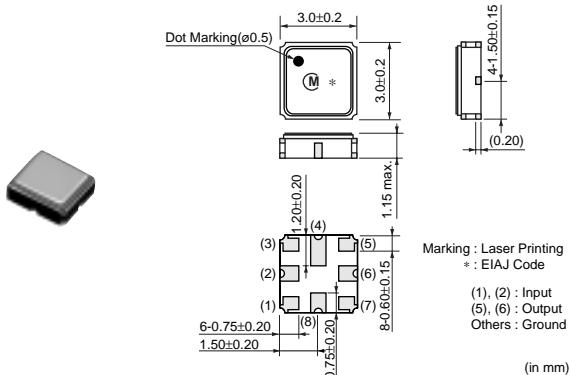

Part Number	Center Frequency (MHz)	Insertion Loss	Ripple (dB max.)	VSWR	Input Impedance	Output Impedance
SAFCD1G22CL0T02	1220	-	2.0max. (1216MHz-1224MHz)	-	-	-

⚠ Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and !CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.mitsumi.co.jp>) before to require our product specifications or to transact the approval sheet for product specifications.