


# PN100/PN100A/MMBT100/MMBT100A

## NPN General Purpose Amplifier

- This device is designed for general purpose amplifier applications at collector currents to 300mA.
- Sourced from process 10.

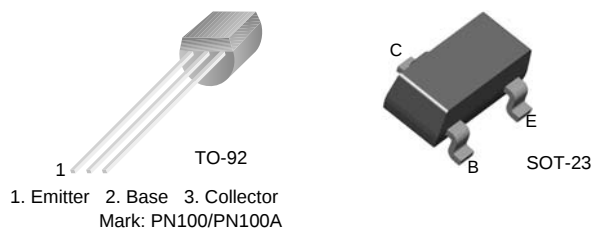

### Absolute Maximum Ratings\* $T_A = 25^\circ\text{C}$ unless otherwise noted

| Symbol         | Parameter                        | Ratings      | Units           |
|----------------|----------------------------------|--------------|-----------------|
| $V_{CEO}$      | Collector-Emitter Voltage        |              | 45              |
| $V_{CBO}$      | Collector-Base Voltage           |              | 75              |
| $V_{EBO}$      | Emitter-Base Voltage             |              | 6.0             |
| $I_C$          | Collector current                | - Continuous | 500             |
| $T_J, T_{stg}$ | Junction and Storage Temperature |              | $-55 \sim +150$ |

\* These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

#### NOTES:

1. These ratings are based on a maximum junction temperature of 150 degrees C.
2. These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

\* Pulse Test: Pulse Width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$

### Thermal Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

| Symbol          | Parameter                                                   | Max.            |                       | Units                      |
|-----------------|-------------------------------------------------------------|-----------------|-----------------------|----------------------------|
|                 |                                                             | PN100<br>PN100A | *MMBT100<br>*MMBT100A |                            |
| $P_D$           | Total Device Dissipation<br>Derate above $25^\circ\text{C}$ | 625<br>5.0      | 350<br>2.8            | mW<br>mW/ $^\circ\text{C}$ |
| $R_{\theta JC}$ | Thermal Resistance, Junction to Case                        | 83.3            |                       | $^\circ\text{C}/\text{W}$  |
| $R_{\theta JA}$ | Thermal Resistance, Junction to Ambient                     | 200             | 357                   | $^\circ\text{C}/\text{W}$  |

\* Device mounted on FR-4 PCB  $1.6'' \times 1.6'' \times 0.06''$

**Electrical Characteristics**  $T_C=25^{\circ}\text{C}$  unless otherwise noted

| Symbol                              | Parameter                             | Test Condition                                                                                                                                                                            | Min.                                      | Max.                                                | Units    |
|-------------------------------------|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|-----------------------------------------------------|----------|
| <b>Off Characteristics</b>          |                                       |                                                                                                                                                                                           |                                           |                                                     |          |
| $BV_{CBO}$                          | Collector-Base Breakdown Voltage      | $I_C = 10\mu\text{A}, I_E = 0$                                                                                                                                                            | 75                                        |                                                     | V        |
| $BV_{CEO}$                          | Collector-Emitter Breakdown Voltage * | $I_C = 1\text{mA}, I_B = 0$                                                                                                                                                               | 45                                        |                                                     | V        |
| $BV_{EBO}$                          | Emitter-Base Breakdown Voltage        | $I_E = 10\mu\text{A}, I_C = 0$                                                                                                                                                            | 6.0                                       |                                                     | V        |
| $I_{CBO}$                           | Collector-Base Cutoff Current         | $V_{CB} = 60\text{V}$                                                                                                                                                                     |                                           | 50                                                  | nA       |
| $I_{CES}$                           | Collector-Emitter Cutoff Current      | $V_{CE} = 40\text{V}$                                                                                                                                                                     |                                           | 50                                                  | nA       |
| $I_{EBO}$                           | Emitter Cutoff Current                | $V_{EB} = 4\text{V}$                                                                                                                                                                      |                                           | 50                                                  | nA       |
| <b>On Characteristics</b>           |                                       |                                                                                                                                                                                           |                                           |                                                     |          |
| $h_{FE}$                            | DC Current Gain                       | $I_C = 100\mu\text{A}, V_{CE} = 1.0\text{V}$<br>$I_C = 10\text{mA}, V_{CE} = 1.0\text{V}$<br>$I_C = 100\text{mA}, V_{CE} = 1.0\text{V}^*$<br>$I_C = 150\text{mA}, V_{CE} = 5.0\text{V}^*$ | 100<br>100A<br>100<br>100A<br>100<br>100A | 80<br>240<br>100<br>300<br>100<br>100<br>350<br>100 |          |
| $V_{CE(sat)}$                       | Collector-Emitter Saturation Voltage  | $I_C = 10\text{mA}, I_B = 1.0\text{mA}$<br>$I_C = 200\text{mA}, I_B = 20\text{mA}$                                                                                                        |                                           | 0.2<br>0.4                                          | V<br>V   |
| $V_{BE(sat)}$                       | Base-Emitter Saturation Voltage       | $I_C = 10\text{mA}, I_B = 1.0\text{mA}$<br>$I_C = 200\text{mA}, I_B = 20\text{mA}$                                                                                                        |                                           | 0.85<br>1.0                                         | V<br>V   |
| <b>Small Signal Characteristics</b> |                                       |                                                                                                                                                                                           |                                           |                                                     |          |
| $f_T$                               | Current Gain Bandwidth Product        | $V_{CE} = 20\text{V}, I_C = 20\text{mA}$                                                                                                                                                  |                                           | 250                                                 | MHz      |
| $C_{obo}$                           | Output Capacitance                    | $V_{CB} = 5.0\text{V}, f = 1.0\text{MHz}$                                                                                                                                                 |                                           | 4.5                                                 | pF       |
| NF                                  | Noise Figure                          | $I_C = 100\mu\text{A}, V_{CE} = 5.0\text{V}$<br>$R_G = 2.0\text{k}\Omega, f = 1.0\text{KHz}$                                                                                              | 100<br>100A                               | 5.0<br>4.0                                          | dB<br>dB |

\* Pulse Test: Pulse Width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$

## Typical Characteristics

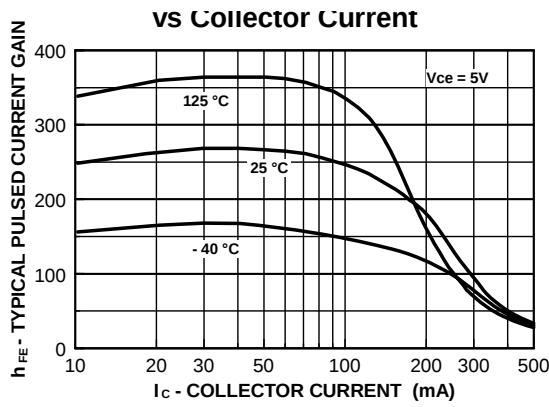


Figure 1. Typical Pulsed Current Gain vs Collector Current

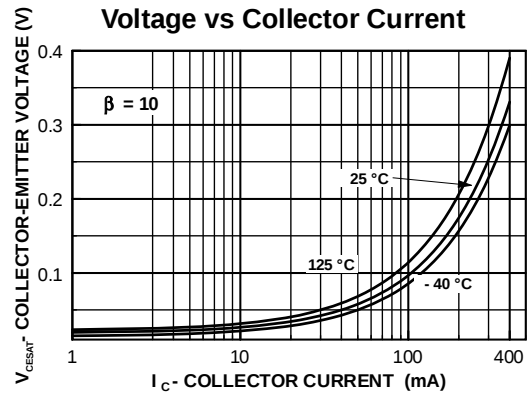


Figure 2. Collector-Emitter Saturation Voltage vs Collector Current

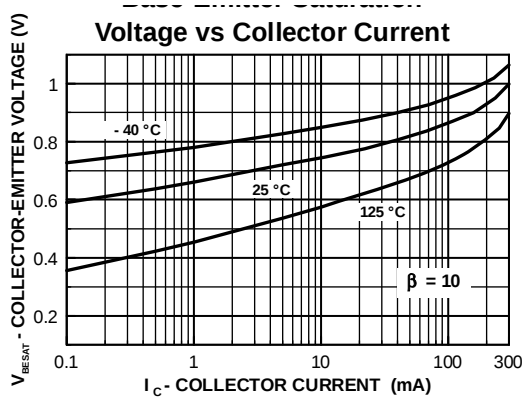


Figure 3. Base-Emitter Saturation Voltage vs Collector Current

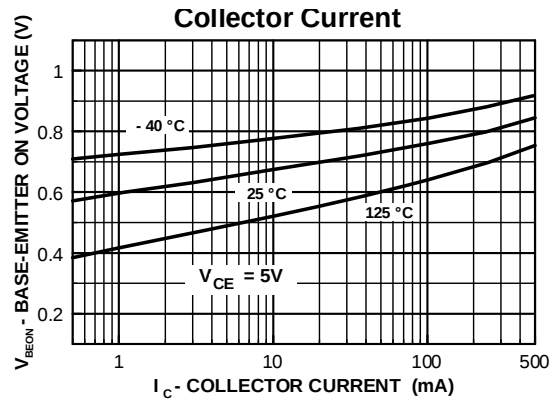


Figure 4. Base-Emitter On Voltage vs Collector Current

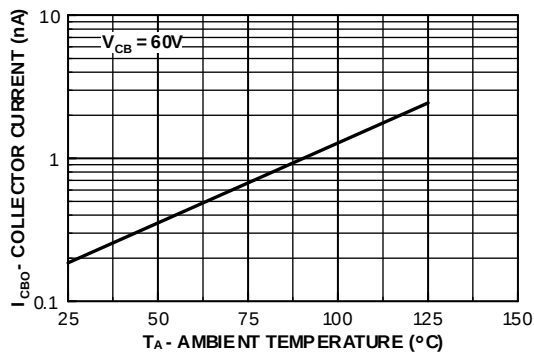


Figure 5. Collector Cutoff Current vs Ambient Temperature

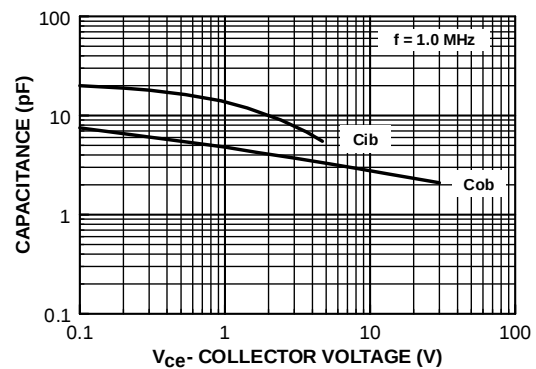


Figure 6. Input and Output Capacitance vs Reverse Voltage

## Typical Characteristics (Continued)

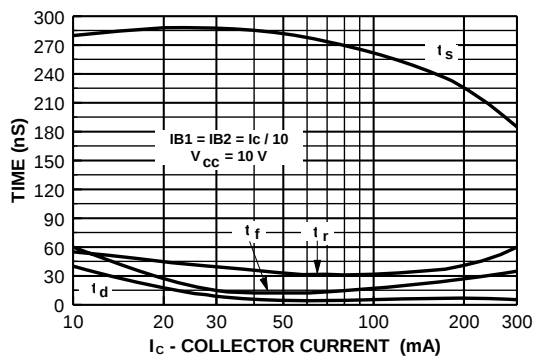


Figure 7. Switching Times vs Collector Current


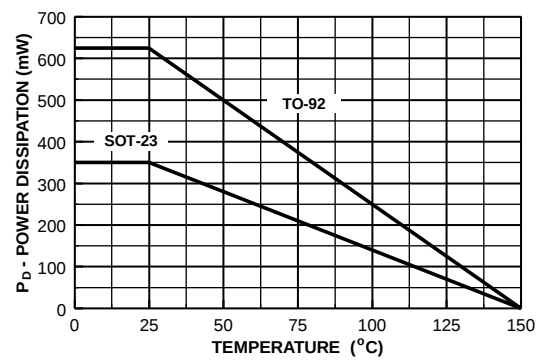


Figure 8. Power Dissipation vs Ambient Temperature

# Package Dimension (TO92)

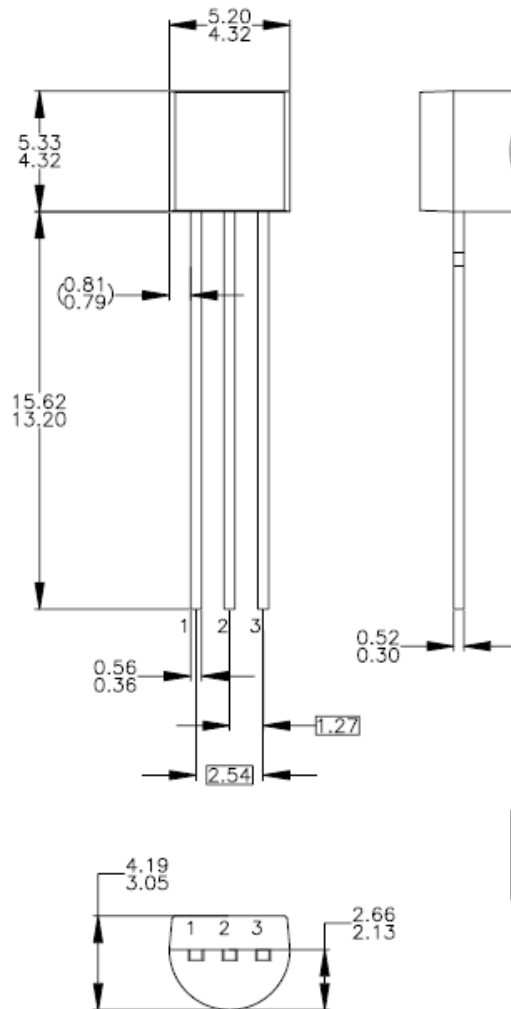

NOTES: UNLESS OTHERWISE SPECIFIED

- DRAWING WITH REFERENCE TO JEDEC TO-92 RECOMMENDATIONS.
- ALL DIMENSIONS ARE IN MILLIMETERS.
- DRAWING CONFORMS TO ASME Y14.5M-1994.
- TO-92 (92,94,96,97,98) PIN CONFIGURATION:



| PIN | 92    | 94    | 96    | 97    | 98    |
|-----|-------|-------|-------|-------|-------|
| 1   | E S S | E S S | B D G | C G D | C G D |
| 2   | B D G | C G D | E S S | B D G | E S S |
| 3   | C G D | B D G | C G D | E S S | B D G |

LEGEND:

P - BIPOLAR E - EMITTER D - DRAIN  
F - JFET B - BASE S - SOURCE  
M - DMOS C - COLLECTOR G - GATE

- FOR PACKAGE 92, 94, 96, 97 AND 98: PIN CONFIGURATION DRAIN "D" AND SOURCE "S" ARE INTERCHANGEABLE AT JFET "F" OPTION.
- DRAWING FILENAME: MKT-ZA030REV3.

## Package Dimension (SOT23)

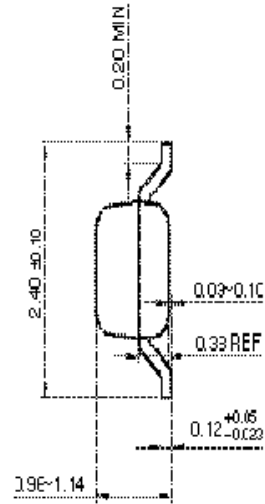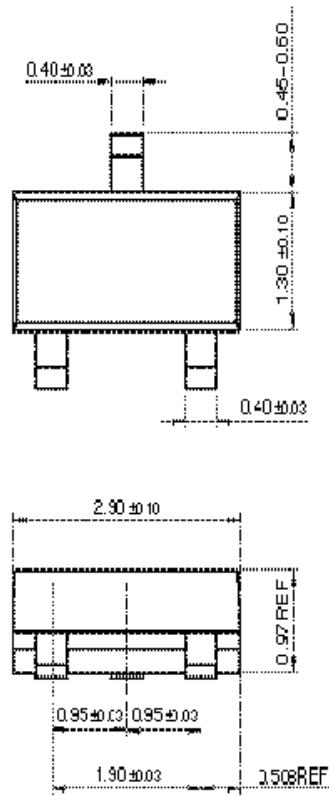



## TRADEMARKS

The following are registered and unregistered trademarks and service marks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|                                                                                   |                                                                                   |                            |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------|
| ACEx®                                                                             | Green FPS™                                                                        | Power247®                  | SuperSOT™-8                                                                         |
| Build it Now™                                                                     | Green FPS™ e-Series™                                                              | POWEREDGE®                 | SyncFET™                                                                            |
| CorePLUS™                                                                         | GTO™                                                                              | Power-SPM™                 | The Power Franchise®                                                                |
| CROSSVOLT™                                                                        | i-Lo™                                                                             | PowerTrench®               |  |
| CTL™                                                                              | IntelliMAX™                                                                       | Programmable Active Droop™ | TinyBoost™                                                                          |
| Current Transfer Logic™                                                           | ISOPANAR™                                                                         | QFET®                      | TinyBuck™                                                                           |
| EcoSPARK®                                                                         | MegaBuck™                                                                         | QS™                        | TinyLogic®                                                                          |
|  | MICROCOUPLER™                                                                     | QT Optoelectronics™        | TINYOPTO™                                                                           |
| Fairchild®                                                                        | MicroFET™                                                                         | Quiet Series™              | TinyPower™                                                                          |
| Fairchild Semiconductor®                                                          | MicroPak™                                                                         | RapidConfigure™            | TinyPWM™                                                                            |
| FACT Quiet Series™                                                                | MillerDrive™                                                                      | SMART START™               | TinyWire™                                                                           |
| FACT®                                                                             | Motion-SPM™                                                                       | SPM®                       | μSerDes™                                                                            |
| FAST®                                                                             | OPTOLOGIC®                                                                        | STEALTH™                   | UHC®                                                                                |
| FastvCore™                                                                        | OPTOPLANAR®                                                                       | SuperFET™                  | UniFET™                                                                             |
| FPS™                                                                              |  | SuperSOT™-3                | VCX™                                                                                |
| FRFET®                                                                            | PDP-SPM™                                                                          | SuperSOT™-6                |                                                                                     |
| Global Power ResourceSM                                                           | Power220®                                                                         |                            |                                                                                     |

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition                                                                                                                                                                                               |
|--------------------------|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production       | This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.                                                   |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.                                      |

Rev. I31