

# Air Cylinder Series CM2

ø20, ø25, ø32, ø40

## Longer life, increased by 50% (in-house comparison):

The cylinder's mounting and the machining accuracy of the parts have been improved. Furthermore, the shapes and the materials of the seals have been improved to enhance their wear resistance. As a result, the cylinder's life has been dramatically increased to 1.5 times that of Series CM.

## Compact and light weight:

The tube is made of stainless steel and the cover and the piston are made of aluminum. Through a compact design, it weighs 30 to 40% less than Series CM. The lateral width of the cover has been reduced approximately 10%, requiring less installation space.



## Excellent dust resistance:

A special shaped rod seal with a composite formed dust lip has been adopted. It prevents the intrusion of external dust, enabling the cylinder to be operated in unfavourable environments containing large amounts of cutting chips.



## Reduced piston rod deflection:

The clearance between the bushing and the piston rod, and between the tube and the wear ring have been decreased to achieve higher accuracy. Thus, the deflection of the piston rod has been decreased to 1/2 of Series CM.

## A tube that is resistant against external impacts:

To prevent deformation or damage caused by external impacts, a stainless tube with a thicker wall has been adopted to increase its strength. Furthermore, the strength of the support bracket has been increased.

## Easy installation:

Because the rod cover and the head cover have wide surfaces, a wrench can be placed over the cover during installation, thus facilitating installation.

## Improved installation accuracy:

The cylinder body and the mounting support bracket have been made with an even higher level of accuracy. Improving the installation accuracy simplifies the installation work and prolongs the life of the cylinder.

## High speed drive possible:

The cushion function can be selected in accordance with the drive speed condition to be used. Therefore, it can support a high-speed drive.

- Rubber bumper ..... 50 to 750mm/s (Standard equipment)

## Replaceable rod seal:







The rod seal, which is the first to wear out in a cylinder, can be replaced. This extends the life of the cylinder, and is economical. The seal can be replaced with the cylinder mounting, thus requiring less manpower.

# Air Cylinder

## Series CM2

ø20, ø25, ø32, ø40

### Variations

Series	Action	Rod	Cushion	Basic	Variation					Bore size (mm)	Page	
					With One-touch fitting	Rod boot	Air hydro	Clean series	Copper free			
<b>Standard Series CM2</b> 	Double acting	Single rod	Rubber	●	●	●	●	●	●	20 25 32 40	1.4-3	CJ1
		Double rod	Rubber	●	●	●	●	●	●		1.4-22	CJP
	Single acting	Single rod (Spring return/Spring extend)	Rubber	●	●				●		1.4-33	CJ2
<b>Non-rotating rod Series CM2K</b> 	Double acting	Single rod	Rubber	●		●			●		1.4-50	CM2
		Double rod	Rubber	●		●			●		1.4-56	C85
	Single acting	Single rod (Spring return/Spring extend)	Rubber	●					●		1.4-61	C76
<b>Direct mount style Series CM2R</b> 	Double acting	Single rod	Rubber	●			●	●	●		1.4-66	CG1
			Air	●					●			MB
<b>Direct mount/Non-rotating rod Series CM2RK</b> 	Double acting	Single rod	Rubber	●					●		1.4-73	MB1
<b>Low friction Series CM2Q</b> 	Double acting	Single rod	Rubber	●						1.4-78	1.4-83	CP95
	Double acting	Single rod	Rubber	●								C95
<b>Centralized piping Series CM2□□P</b> 	Double acting	Single rod	Rubber	●		●			●			C92
												CA1
												CS1

### Applicable auto switch

Auto switch model	Band mounting
<b>Reed switch</b>	D-C7/C8, D-C73C/C80C, D-B5/B6 D-B59W, D-A3□A, D-A44A
<b>Solid state switch</b>	D-H7□, D-H7□W, D-H7□F D-H7BAL, D-G5NTL, D-G39A/K39A

### Made to Order

Refer to p.5.4-1 for made to order specifications for series CM2.

# Standard: Double Acting Single Rod

## Series CM2

ø20, ø25, ø32, ø40

### How to Order

**Mounting**

<b>B</b>	Basic	<b>T</b>	Rear trunnion
<b>L</b>	Axial foot	<b>E</b>	Integrated clevis
<b>F</b>	Front flange	<b>BZ</b>	Boss-cut basic
<b>G</b>	Rear flange	<b>FZ</b>	Boss-cut front flange
<b>C</b>	Single clevis	<b>UZ</b>	Boss-cut front trunnion
<b>D</b>	Double clevis		
<b>U</b>	Front trunnion		

**Piping**

—	Screw-in
<b>F</b>	Built-in one-touch fitting

**Cylinder stroke**  
Refer to p.1.4-4 for Standard Stroke Table.

**Style**

—	Air cylinder
<b>H</b>	Air-hydro cylinder

**Cushion**

—	Rubber bumper
<b>A</b>	Air cushion

\* Air-hydro cylinder: rubber bumper only.

**Standard** CM2 H L 40 F — 150 A J

**With auto switch** CDM2 H L 40 F — 150 A J C73

**Bore size**

<b>20</b>	20mm
<b>25</b>	25mm
<b>32</b>	32mm
<b>40</b>	40mm

**Rod boot**

—	Without rod boot
<b>J</b>	Nylon tarpaulin
<b>K</b>	Heat resistant tarpaulin

**Number of auto switches**

—	2
<b>S</b>	1
<b>n</b>	n

**Air cylinder with auto switch**

### Applicable Auto Switches/Refer to p.5.3-2 for further information on auto switches.

Style	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Auto switch model	Lead wire* (m)				Applicable load	
					DC	AC		0.5 (—)	3 (L)	5 (Z)	None (N)		
Reed switch	—	Grommet	Yes	3 wire (NPN)	—	5V	<b>C76</b>	●	●	—	—	IC	—
					—	12V	<b>C73</b>	●	●	●	—	Relay	—
					—	100V	<b>C80</b>	●	●	—	—	PLC	—
					—	5V, 12V	<b>B53</b>	●	●	—	—	IC	—
					—	100V or less	<b>B54</b>	●	●	●	—	PLC	—
					—	12V	<b>B64</b>	●	●	—	—	Relay	—
					—	100V, 200V	<b>C73C</b>	●	●	●	—	PLC	—
					—	200V or less	<b>C80C</b>	●	●	●	—	IC	—
					—	12V	<b>A33A</b>	—	—	—	●	PLC	—
					—	24V or less	<b>A34A</b>	—	—	—	●	Relay	—
Solid state switch	—	Grommet	Yes	2 wire	—	12V	<b>A44A</b>	—	—	—	●	PLC	—
					—	100V, 200V	<b>A44A</b>	—	—	—	●	Relay	—
					—	—	<b>B59W</b>	●	●	—	—	PLC	—
					—	—	<b>H7A1</b>	●	●	—	—	IC	—
					—	—	<b>H7A2</b>	●	●	—	—	IC	—
					—	—	<b>H7B</b>	●	●	—	—	—	—
					—	—	<b>H7C</b>	●	●	—	—	—	—
					—	—	<b>G39A</b>	—	—	—	●	IC	—
					—	—	<b>K39A</b>	—	—	—	●	—	—
					—	—	<b>H7NW</b>	●	●	—	—	IC	—
					—	—	<b>H7PW</b>	●	●	—	—	IC	—
					—	—	<b>H7BW</b>	●	●	—	—	—	—
					—	—	<b>H7BA</b>	—	●	—	—	—	—
					—	—	<b>G5NT</b>	—	●	—	—	IC	—
					—	—	<b>H7NF</b>	●	●	—	—	—	—
					—	—	<b>H7LF</b>	●	●	—	—	—	—

### Auto switch

—	Without auto switch (Built-in magnet)
---	---------------------------------------

\* Refer to the left table for selecting applicable auto switches.



\* Lead wire length

0.5m : —

3m : L

5m : Z

None: N

e.g.) C80CZ, C80CN

\* Solid state switches marked with "○" are manufactured upon receipt of order.

\* Do not indicate symbol "N" for no lead wire on "D-A3□A", "A44A", "G39A" and "K39A".


# Standard: Double Acting Single Rod *Series CM2*



Integrated clevis style

## JIS symbol

Double acting/Single rod



**Made to Order**

Refer to p.5.4-1 for made to order specifications for series CM2.

## Specifications

Bore size (mm)	20	25	32	40
Style	Air cylinder			
Action	Double acting/Single rod			
Fluid	Air			
Proof pressure	1.5MPa			
Max. operating pressure	1.0MPa			
Min. operating pressure	0.05MPa			
Ambient and fluid temperature	Without auto switch: -10 to +70°C (No freezing) With auto switch: -10 to +60°C (No freezing)			
Lubrication	Non-lube			
Thread tolerance	JIS class 2			
Stroke tolerance	+1.4 0			
Piston speed	50 to 750mm/s			
Cushion	Rubber bumper			
Allowable kinetic energy	0.27J	0.4J	0.65J	1.2J

## Standard Stroke

Bore size (mm)	Standard stroke(mm) (1)	Long stroke (2) (mm)	Max. stroke (mm)
20	25, 50, 75, 100, 125, 150 200, 250, 300	400	1000
25		450	1500
32		450	2000
40		500	2000



Note 1) Other intermediate strokes can be manufactured upon receipt of order.

Note 2) Long stroke applies to the axial foot style and the front flange style. If other mounting brackets are used or the length exceeds the long stroke limit, the stroke should be selected based on the stroke selection table. (Refer to Data on p.0-21.)

## Minimum Strokes for Auto Switches Mounting

(mm)

Auto switch model	Number of switches				
	2		n		1
	On different surfaces	On the same surface	On different surfaces	On the same surface	
D-C7 D-C8	15	50	15+45 ( $\frac{n-2}{2}$ ) (n=2, 4, 6...)	50+45(n-2)	10
D-H7□ D-H7□W D-H7BAL D-H7NF	15	60		60+45(n-2)	10
D-C73C D-C80C D-H7C	15	65	15+50 ( $\frac{n-2}{2}$ ) (n=2, 4, 6...)	65+50(n-2)	10
D-H7LF	20	65	20+50 ( $\frac{n-2}{2}$ ) (n=2, 4, 6...)		10
D-B5 D-B6	15	75	15+50 ( $\frac{n-2}{2}$ ) (n=2, 4, 6...)	75+55(n-2)	10
D-B59W	20	75	20+50 ( $\frac{n-2}{2}$ ) (n=2, 4, 6...)		15
D-A3□A D-G39A D-K39A D-A44A	35	100	35+30 (n-2)	100+100(n-2)	10

## Boss-cut Style

Boss for the head cover bracket is eliminated and the total length of cylinder is shortened.



Comparison of total cylinder length with standard style (mm)

ø20	ø25	ø32	ø40
▲13	▲13	▲13	▲16

## Mounting

- Boss-cut basic (BZ)
- Boss-cut flange (FZ)
- Boss-cut trunnion (UZ)

## Rod Boot Materials

Symbol	Material	Max. ambient temp.
J	Nylon tarpaulin	70°C
K	Neoprene cloth	110°C*

\* Maximum ambient temperature for the rod boot only.

## Mounting Bracket Part No.

Bore size mm	20	25	32	40
Axial foot*	CM-L020B	CM-L032B	CM-L040B	
Flange	CM-F020B	CM-F032B	CM-F040B	
Single clevis	CM-C020B	CM-C032B	CM-C040B	
Double clevis (with pins)**	CM-D020B	CM-D032B	CM-D040B	
Trunnion (with nuts)	CM-T020B	CM-T032B	CM-T040B	

\* Two foot brackets and a mounting nut are attached.

\*\* Clevis pins and snap rings (cotter pins for bore size 40) are attached.

## Auto Switch Mounting Bracket Part No.

Auto switch model	Bore size (mm)			
	20	25	32	40
D-C7/C8 D-H7□	BM2-020	BM2-025	BM2-032	BM2-040
D-B5/B6 D-G5NTL	BA2-020	BA2-025	BA2-032	BA2-040
D-A3□A/A44A D-G39A/K39A	BM3-020	BM3-025	BM3-032	BM3-040



Note) A set of following stainless steel mounting screws is attached.  
(A switch mounting band is not attached. Please order the band separately.)

BBA3: D-B5/B6/G5  
BBA4: D-C7/C8/H7

· "D-H7BAL" switch is set on the cylinder with the screws above when shipped.

When a switch only is shipped, "BBA4" screws are attached



## Precautions

Be sure to read before handling.  
Refer to p.0-39 to 0-43 for Safety Instructions and common precautions.

## Precautions on Handling



## Warning

- ① Do not rotate the cover.
  - When installing the cylinder or screwing a pipe fitting into the port, the coupling portion of the cover could break if the cover is rotated.



## Caution

- ① Be careful with the snap ring that could fly out.
  - When replacing the rod seal, be careful with the removal of the snap ring, as the snap ring could fly out.
- ② Do not touch the cylinder during operation.
  - If the cylinder is operating at a high frequency, be aware that the cylinder tube surface could become very hot, creating the risk of burns.

# Standard: Double Acting Single Rod *Series CM2*

## Mounting Accessories

Accessories	Standard			Option			
	Mounting nut	Rod end nut	Clevis pin	Single knuckle joint	Double knuckle joint (3)	Pivot bracket	Rod boot
Basic	● (1 pc.)	●	—	●	●	—	●
Axial foot	● (2)	●	—	●	●	—	●
Front flange	● (1)	●	—	●	●	—	●
Rear flange	● (1)	●	—	●	●	—	●
Integrated clevis	—(1)	●	—	●	●	●	●
Single clevis	—(1)	●	—	●	●	—	●
Double clevis (3)	—(1)	●	●	●	●	—	●
Front trunnion	● (1) (2)	●	—	●	●	—	●
Rear trunnion	● (1) (2)	●	—	●	●	—	●
Boss-cut basic	● (1)	●	—	●	●	—	●
Boss-cut flange	● (1)	●	—	●	●	—	●
Boss-cut trunnion	● (1)	●	—	●	●	—	●
Note					With pins	With pins	



Note 1) Mounting nuts are not attached for the integrated clevis, the single clevis, and the double clevis styles.

Note 2) Trunnion nuts are attached for the front trunnion and the rear trunnion styles.

Note 3) Pins and snap rings (cotter pins for bore size 40) are attached for double clevis and the double knuckle joint.

## Weight

Bore size (mm)		(kg)			
		20	25	32	40
Basic weight	Basic	0.14	0.21	0.28	0.56
	Axial foot	0.29	0.37	0.44	0.83
	Flange	0.20	0.30	0.37	0.68
	Integrated clevis	0.12	0.19	0.27	0.52
	Single clevis	0.18	0.25	0.32	0.65
	Double clevis	0.19	0.27	0.33	0.69
	Trunnion	0.18	0.28	0.34	0.66
	Boss-cut basic	0.13	0.19	0.26	0.53
	Boss-cut flange	0.19	0.28	0.35	0.65
	Boss-cut trunnion	0.17	0.26	0.32	0.63
Additional weight by each 50 stroke		0.04	0.06	0.08	0.13
Accessory	Pivot bracket (with pins)	0.07	0.07	0.14	0.14
	Single knuckle joint	0.06	0.06	0.06	0.23
	Double knuckle joint (with pins)	0.07	0.07	0.07	0.20

Calculation example: CM2L32-100

- Basic weight:..... 0.44 (Foot, ø32)
  - Additional weight:... 0.08/50 stroke
  - Cylinder stroke:..... 100 stroke
- 0.44+0.08 X 100/50=0.60kg

## Water Resistant

CM2 **Mounting** **Bore size** **R** **Stroke** **-XC6**


● **Material of piston rod and rod end nut**

—	Carbon steel
-XC6	Stainless steel

● **Water resistant**

<b>R</b>	Seal: NBR (Nitrile rubber)
<b>V</b>	Seal: FKM (Fluorine rubber)

Ideal for use in a machine tool environment exposed to coolant mist. Also suited for use in areas in which water splashes, such as food processing equipment or car washers.

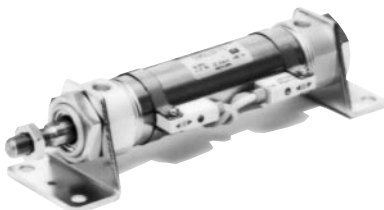


## Specifications

Action	Double acting/Single rod
Bore size	ø20, ø25, ø32, ø40
Max. operating pressure	1.0MPa
Min. operating pressure	0.05MPa
Cushion	Rubber bumper
Piping	Screw-in
Piston speed	50 to 750mm/s

\* Auto switch can be mounted.

## Dimensions

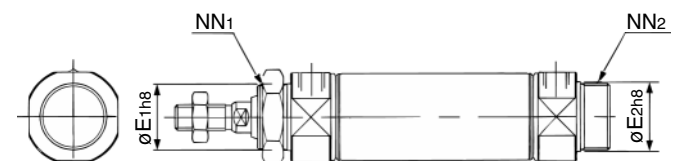

Bore size (mm)	E1	E2 *	NN1	NN2*
<b>20</b>	22 <sup>0</sup> <sub>-0.033</sub>	20 <sup>0</sup> <sub>-0.033</sub>	M22 X 1.5	M20 X 1.5

\* These dimensions and other dimensions are the same as standard style. Contact SMC for part numbers of the foot, the flange and the mounting nut for ø20.



# Series CM2

## Air-hydro

CM2H Mounting Bore size Stroke Rod boot

Air-hydro style

A low hydraulic pressure cylinder used at a pressure of 1.0MPa or below.

Through the concurrent use of a CC series air-hydro unit, it is possible to operate at a constant or low speeds or to effect an intermediate stop, just like a hydraulic unit, while using pneumatic equipment such as a valve.



### Specifications

Style	Air-hydro
Fluid	Turbine oil
Action	Double acting/Single rod
Bore size	ø20, ø25, ø32, ø40
Proof pressure	1.5MPa
Max. operating pressure	1.0MPa
Min. operating pressure	0.18MPa
Piston speed	15 to 300mm/s
Ambient and fluid temperature	+5 to +60°C
Thread tolerance	JIS class 2
Stroke tolerance	+1.4 0
Cushion	Rubber bumper (Standard equipment)
Mounting	Basic, Axial foot, Front flange, Rear flange, Single clevis, Double clevis, Front trunnion, Rear trunnion, Integrated clevis, Boss-cut

\* Auto switch can be mounted.

\* Dimensions are the same as the standard model.

- Construction: Refer to p.1.4-9
- Dimensions: Refer to p.1.4-10 to 1.4-18

## Built-in One-touch Fitting

CM2 Mounting Bore size F Stroke

Built-in One-touch fitting

A style in which One-touch fittings are built in the cylinder. It dramatically reduces the piping labour and installation space.



- Construction: Refer to p.1.4-9
- Dimensions: Refer to p.1.4-10 to 1.4-18
- Refer to p.1.4-4 for other specifications.

## With Air Cushion

CM2 Mounting Bore size Stroke A Rod boot

With air cushion

A cushion mechanism is provided on the cover at both ends to absorb the impact that is created during high speed operations. Thus, it does not transmit vibrations to the surroundings and prolongs the life of the cylinder.



### Specifications

Action	Double acting/Single rod
Bore size	ø20, ø25, ø32, ø40
Max. operating pressure	1.0MPa
Min. operating pressure	0.05MPa
Cushion	Air cushion
Piston speed	50 to 1000mm/s
Mounting	Basic, Axial foot, Front flange, Rear flange, Single clevis, Double clevis, Front trunnion, Rear trunnion, Integrated clevis, Boss-cut

\*Auto switches can be mounted.

### Allowable Kinetic Energy

Bore size (mm)	Effective cushion length (mm)	Kinetic energy absorption
20	11.0	0.54J
25	11.0	0.78J
32	11.0	1.27J
40	11.8	2.35J

- Construction: Refer to p.1.4-9
- Dimensions: Refer to p.1.4-10 to 1.4-18
- Refer to p.1.4-4 for other specifications.

### Specifications

Action	Double acting/Single rod
Bore size	ø20, ø25, ø32, ø40
Max. operating pressure	1.0MPa
Min. operating pressure	0.05MPa
Cushion	Rubber bumper
Piping	Built-in One-touch fitting
Piston speed	50 to 750mm/s
Mounting	Basic, Axial foot, Front flange, Rear flange, Single clevis, Double clevis, Front trunnion, Rear trunnion, Integrated clevis, Boss-cut

\* Auto switches can be mounted.

### Applicable Tube O.D./I.D.

Bore size (mm)	ø20	ø25	ø32	ø40
Applicable tube (mm)	ø6/4	ø6/4	ø6/4	ø8/6
Applicable tube material	Nylon, Soft nylon, Polyurethane			

### Caution

The One-touch fitting cannot be replaced.

- The One-touch fitting is press-fit into the cover and cannot be replaced.

# Standard: Double Acting Single Rod *Series CM2*

## Clean Series

10-CM2 Mounting Bore size Stroke

Clean series

The rod portion of the actuator has a double seal construction, and a relief port is provided to discharge the exhaust air directly outside of the clean room. Thus, it can be used in a Class 100 clean room.




## Specifications


Action	Double acting/Single rod
Bore size	ø20, ø25, ø32, ø40
Max. operating pressure	1.0MPa
Min. operating pressure	0.05MPa
Cushion	Rubber bumper/Air cushion
Relief port size	M5
Piston speed	30 to 400mm/s
Mounting	Basic, Axial foot, Front flange, Rear flange, Boss-cut

\* Auto switches can be mounted.

## Construction

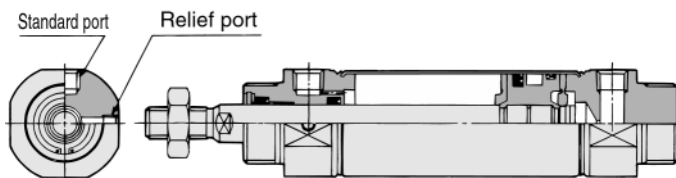

ø20, ø25

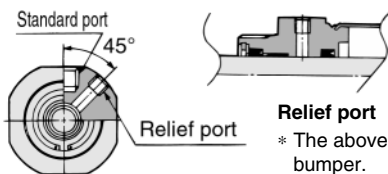

ø32, ø40

Relief port

\* The above shows the case of rubber bumper.

## Copper Free

20-CM2 Mounting Bore size Stroke

Copper free

This cylinder eliminates any influences of copper ions or fluororesins on colour CRTs. Copper materials have been nickel plated or replaced with non-copper materials to prevent the generation of copper ions.



## Specifications

Action	Double acting/Single rod	
Bore size	ø20, ø25, ø32, ø40	
Max. operating pressure	1.0MPa	
Min. operating pressure	0.05MPa	
Cushion	Rubber bumper	Air cushion
Piston speed	50 to 750mm/s	50 to 1000mm/s
Mounting	Basic, Axial foot, Front flange, Rear flange, Single clevis, Double clevis, Front trunnion, Rear trunnion, Integrated clevis, Boss-cut	

\* Auto switches can be mounted.

## Construction



CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1


CS1




# Series CM2

## Construction


### Rubber bumper

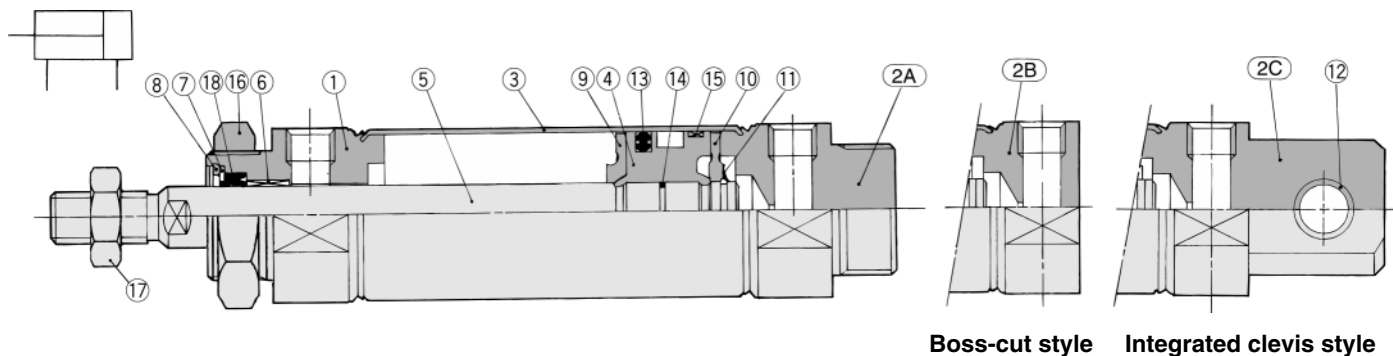


### Air-hydro

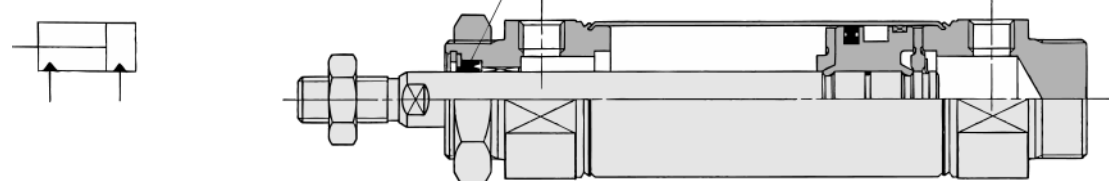

### With air cushion

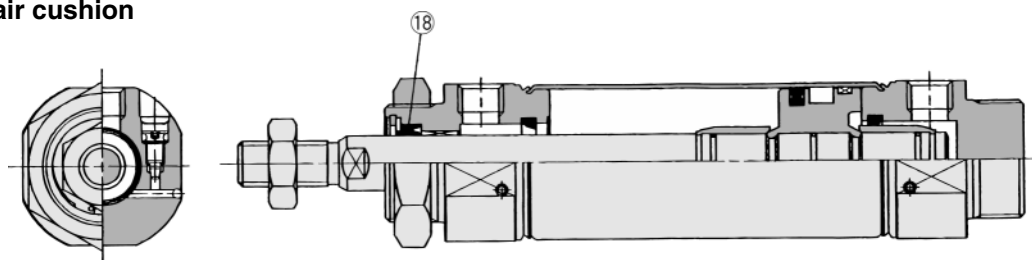

### Built-in One-touch fitting

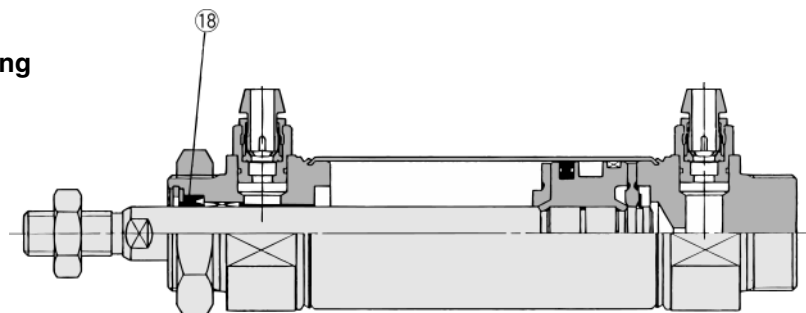

### Component Parts

No.	Description	Material	Note
①	Rod cover	Aluminum alloy	White anodized
②A	Head cover A	Aluminum alloy	White anodized (Standard style)
②B	Head cover B	Aluminum alloy	White anodized (boss-cut style)
②C	Head cover C	Aluminum alloy	White anodized (Integrated clevis style)
③	Cylinder tube	Stainless steel	
④	Piston	Aluminum alloy	Chromated
⑤	Piston rod	Carbon steel	Hard chrome plated
⑥	Bushing	Oil impregnated sintered alloy	
⑦	Seal retainer	Rolled steel	Nickel plated
⑧	Snap ring	Carbon steel	Nickel plated
⑨	Bumper A	Urethane	
⑩	Bumper B	Urethane	
⑪	Snap ring	Stainless	

No.	Description	Material	Note
⑫	Bushing for clevis	Oil impregnated sintered alloy	
⑬	Piston seal	NBR	
⑭	Piston gasket	NBR	
⑮	Wearing	Resin	
⑯	Mounting nut	Carbon steel	Nickel plated
⑰	Rod end nut	Carbon steel	Nickel plated

### Replacement Parts

#### ●With rubber bumper/With air cushion/Built-in One-touch fitting

No.	Description	Material	Bore size (mm)/Part No.			
			20	25	32	40
⑱	Rod seal	NBR	PDU-8Z	PDU-10Z	PDU-12LZ	PDU-14LZ


#### ●Air-hydro style

⑱	Rod seal	NBR	HDU-8	HDU-10	HDU-12L	HDU-14
---	----------	-----	-------	--------	---------	--------


# Standard: Double Acting Single Rod *Series CM2*

## Basic (B)


CM2B Bore size Stroke

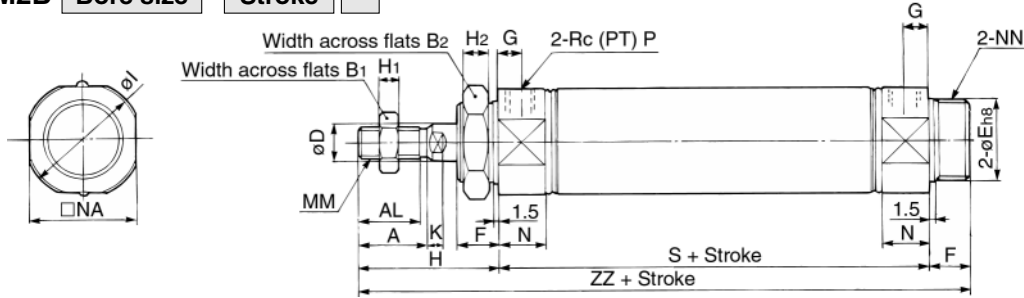


### With rod boot

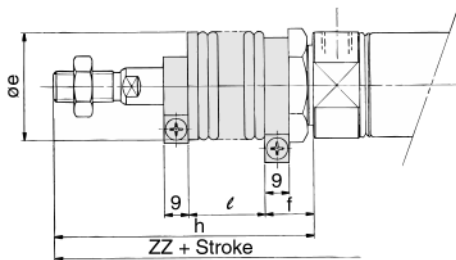


### With air cushion

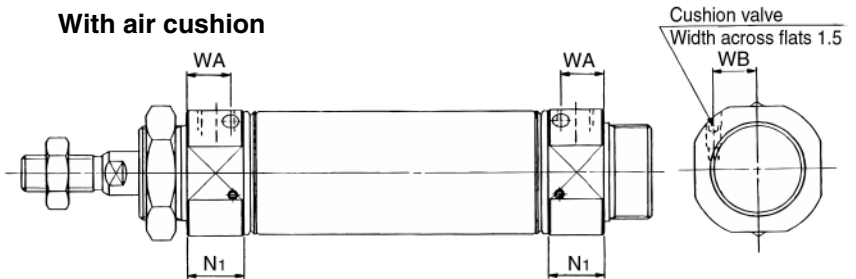

### Boss-cut

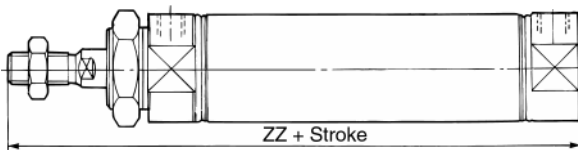

### Built-in One-touch fitting

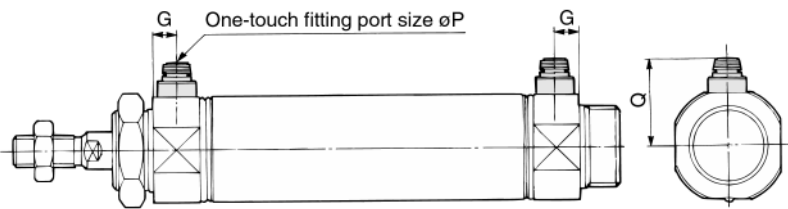

Bore	Stroke range	A	AL	B <sub>1</sub>	B <sub>2</sub>	D	E	F	G	H	H <sub>1</sub>	H <sub>2</sub>	I	K	MM	N	NA	NN	P	S	ZZ
20	1 to 300	18	15.5	13	26	8	20 <sup>0</sup> <sub>-0.033</sub>	13	8	41	5	8	28	5	M8 X 1.25	15	24	M20 X 1.5	1/8	62	116
25	1 to 300	22	19.5	17	32	10	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	8	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	1/8	62	120
32	1 to 300	22	19.5	17	32	12	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	8	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	1/8	64	122
40	1 to 300	24	21	22	41	14	32 <sup>0</sup> <sub>-0.039</sub>	16	11	50	8	10	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	1/4	88	154

### With rod boot

Symbol Bore Stroke	e	f	h					ℓ					ZZ				
			1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300
20	36	17	68	81	93	106	131	12.5	25	37.5	50	75	143	156	168	181	206
25	36	17	72	85	97	110	135	12.5	25	37.5	50	75	147	160	172	185	210
32	36	17	72	85	97	110	135	12.5	25	37.5	50	75	149	162	174	187	212
40	46	19	77	90	102	115	140	12.5	25	37.5	50	75	181	194	206	219	244

### Boss-cut

Bore	Without gaiter	ZZ				
		1 to 50	51 to 100	101 to 150	151 to 200	201 to 300
20	103	130	143	155	168	193
25	107	134	147	159	172	197
32	109	136	149	161	174	199
40	138	165	178	190	203	228

### With air cushion

Bore	N <sub>1</sub>	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15



### Built-in One-touch fitting

Bore	G	P	Q
20	8	6	23
25	8	6	26
32	8	6	28.5
40	11	8	32.5


# Series CM2

## Axial Foot (L)


CM2L Bore size — Stroke

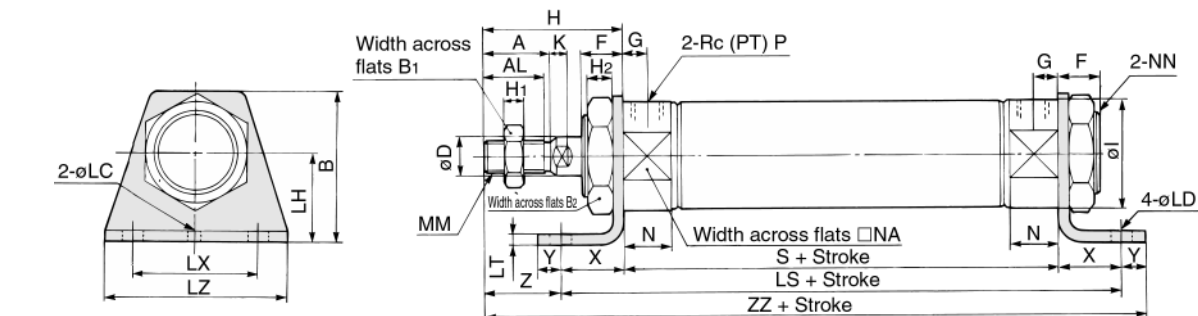



### With rod boot

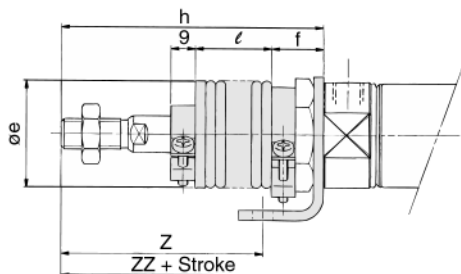

### With air cushion

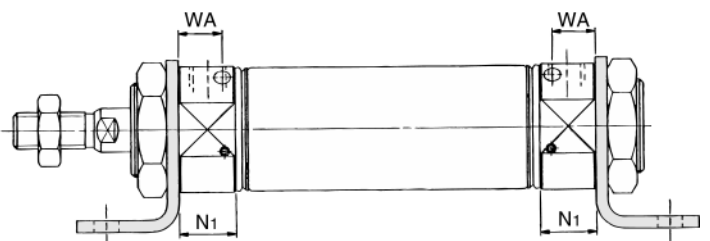

### Built-in One-touch fitting

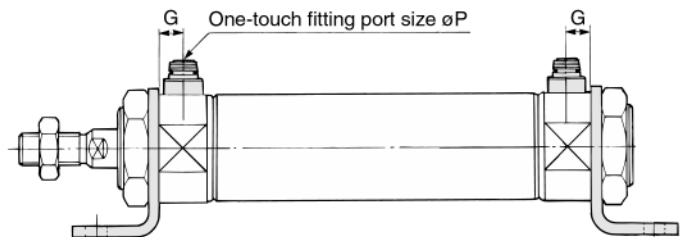

Bore	Stroke range	A	AL	B	B <sub>1</sub>	B <sub>2</sub>	D	F	G	H	H <sub>1</sub>	H <sub>2</sub>	I	K	LC	LD	LH	LS	LT	LX	LZ	MM	N	NA	NN	P	S	X	Y	Z	ZZ
20	1to400	18	15.5	40	13	26	8	13	8	41	5	8	28	5	4	6.8	25	102	3.2	40	55	M8 X 1.25	15	24	M20 X 1.5	1/8	62	20	8	21	131
25	1to450	22	19.5	47	17	32	10	13	8	45	6	8	33.5	5.5	4	6.8	28	102	3.2	40	55	M10 X 1.25	15	30	M26 X 1.5	1/8	62	20	8	25	135
32	1to450	22	19.5	47	17	32	12	13	8	45	6	8	37.5	5.5	4	6.8	28	104	3.2	40	55	M10 X 1.25	15	34.5	M26 X 1.5	1/8	64	20	8	25	137
40	1to500	24	21	54	22	41	14	16	11	50	8	10	46.5	7	4	7	30	134	3.2	55	75	M14 X 1.5	21.5	42.5	M32 X 2	1/4	88	23	10	27	171

### With rod boot

Symbol Stroke	Bore	e	f	h								ℓ								Z							
				1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500			
20	36	18.2	68	81	93	106	131	156	—	12.5	25	37.5	50	75	100	—	48	61	73	86	111	136	—				
25	36	18.2	72	85	97	110	135	160	185	12.5	25	37.5	50	75	100	125	52	65	77	90	115	140	165				
32	36	18.2	72	85	97	110	135	160	185	12.5	25	37.5	50	75	100	125	52	65	77	90	115	140	165				
40	46	20.2	77	90	102	115	140	165	190	12.5	25	37.5	50	75	100	125	54	67	79	92	117	142	167				

### With rod boot

Symbol Stroke	ZZ (mm)						
Bore	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500
20	158	171	183	196	221	246	—
25	162	175	187	200	225	250	275
32	164	177	189	202	227	252	277
40	198	211	223	236	261	286	311

### With air cushion

Bore	N <sub>1</sub>	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15


### Built-in One-touch fitting

Bore	G	P	Q
20	8	6	23
25	8	6	26
32	8	6	28.5
40	11	8	32.5


# Standard: Double Acting Single Rod *Series CM2*

## Front Flange (F)


CM2F Bore size — Stroke

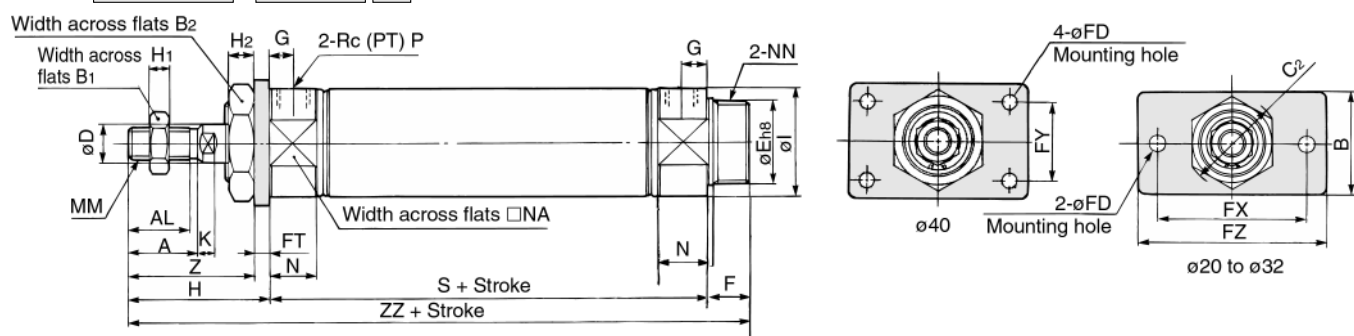


### With rod boot

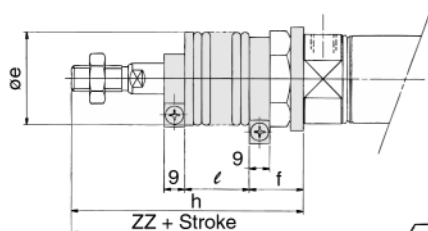


### Boss-cut

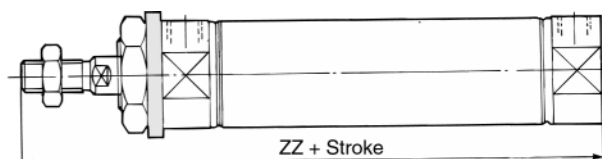

### With air cushion

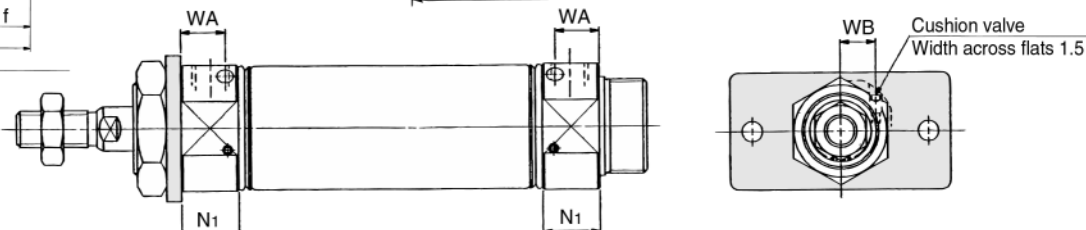

### Built-in One-touch fitting

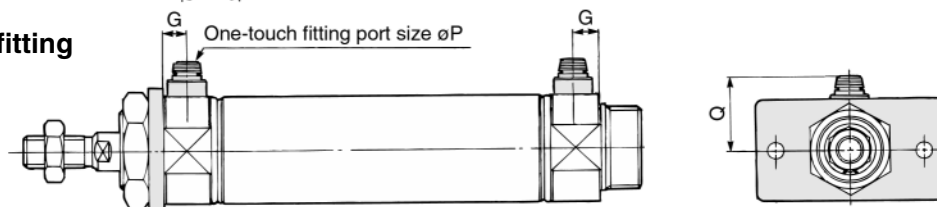

Bore	Stroke range	A	AL	B	B1	B2	C2	D	E	F	FD	FT	FX	FY	FZ	G	H	H1	H2	I	K	MM	N	NA	NN	P	S	Z	ZZ
20	1to400	18	15.5	34	13	26	30	8	20 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	41	5	8	28	5	M8 X 1.25	15	24	M20 X 1.5	1/8	62	37	116
25	1to450	22	19.5	40	17	32	37	10	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	45	6	8	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	1/8	62	41	120
32	1to450	22	19.5	40	17	32	37	12	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	45	6	8	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	1/8	64	41	122
40	1to500	24	21	52	22	41	47.3	14	32 <sup>0</sup> <sub>-0.039</sub>	16	7	5	66	36	82	11	50	8	10	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	1/4	88	45	154

### With rod boot

Symbol Stroke Bore	e	f	h								ℓ								ZZ							
			1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500			
20	36	19	68	81	93	106	131	156	—	12.5	25	37.5	50	75	100	—	143	156	168	181	206	231	—			
25	36	19	72	85	97	110	135	160	185	12.5	25	37.5	50	75	100	125	147	160	172	185	210	235	260			
32	36	19	72	85	97	110	135	160	185	12.5	25	37.5	50	75	100	125	149	162	174	187	212	237	262			
40	46	22	77	90	102	115	140	165	190	12.5	25	37.5	50	75	100	125	181	194	206	219	244	269	294			

### Boss-cut

Bore	Without gaiter	ZZ						
		With gaiter						
		1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500
20	103	130	143	155	168	193	218	—
25	107	134	147	159	172	197	222	247
32	109	136	149	161	174	199	224	249
40	138	165	178	190	203	228	253	278

### With air cushion

Bore	N1	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15


### Built-in One-touch fitting

Bore	G	P	Q
20	8	6	23
25	8	6	26
32	8	6	28.5
40	11	8	32.5


# Series CM2

## Rear Flange (G)


CM2G Bore size Stroke

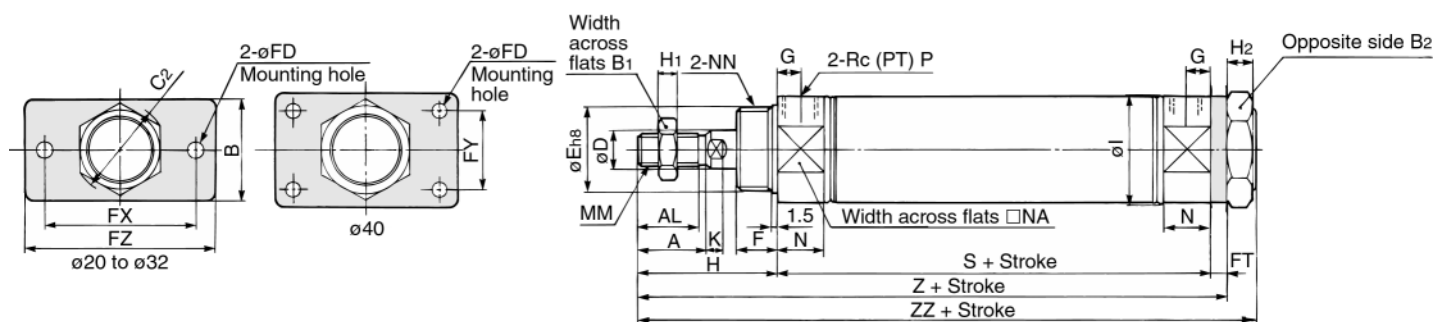


### With rod boot

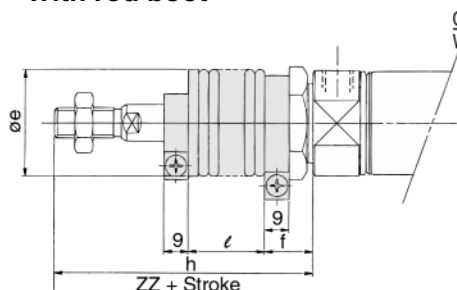

### With air cushion

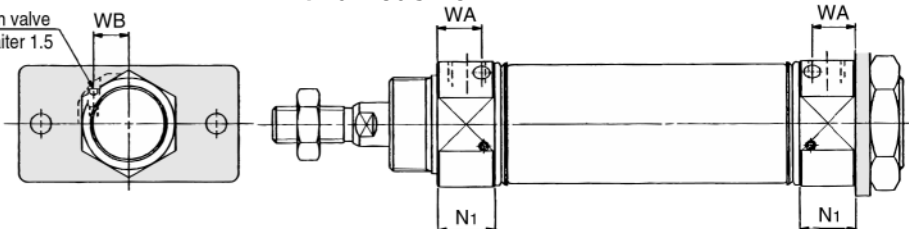

### Built-in One-touch fitting

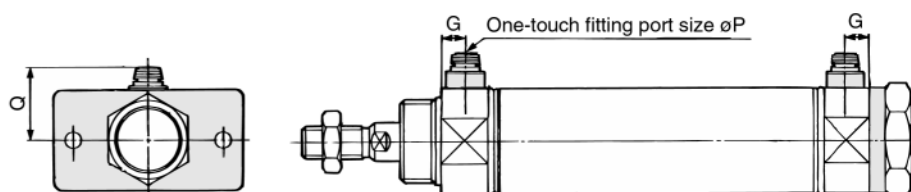

Bore	Stroke range	A	AL	B	B <sub>1</sub>	B <sub>2</sub>	C <sub>2</sub>	D	E	F	FD	FT	FX	FY	FZ	G	H	H <sub>1</sub>	H <sub>2</sub>	I
20	1 to 300	18	15.5	34	13	26	30	8	20 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	41	5	8	28
25	1 to 300	22	19.5	40	17	32	37	10	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	45	6	8	33.5
32	1 to 300	22	19.5	40	17	32	37	12	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	45	6	8	37.5
40	1 to 300	24	21	52	22	41	47.3	14	32 <sup>0</sup> <sub>-0.039</sub>	16	7	5	66	36	82	11	50	8	10	46.5

Bore	K	MM	N	NA	NN	P	S	Z	ZZ
20	5	M8 X 1.25	15	24	M20 X 1.5	1/8	62	107	116
25	5.5	M10 X 1.25	15	30	M26 X 1.5	1/8	62	111	120
32	5.5	M10 X 1.25	15	34.5	M26 X 1.5	1/8	64	113	122
40	7	M14 X 1.5	21.5	42.5	M32 X 2	1/4	88	143	154

### With air cushion

Bore	N <sub>1</sub>	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15

### Built-in One-touch fitting


Bore	G	P	Q
20	8	6	23
25	8	6	26
32	8	6	28.5
40	11	8	32.5

### With rod boot


Symbol	e	f	h					$\ell$					ZZ				
Bore	Stroke		1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300
20	35	17	68	81	93	106	131	12.5	25	37.5	50	75	143	156	168	181	206
25	35	17	72	85	97	110	135	12.5	25	37.5	50	75	147	160	172	185	210
32	35	17	72	85	97	110	135	12.5	25	37.5	50	75	149	162	174	187	212
40	46	19	77	90	102	115	140	12.5	25	37.5	50	75	181	194	206	219	244

## Single Clevis (C)


CM2C Bore size — Stroke

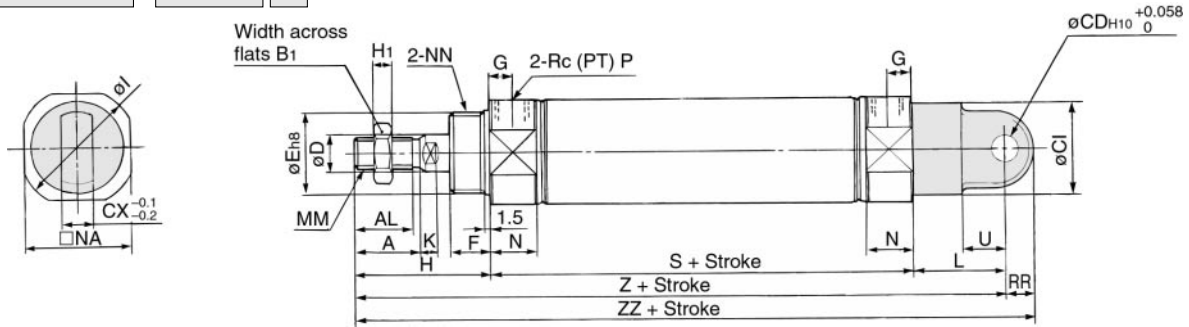


### With rod boot

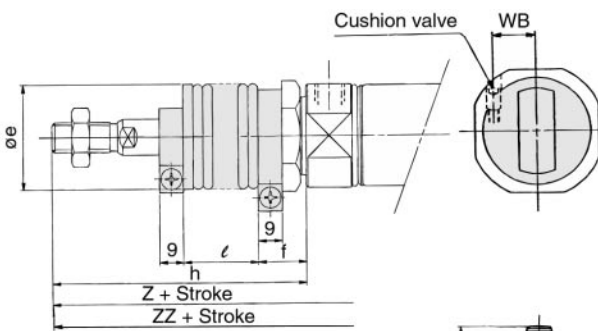

### With air cushion

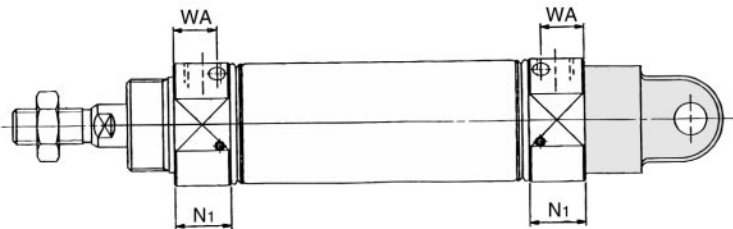

### Built-in One-touch fitting

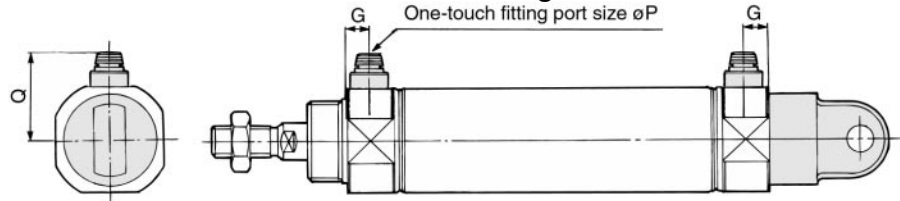

Bore	Stroke range	A	AL	B1	Cl	CD	CX	D	E	F	G	H	H1	I	K	L	MM	N	NA	NN	P	RR	S	U	Z	ZZ
20	1 to 300	18	15.5	13	24	9	10	8	20 <sup>0</sup> <sub>-0.033</sub>	13	8	41	5	28	5	30	M8 X 1.25	15	24	M20 X 1.5	1/8	9	62	14	133	142
25	1 to 300	22	19.5	17	30	9	10	10	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	33.5	5.5	30	M10 X 1.25	15	30	M26 X 1.5	1/8	9	62	14	137	146
32	1 to 300	22	19.5	17	30	9	10	12	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	37.5	5.5	30	M10 X 1.25	15	34.5	M26 X 1.5	1/8	9	64	14	139	148
40	1 to 300	24	21	22	38	10	15	14	32 <sup>0</sup> <sub>-0.039</sub>	16	11	50	8	46.5	7	39	M14 X 1.5	21.5	42.5	M32 X 2	1/4	11	88	18	177	188

### With rod boot

Symbol Stroke	Bore	e	f	h					ℓ					Z				
				1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300
20	36	17	68	81	93	106	131	135	12.5	25	37.5	50	75	160	173	185	198	223
25	36	17	72	85	97	110	135	135	12.5	25	37.5	50	75	164	177	189	202	227
32	36	17	72	85	97	110	135	135	12.5	25	37.5	50	75	166	179	191	204	229
40	46	19	77	90	102	115	140	140	12.5	25	37.5	50	75	204	217	229	242	267

Symbol Stroke	Bore	ZZ				
		1 to 50	51 to 100	101 to 150	151 to 200	201 to 300
20	169	182	194	207	232	232
25	173	186	198	211	236	236
32	175	188	200	213	238	238
40	215	228	240	253	278	278

### With air cushion

Bore	N1	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15

### Built-in One-touch fitting

Bore	G	P	Q
20	8	6	23
25	8	6	26
32	8	6	28.5
40	11	8	32.5

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1


CS1




# Series CM2

## Double Clevis (D)



CM2D Bore size Stroke

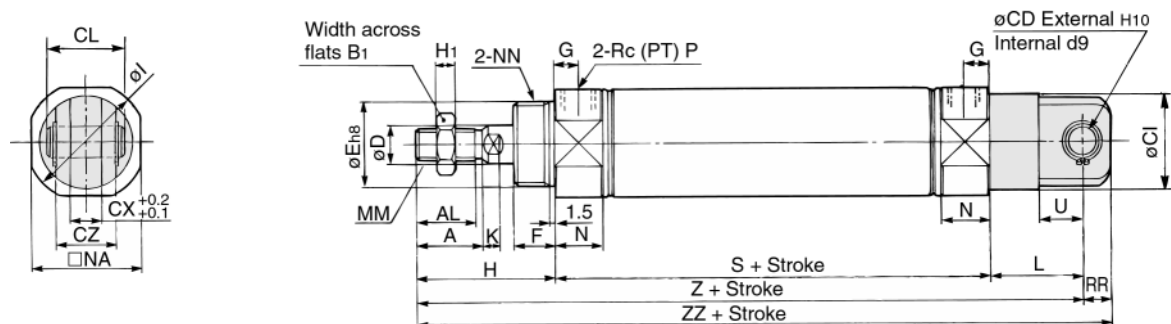


### With rod boot

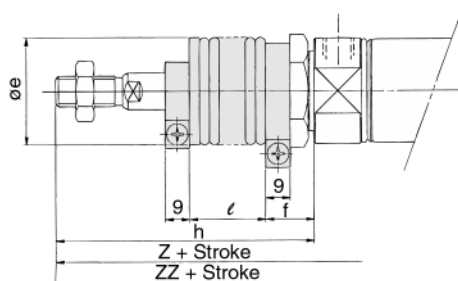

### With air cushion

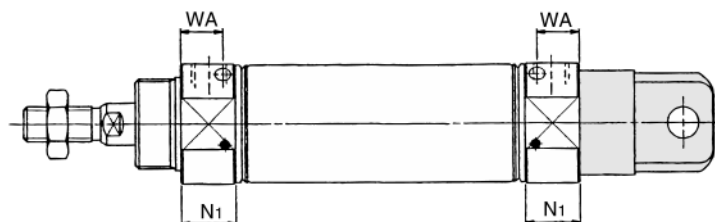

### Built-in One-touch fitting

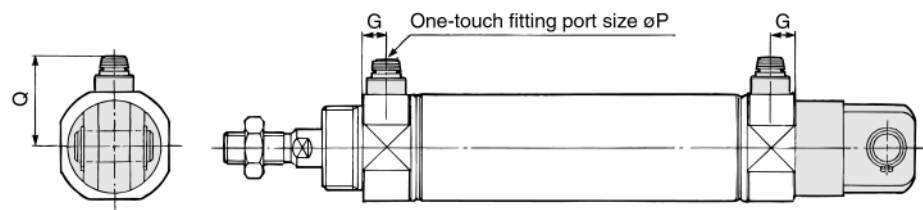

Bore	Stroke range	A	AL	B1	CD	CI	CL	CX	CZ	D	E	F	G	H	H1	I	K	L	MM	N	NA	NN	P	RR	S	U	Z	ZZ
20	1 to 300	18	15.5	13	9	24	25	10	19	8	20 <sup>0</sup> <sub>-0.033</sub>	13	8	41	5	28	5	30	M8 X 1.25	15	24	M20 X 1.5	1/8	9	62	14	133	142
25	1 to 300	22	19.5	17	9	30	25	10	19	10	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	33.5	5.5	30	M10 X 1.25	15	30	M26 X 1.5	1/8	9	62	14	137	146
32	1 to 300	22	19.5	17	9	30	25	10	19	12	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	37.5	5.5	30	M10 X 1.25	15	34.5	M26 X 1.5	1/8	9	64	14	139	148
40	1 to 300	24	21	22	10	38	41.2	15	30	14	32 <sup>0</sup> <sub>-0.039</sub>	16	11	50	8	46.5	7	39	M14 X 1.5	21.5	42.5	M32 X 2	1/4	11	88	18	177	188

\* Clevis pins and snap rings (cotter pins for ø40) are attached.

### With rod boot

Symbol Stroke	Bore	e	f	h					ℓ					Z				
				1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300
	20	36	17	68	81	93	106	131	12.5	25	37.5	50	75	160	173	185	198	223
	25	36	17	72	85	97	110	135	12.5	25	37.5	50	75	164	177	189	202	227
	32	36	17	72	85	97	110	135	12.5	25	37.5	50	75	166	179	191	204	229
	40	46	19	77	90	102	115	140	12.5	25	37.5	50	75	204	217	229	242	267

### With rod boot

Symbol Stroke	Bore	ZZ				
		1 to 50	51 to 100	101 to 150	151 to 200	201 to 300
	20	169	182	194	207	232
	25	173	186	198	211	236
	32	175	188	200	213	238
	40	215	228	240	253	278

### With air cushion

Bore	N1	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15

### Built-in One-touch fitting



Bore	G	P	Q
20	8	6	23
25	8	6	26
32	8	6	28.5
40	11	8	32.5





# Series CM2

## Rear Trunnion (T)


CM2T Bore size Stroke

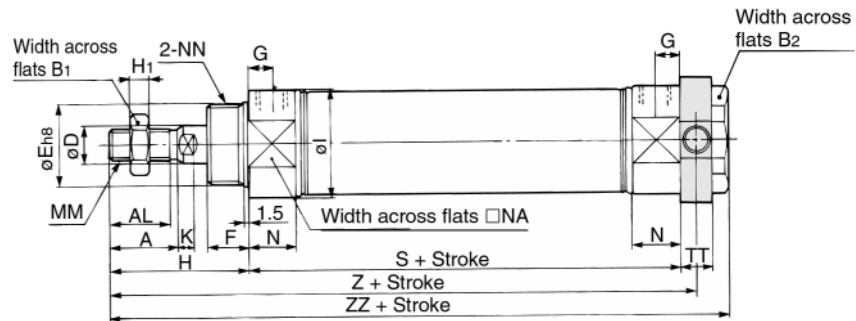


### With rod boot

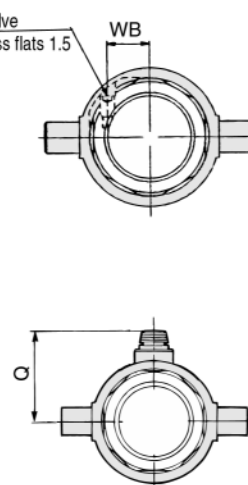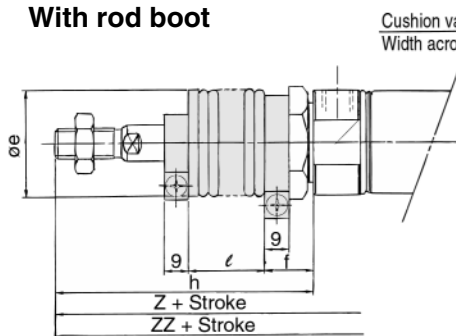

### With air cushion

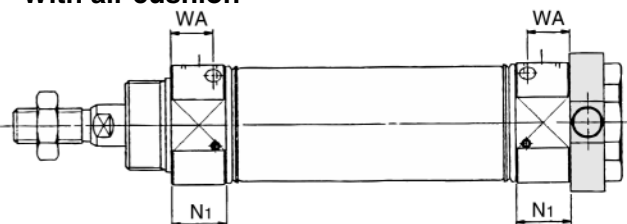

### Built-in One-touch fitting

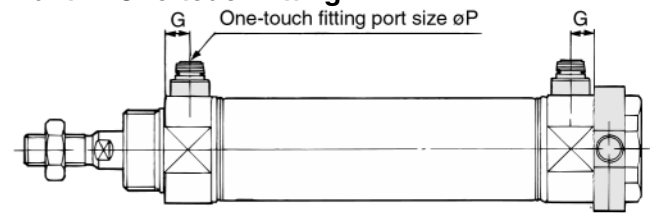

Bore	Stroke range	A	AL	B1	B2	D	E	F	G	H	H1	I	K	MM	N	NA	NN	P
20	1 to 300	18	15.5	13	26	8	20 <sup>0</sup> <sub>-0.033</sub>	13	8	41	5	28	5	M8 X 1.25	15	24	M20 X 1.5	1/8
25	1 to 300	22	19.5	17	32	10	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	1/8
32	1 to 300	22	19.5	17	32	12	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	1/8
40	1 to 300	24	21	22	41	14	32 <sup>0</sup> <sub>-0.039</sub>	16	11	50	8	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	1/4

Bore	S	TD	TT	TX	TY	TZ	Z	ZZ
20	62	8	10	32	32	52	108	118
25	62	9	10	40	40	60	112	122
32	64	9	10	40	40	60	114	124
40	88	10	11	53	53	77	143.5	154

### With rod boot

Symbol	e	f	h						
Bore	Stroke		1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500
20	36	17	68	81	93	106	131	156	—
25	36	17	72	85	97	110	135	160	185
32	36	17	72	85	97	110	135	160	185
40	46	19	77	90	102	115	140	165	190

### With rod boot

Symbol		$\ell$					Z					ZZ				
Bore	Stroke	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300
20		12.5	25	37.5	50	75	135	148	160	173	198	145	158	170	183	208
25		12.5	25	37.5	50	75	139	152	164	177	202	149	162	174	187	212
32		12.5	25	37.5	50	75	141	154	166	179	204	151	164	176	189	214
40		12.5	25	37.5	50	75	170.5	183.5	195.5	208.5	233.5	181	194	206	219	244

### With air cushion

Bore	N1	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15


### Built-in One-touch fitting

Bore	G	P	Q
20	8	6	23
25	8	6	26
32	8	6	28.5
40	11	8	32.5


# Standard: Double Acting Single Rod *Series CM2*

## Integrated Clevis (E)


CM2E Bore size — Stroke

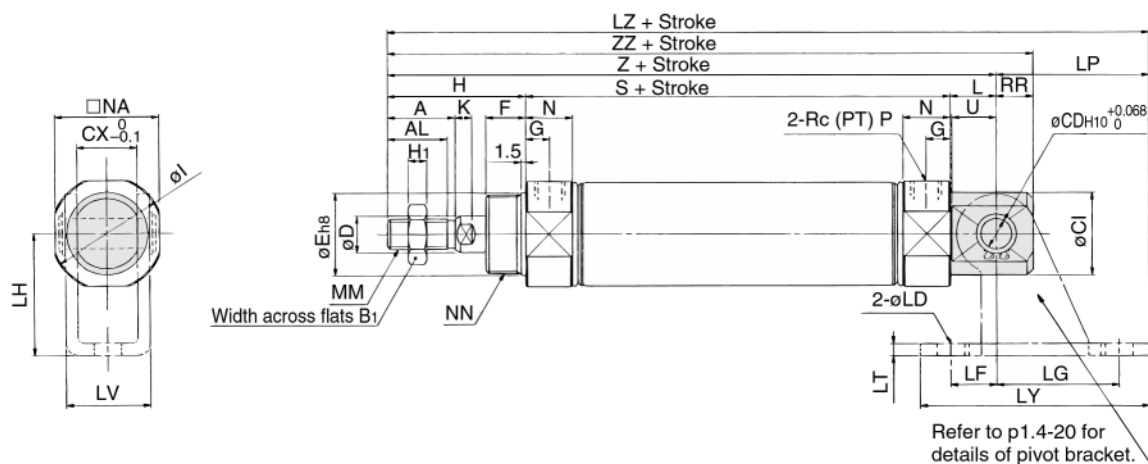

### With rod boot

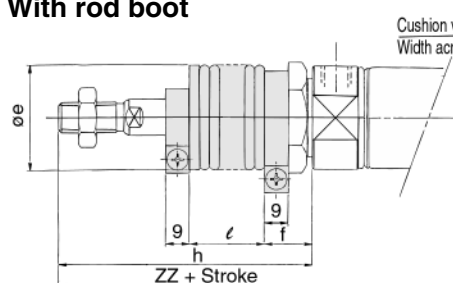

### With air cushion

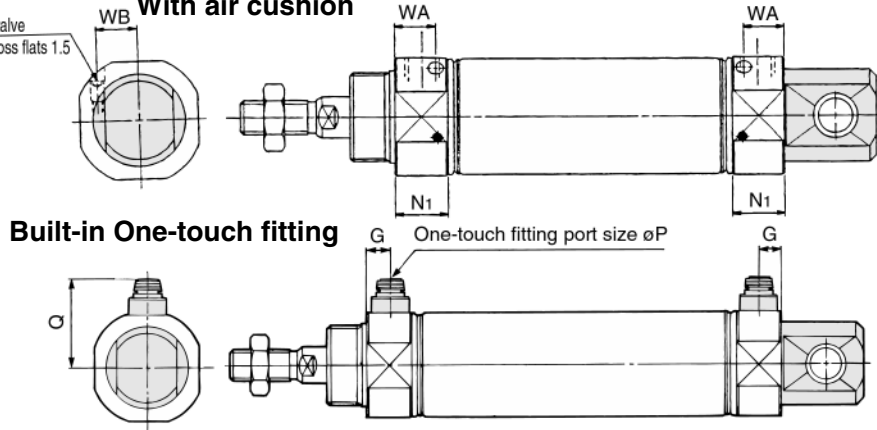

### Built-in One-touch fitting

Bore	Stroke range	A	AL	B1	CD	CI	CX	D	E	F	G	H	H1	I	K	L	MM	N	NA	NN
20	1 to 300	18	15.5	13	8	20	12	8	20 <sup>0</sup> <sub>-0.033</sub>	13	8	41	5	28	5	12	M8 X 1.25	15	24	M20 X 1.5
25	1 to 300	22	19.5	17	8	22	12	10	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	33.5	5.5	12	M10 X 1.25	15	30	M26 X 1.5
32	1 to 300	22	19.5	17	10	27	20	12	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	37.5	5.5	15	M10 X 1.25	15	34.5	M26 X 1.5
40	1 to 300	24	21	22	10	33	20	14	32 <sup>0</sup> <sub>-0.039</sub>	16	11	50	8	46.5	7	15	M14 X 1.5	21.5	42.5	M32 X 2

### With rod boot

Bore	P	RR	S	U	Z	ZZ
20	<sup>1</sup> / <sub>8</sub>	9	62	11.5	115	124
25	<sup>1</sup> / <sub>8</sub>	9	62	11.5	119	128
32	<sup>1</sup> / <sub>8</sub>	12	64	14.5	124	136
40	<sup>1</sup> / <sub>4</sub>	12	88	14.5	153	165

Symbol Stroke	e	f	h			
Bore			1 to 50	51 to 100	101 to 150	151 to 200
20	36	17	68	81	93	106
25	36	17	72	85	97	110
32	36	17	72	85	97	110
40	46	19	77	90	102	115

### With rod boot

Symbol Stroke	ℓ					Z					ZZ				
Bore	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300
20	12.5	25	37.5	50	75	142	155	167	180	205	151	164	176	189	214
25	12.5	25	37.5	50	75	146	159	171	184	209	155	168	180	193	218
32	12.5	25	37.5	50	75	151	164	176	189	214	163	176	188	201	226
40	12.5	25	37.5	50	75	180	193	205	218	243	192	205	217	230	255

### With air cushion

Bore	N1	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15

### Built-in One-touch fitting

Bore	G	P	Q
20	8	6	23
25	8	6	26
32	8	6	28.5
40	11	8	32.5

### Pivot bracket

Bore	LD	LF	LG	LH	LP	LT	LV	LY	LZ
20	6.8	15	30	30	37	3.2	18.4	59	152
25	6.8	15	30	30	37	3.2	18.4	59	156
32	9	15	40	40	50	4	28	75	174
40	9	15	40	40	50	4	28	75	203

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95


C92

CA1

CS1


## Accessory Dimensions

(mm)

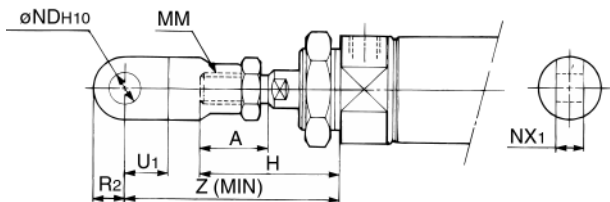


Bore size	A	H	MM	ND <sub>H10</sub>	NX <sub>1</sub>	U <sub>1</sub>	R <sub>2</sub>	Z
<b>20</b>	18	41	M8 X 1.25	9 <sub>0<sup>+0.058</sup></sub>	9 <sub>-0.1<sup>-0.2</sup></sub>	14	10	66
<b>25/32</b>	22	45	M10 X 1.25	9 <sub>0<sup>+0.058</sup></sub>	9 <sub>-0.1<sup>-0.2</sup></sub>	14	10	69
<b>40</b>	24	50	M14 X 1.5	12 <sub>0<sup>+0.070</sup></sub>	16 <sub>-0.1<sup>-0.3</sup></sub>	20	14	92

## (mm)

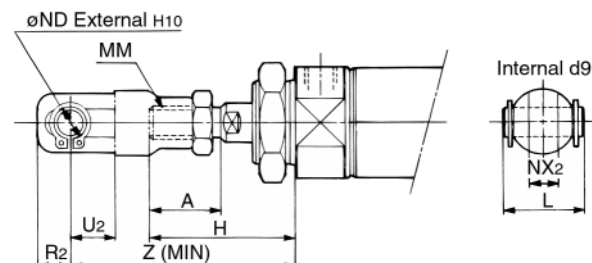

Bore size	A	H	L	MM	ND	NX <sub>2</sub>	R <sub>2</sub>	U <sub>2</sub>	Z
<b>20</b>	18	41	25	M8 X 1.25	9	9 <sup>+0.2 +0.1</sup>	10	14	66
<b>25/32</b>	22	45	25	M10 X 1.25	9	9 <sup>+0.2 +0.1</sup>	10	14	69
<b>40</b>	24	50	49.7	M14 X 1.5	12	16 <sup>+0.3 +0.1</sup>	13	25	92

(mm)




Part No.	Applicable bore size	A	A <sub>1</sub>	E <sub>1</sub>	L	L <sub>1</sub>	MM	ND	NX	NZ	R <sub>1</sub>	U <sub>1</sub>	Applicable pin part No.	Snap ring/Cotter pin size
<b>Y-020B</b>	20	46	16	20	25	36	M8 X 1.25	9	9 <sup>+0.2</sup> <sub>-0.1</sub>	18	5	14	CDP-1	C9 type for pivot
<b>Y-032B</b>	25,32	48	18	20	25	38	M10 X 1.25	9	9 <sup>+0.2</sup> <sub>-0.1</sub>	18	5	14	CDP-1	C9 type for pivot
<b>Y-040B</b>	40	68	22	24	49.7	55	M14 X 1.5	12	16 <sup>+0.3</sup> <sub>-0.1</sub>	38	13	25	CDP-3	ø3 X 18

\*Clevis pins and snap rings (cotter pins for bore size 40) are attached.


## (mm)

**Bore size:ø20, ø25, ø32**  
**CDP-1**




Snap ring: C9 type for pivot

**Bore size: ø40**  
**CDP-2**



Cotter pin:ø3 X 180


(mm)

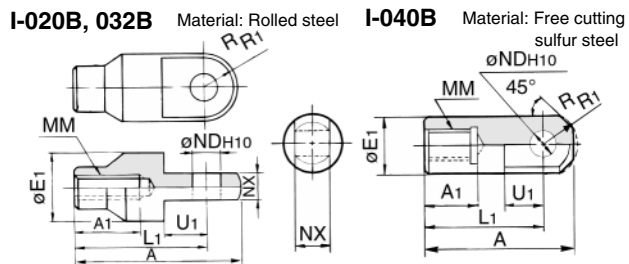

Part No.	Applicable bore size	A	A1	E1	L1	MM	NDH10	NX	R1	U1
<b>I-020B</b>	<b>20</b>	46	16	20	36	M8 X 1.25	9 <sup>+0.058</sup> <sub>-0</sub>	9 <sup>-0.1</sup> <sub>-0.2</sub>	10	14
<b>I-032B</b>	<b>25/32</b>	48	18	20	38	M10 X 1.25	9 <sup>+0.058</sup> <sub>-0</sub>	9 <sup>-0.1</sup> <sub>-0.2</sub>	10	14
<b>I-040B</b>	<b>40</b>	69	22	24	55	M14 X 1.5	12 <sup>+0.070</sup> <sub>-0</sub>	16 <sup>-0.1</sup> <sub>-0.3</sub>	15.5	20


(mm)

**Bore size:ø20, ø25, ø32**  
**CDP-1**



Snap ring: C9 type for pivot

**Bore size: ø40**  
**CDP-3**




Cotter pin:ø3 X 180

# Standard: Double Acting Single Rod *Series CM2*

## Rod End Nut

(mm)

Material: Carbon steel




Part No.	Applicable bore size	B	C	D	d	H
NT-02	20	13	15.0	12.5	M8 X 1.25	5
NT-03	25/32	17	19.6	16.5	M10 X 1.25	6
NT-04	40	22	25.4	21.0	M14 X 1.5	8

## Mounting Nut

(mm)

Material: Carbon steel




Part No.	Applicable bore size	B	C	D	d	H
SN-020B	20	26	30	25.5	M20 X 1.5	8
SN-032B	25/32	32	37	31.5	M26 X 1.5	8
SN-040B	40	41	47.3	40.5	M32 X 2.0	10

## Trunnion Nut

(mm)

Material: Carbon steel




Part No.	Applicable bore size	B	C	D	d	H
TN-020B	20	26	28	25.5	M20 X 1.5	10
TN-032B	25/32	32	34	31.5	M26 X 1.5	10
TN-040B	40	41	45	40.5	M32 X 2	10

Pivot bracket for integrated clevis style CM2E: Please order it separately.

## Pivot Bracket

(mm)

Material: Rolled steel

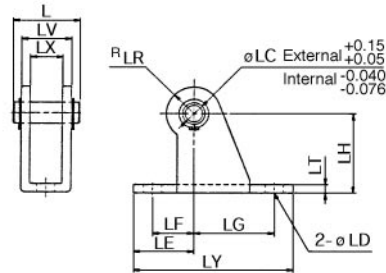


Part No.	Applicable bore size	L	LC	LD	LE	LF	LG	LH	LR	LT	LX	LY	LV	Applicable pin part No.
CM-E020B	20/25	24.5	8	6.8	22	15	30	30	10	3.2	12	59	18.4	CD-S02
CM-E032B	32/40	34	10	9	25	15	40	40	13	4	20	75	28	CD-S03

## Clevis Pin

(mm)

Material: Carbon steel



Part No.	Applicable bore size	$D_{d9}$	d	L	$\ell$	m	t	Applicable snap ring part No.
CD-S02	20/25	8 <sup>-0.040/-0.076</sup>	7.6	24.5	19.5	1.6	0.9	C8 type for pivot
CD-S03	32/40	10 <sup>-0.040/-0.076</sup>	9.6	34	29	1.35	1.15	C10 type for pivot

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1




# Series CDM2


## Auto Switch Mounting Position and Mounting Height

### Reed Switch


D-C7/C8

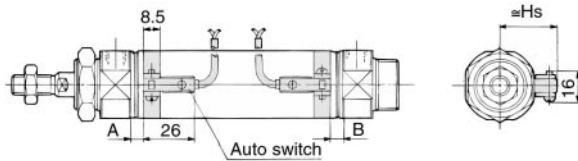


D-B5/B6/B59W

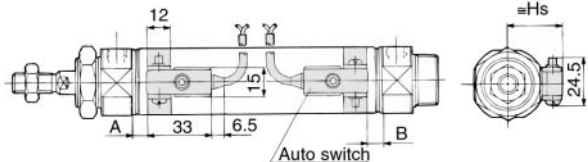


D-A33A/A34A

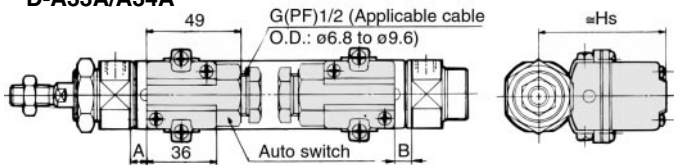

D-A44A

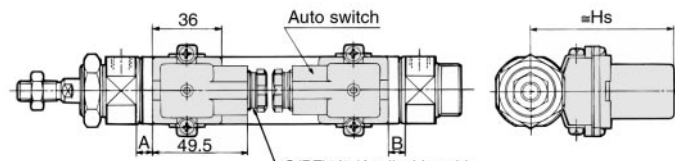


D-C73C/C80C

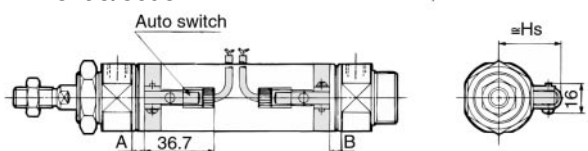


### Solid State Switch


D-H7□/H7□W/H7□F/H7BAL

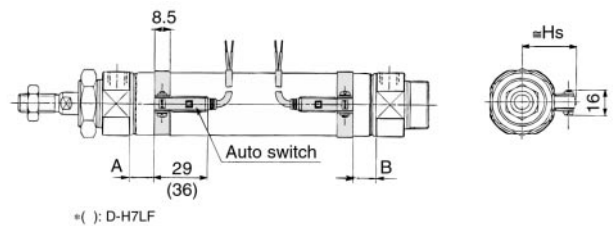


D-G5NTL

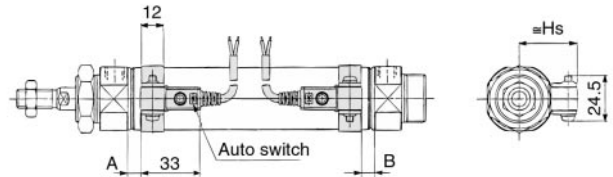

D-G39A/K39A

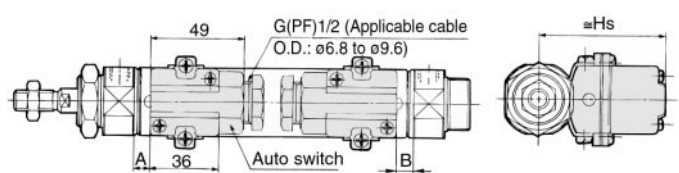

D-H7C

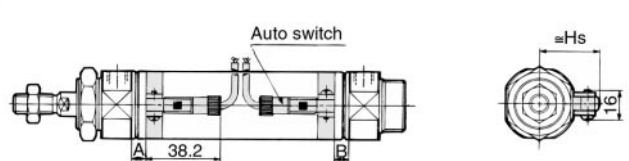

### Auto Switch Mounting Position

(mm)

Auto switch model	D-B5 D-B6		D-C7 D-C8 D-C73C D-C80C		D-B59W		D-A3□A D-G39A D-K39A D-A44A		D-H7□ D-H7C		D-H7□W D-H7BAL D-H7□F		D-G5NTL	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B
ø20	1(0)	0(0)	7(5)	6(4)	4(2)	3(1)	0.5(0)	0(0)	6(4)	5(3)	4.5(2.5)	3.5(1.5)	2.5(0.5)	1.5(0)
ø25	1(0)	0(0)	7(5)	6(4)	4(2)	3(1)	0.5(0)	0(0)	6(4)	5(3)	4.5(2.5)	3.5(1.5)	2.5(0.5)	1.5(0)
ø32	2(0)	1(0)	8(6)	7(5)	5(3)	4(2)	1.5(0)	0.5(0)	7(5)	6(4)	5.5(3.5)	4.5(2.5)	3.5(1.5)	2.5(0.5)
ø40	7	6	13	12	10	9	6.5	5.5	12	11	10.5	9.5	8.5	7.5

\*( ): With air cushion

### Mounting Height

(mm)


D-B5 D-B6 D-B59W D-G5NTL D-H7C	D-C7 D-C8 D-H7□ D-H7□W D-H7BAL D-H7□F	D-C73C D-C80C	D-A3□A D-G39A D-K39A	D-A44A
Hs	Hs	Hs	Hs	Hs
25.5	22.5	25	60	69.5
28	25	27.5	62.5	72
31.5	28.5	31	66	75.5
35.5	32.5	35	70	79.5

# Standard: Double Acting Double Rod

## Series CM2W

ø20, ø25, ø32, ø40

### How to Order

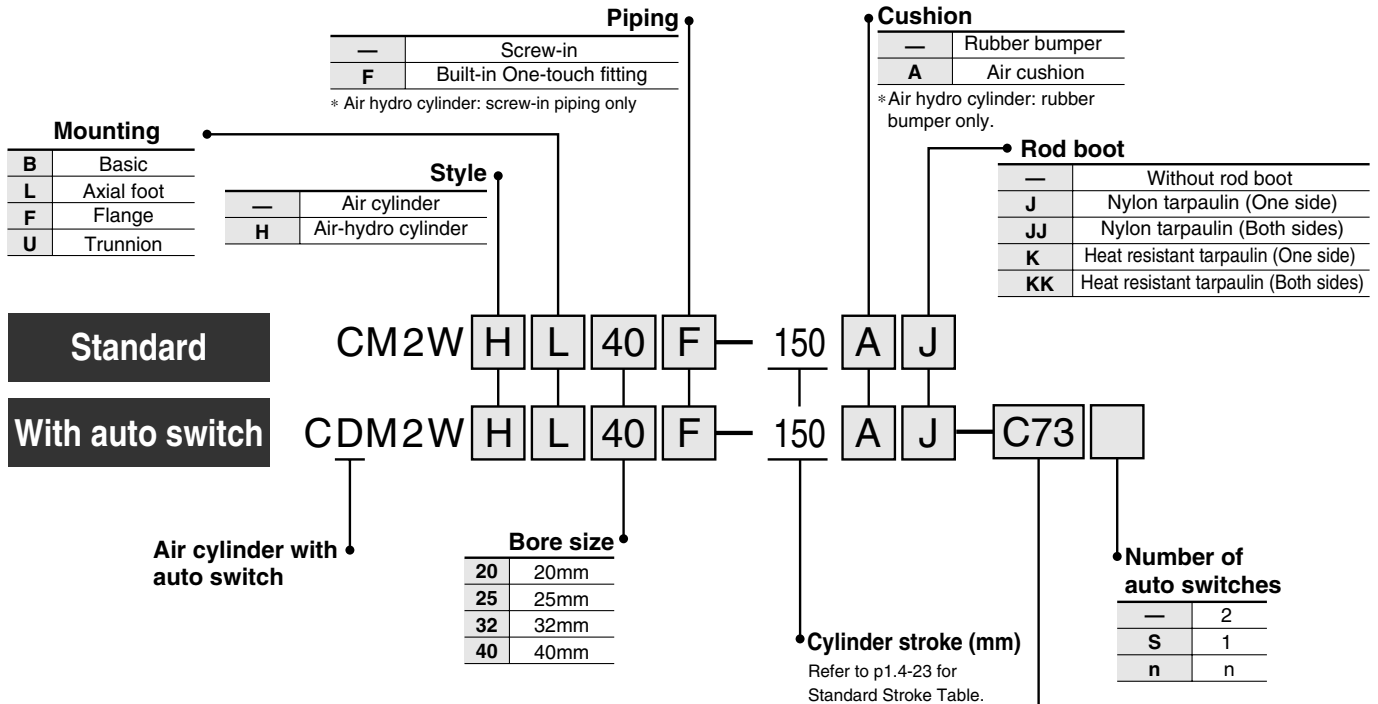

**Applicable Auto Switches/**Refer to p.5.3-2 for further information on auto switches.

Style	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Auto switch model	Lead wire* (m)				Applicable load
					DC	AC		0.5 (—)	3 (L)	5 (Z)	None (N)	
Reed switch	—	Grommet	Yes	3 wire (NPN)	—	5V	C76	●	●	—	—	IC
			No	—	12V	100V	C73	●	●	●	—	Relay PLC
			Yes	—	5V, 12V	100V or less	C80	●	●	—	—	IC
			No	—	12V	—	B53	●	●	●	—	PLC
		Connector	Yes	2 wire	12V	100V, 200V	B54	●	●	●	—	—
			No	—	12V	200V or less	B64	●	●	—	—	Relay PLC
			Yes	—	12V	—	C73C	●	●	●	●	—
			No	—	5V, 12V	24V or less	C80C	●	●	●	●	IC
		Terminal conduit	—	—	12V	—	A33A	—	—	—	●	PLC
		DIN connector	Yes	—	12V	100V, 200V	A34A	—	—	—	●	Relay PLC
Solid state switch	Diagnostic indicator (2 colour)	Grommet	Yes	3 wire (NPN)	—	—	B59W	●	●	—	—	—
			No	—	—	—	—	—	—	—	—	—
		Connector	Yes	3 wire (PNP)	5V, 12V	—	H7A1	●	●	○	—	IC
			No	—	—	—	H7A2	●	●	○	—	—
		Terminal conduit	Yes	2 wire	12V	—	H7B	●	●	○	—	—
			No	—	—	—	H7C	●	●	●	●	—
		Grommet	Yes	3 wire (NPN)	5V, 12V	—	G39A	—	—	—	●	IC
			No	—	—	—	K39A	—	—	—	●	—
		Connector	Yes	3 wire (PNP)	5V, 12V	—	H7NW	●	●	○	—	Relay PLC
			No	—	—	—	H7PW	●	●	○	—	—
		Terminal conduit	Yes	2 wire	12V	—	H7BW	●	●	○	—	—
			No	—	—	—	H7BA	—	●	○	—	—
		Grommet	Yes	3 wire (NPN)	5V, 12V	—	G5NT	—	●	○	—	IC
			No	—	—	—	H7NF	●	●	○	—	—
		Connector	Yes	4 wire (NPN)	—	—	H7LF	●	●	○	—	—
			No	—	—	—	—	—	—	—	—	—

\* Lead wire length

0.5m : —

3m : L

5m : Z

None : N

e.g.) C80CZ, C80CN

Solid state switches marked with "○" are manufactured upon receipt of order.

\* Do not indicate symbol "N" for no lead wire on "D-A3□A", "A44A", "G39A" and "K39A" models.

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1

# Series CM2W




## Specifications

Bore size (mm)	20	25	32	40
Action	Double acting/Double rod			
Fluid	Air			
Proof pressure	1.5MPa			
Max. operating pressure	1.0MPa			
Min. operating pressure	0.08MPa			
Ambient and fluid temperature	Without auto switch: -10°C to +70°C (No freezing) With auto switch: -10°C to +60°C (No freezing)			
Lubrication	Non-lube			
Thread tolerance	JIS class 2			
Stroke tolerance	+1.4 0			
Piston speed (mm/s)	50 to 750			
Cushion	Rubber bumper			
Allowable kinetic energy	0.27J	0.4J	0.65J	1.2J

## JIS symbol

Double acting/Double rod



## Made to Order

Refer to p.5.4-1 for made to order specifications of series CM2W.

## Standard Stroke

Bore size (mm)	Standard stroke (mm) (1)	Long stroke (2) (mm)	Max. stroke (mm)
20	25, 50, 75, 100, 125, 150 200, 250, 300	400	500
25		450	
32		450	
40		500	



Note 1) Other intermediate strokes can be manufactured upon receipt of order.

Note 2) Long stroke applies to the axial foot style and the front flange style. If other mounting brackets are used or the length exceeds the long stroke limit, the stroke should be selected based on the stroke selection table. (Refer to Data on p.0-21.)

## Accessories

Refer to p.1.4-19 and 1.4-20

## Mounting Bracket Part No.

Bore size mm	20	25	32	40
Axial foot *	CM-L020B	CM-L032B	CM-L040B	
Flange	CM-F020B	CM-F032B	CM-F040B	
Trunnion (with nuts)	CM-T020B	CM-T032B	CM-T040B	

\* Two foot brackets and a mounting nut are attached.

## Rod boot Materials

Symbol		Material	Max. ambient temperature
One side	Both sides		
J	JJ	Nylon tarpaulin	70°C
K	KK	Heat resistant tarpaulin	110°C *

\* Maximum ambient temperature for the rod boot only.

## Auto Switch Mounting Bracket Part No.

Auto switch model	Bore size mm			
	20	25	32	40
D-C7/C8 D-H7□	BM2-020	BM2-025	BM2-032	BM2-040
D-B5/B6 D-G5NTL	BA2-020	BA2-025	BA2-032	BA2-040
D-A3□A D-A44A D-G39A D-K39A	BM3-020	BM3-025	BM3-032	BM3-040



Note) A set of following stainless steel mounting screws is attached. (A switch mounting band is not attached. Please order the band separately.)

BBA3: D-B5/B6/G5

BBA4: D-C7/C8/H7

"D-H7BAL" switch is set on the cylinder with the screws above when shipped.

When a switch only is shipped, "BBA4" screws are attached

# Standard: Double Acting Double Rod *Series CM2W*

## Mounting Accessories

Accessories	Standard		Option		
	Mounting nut	Rod end nut	Single knuckle joint	Double <sup>(2)</sup> knuckle joint	Rod boot
Basic	● (1pc.)	● (2)	●	●	●
Foot	● (2)	● (2)	●	●	●
Flange	● (1)	● (2)	●	●	●
Trunnion	● (1) <sup>(1)</sup>	● (2)	●	●	●
Note				With pins	One/Both side



Note 1) Trunnion nuts are attached.

Note 2) Pins and snap rings (cotter pins for bore size 40) are attached for double knuckle joint.

## Weight

(kg)

Bore size (mm)		20	25	32	40
Basic weight	Basic	0.16	0.25	0.32	0.65
	Foot	0.31	0.41	0.48	0.92
	Flange	0.22	0.34	0.41	0.77
	Trunnion	0.20	0.32	0.38	0.75
Additional weight by each 50 of stroke		0.06	0.09	0.13	0.19
Accessory	Single knuckle joint	0.06	0.06	0.06	0.23
	Double knuckle joint (With pins)	0.07	0.07	0.07	0.20

Calculation example: CM2WL32-100

● Basic weight.....0.48 (Foot, ø32)

● Additional weight...0.13/50 stroke

● Cylinder stroke.....100 stroke

0.48+0.13 X 100/50=0.74kg

## Minimum Strokes for Auto Switch Mounting

(mm)

Auto switch model	Number of switches				1
	2		n		
	On different surfaces	On the same surface	On different surfaces	On the same surface	
D-C7 D-C8	15	50	$15+45(\frac{n-2}{2})$ (n=2, 4, 6...)	50+45(n-2)	10
D-H7□ D-H7□W D-H7BAL D-H7NF	15	60		60+45(n-2)	10
D-C73C D-C80C D-H7C	15	65	$15+50(\frac{n-2}{2})$ (n=2, 4, 6...)	65+50(n-2)	10
D-H7LF	20	65			10
D-B5 D-B6	15	75	$15+50(\frac{n-2}{2})$ (n=2, 4, 6...)	75+55(n-2)	10
D-B59W	20	75			15
D-A3□A D-G39A D-K39A D-A44A	35	100	35+30(n-2)	100+100(n-2)	10



## Precautions

Be sure to read before handling.  
Refer to p.0-39 to 0-43 for Safety Instructions and common precautions.

### Handling



### Warning

- ① **Do not rotate the cover.**
  - When installing the cylinder or screwing a pipe fitting into the port, the coupling portion of the cover could break if the cover is rotated.



### Caution

- ① **Be careful with the snap ring that could fly out.**
  - When replacing the rod seal, be careful with the removal of the snap ring, as the snap ring could fly out.
- ② **Do not touch the cylinder during operation.**
  - If the cylinder is operating at a high frequency, be aware that the cylinder tube surface could become very hot, creating the risk of burns.
- ③ **The One-Touch fitting cannot be replaced.**
  - The One-Touch fitting is pressed into the cover and cannot be replaced.

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1

# Series CM2W

## Air-hydro

CM2WH Mounting Bore size Stroke Rod boot

Air-hydro style

A low hydraulic pressure cylinder used at a pressure of 1.0MPa or below.

Through the concurrent use of a CC series air-hydro unit, it is possible to operate at a constant or low speed or to effect an intermediate stop, just like a hydraulic unit, while using pneumatic equipment such as a valve.



## Specifications

Style	Air-hydro style
Fluid	Turbine oil
Action	Double acting/Double rod
Bore size	ø20, ø25, ø32, ø40
Proof pressure	1.5MPa
Max. operating pressure	1.0MPa
Min. operating pressure	0.18MPa
Piston speed	15 to 300mm/s
Ambient and fluid temperature	+5 to +60°C
Thread tolerance	JIS class 2
Stroke tolerance	+1.4 0
Cushion	Rubber bumper (Standard equipment)
Mounting	Basic, Axial foot, Flange, Trunnion

\* Auto switch can be mounted.


- Construction: Refer to p.1.4-27.
- Dimensions: Refer to p.1.4-28 to 1.4-31.

## Built-in One-touch Fitting

CM2W Mounting Bore size F Stroke

Built-in One-touch fitting

A style in which One-touch fittings are built in the cylinder. It dramatically reduces the piping labour and installation space.

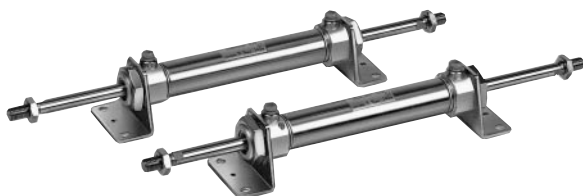

- Construction: Refer to p.1.4-27.
- Dimensions: Refer to p.1.4-28 to 1.4-31.
- Refer to p.1.4-23 for other specifications.

## With Air Cushion

CM2W Mounting Bore size Stroke A Rod boot

With air cushion

A cushion mechanism is provided on the cover at both ends to absorb the impact that is created during high speed operations. Thus, it does not transmit vibrations to the surroundings and prolongs the life of the cylinder.



## Specifications

Action	Double acting/Double rod
Bore size	ø20, ø25, ø32, ø40
Max. operating pressure	1.0MPa
Min. operating pressure	0.08MPa
Cushion	Air cushion
Piston speed	50 to 1000mm/s
Mounting	Basic, Axial foot, Flange, Trunnion

\* Auto switches can be mounted.

## Allowable Kinetic Energy

Bore size (mm)	Effective cushion length (mm)	Kinetic energy absorption
20	11.0	0.54J
25	11.0	0.78J
32	11.0	1.27J
40	11.8	2.35J

- Construction: Refer to p.1.4-27.
- Dimensions: Refer to p.1.4-28 to 1.4-31.
- Refer to p.1.4-23 for other specifications.

## Specifications

Action	Double acting/Double rod
Bore size	ø20, ø25, ø32, ø40
Max. operating pressure	1.0MPa
Min. operating pressure	0.08MPa
Cushion	Rubber bumper
Piping	Built-in One-touch fitting
Piston speed	50 to 750mm/s
Mounting	Basic, Axial foot, Flange, Trunnion

Auto switches can be mounted.

## Applicable Tube O.D./I.D.

Bore size (mm)	ø20	ø25	ø32	ø40
Applicable tube (mm)	ø6/4	ø6/4	ø6/4	ø8/6
Applicable tube material	Nylon, Soft nylon, Polyurethane			

## Caution

The One-touch fitting cannot be replaced.

- The One-touch fitting is press-fit into the cover and cannot be replaced.

# Standard: Double Acting Double Rod *Series CM2W*

## Clean Series

10-CM2W Mounting Bore size Stroke

Clean series

The rod portion of the actuator has a double seal construction, and a relief port is provided to discharge the exhaust air directly outside of the clean room. Thus, it can be used in a Class 100 clean room.




### Specifications

Action	Double acting/Double rod
Bore size	ø20, ø25, ø32, ø40
Max. operating pressure	1.0MPa
Min. operating pressure	0.08MPa
Cushion	Rubber bumper
Relief port size	M5
Piston speed	30 to 400mm/s
Mounting	Basic, Axial foot, Flange

\* Auto switches can be mounted.

## Construction

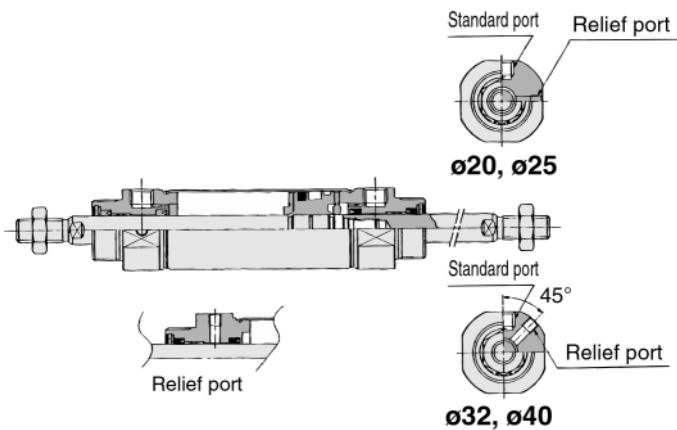

## Copper Free

20-CM2W Mounting Bore size Stroke

Max. operating pressure

This cylinder eliminates any influences of copper ions or fluororesins on colour CRTs. Copper materials have been nickel plated or replaced with non-copper materials to prevent the generation of copper ions.




### Specifications

Action	Double acting/Double rod	
Bore size	ø20, ø25, ø32, ø40	
Max. operating pressure	1.0MPa	
Min. operating pressure	0.08MPa	
Cushion	Rubber bumper	Air cushion
Piston speed	50 to 750mm/s	50 to 1000mm/s
Mounting	Basic, Axial foot, Flange, Trunnion	

\* Auto switches can be mounted.

## Construction

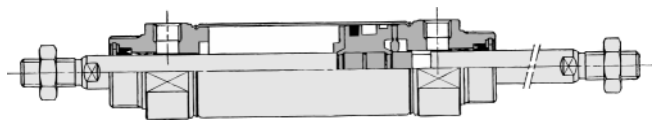

The above shows the case of rubber bumper.

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1


CS1




# Series CM2W

## Construction


### Rubber bumper

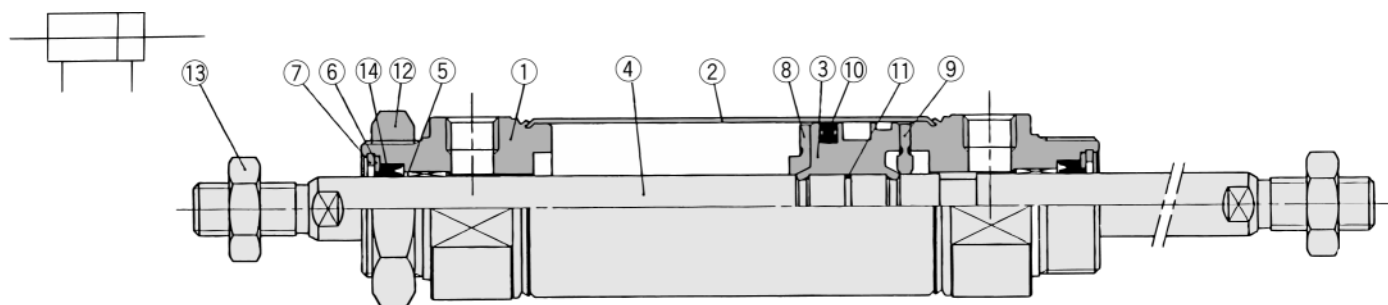


### Air-hydro

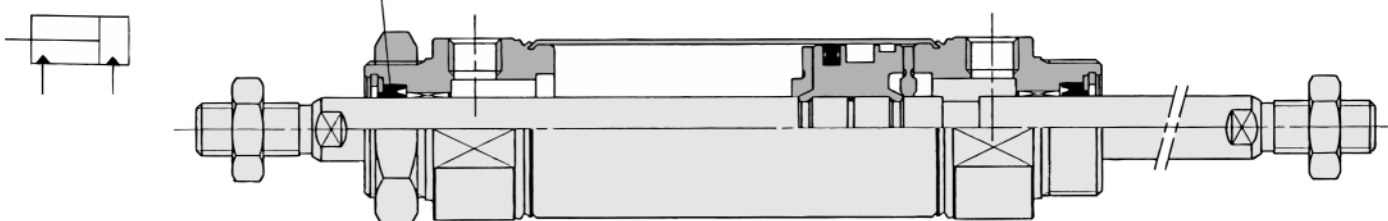

### With air cushion

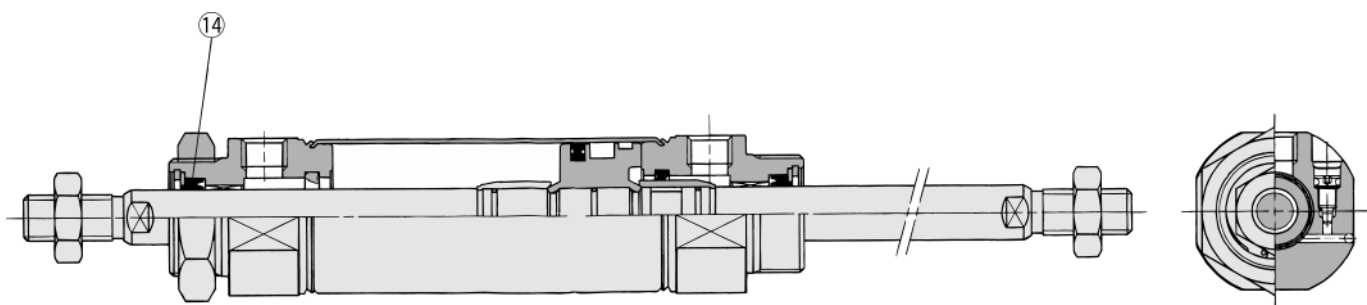

### Built-in One-touch fitting

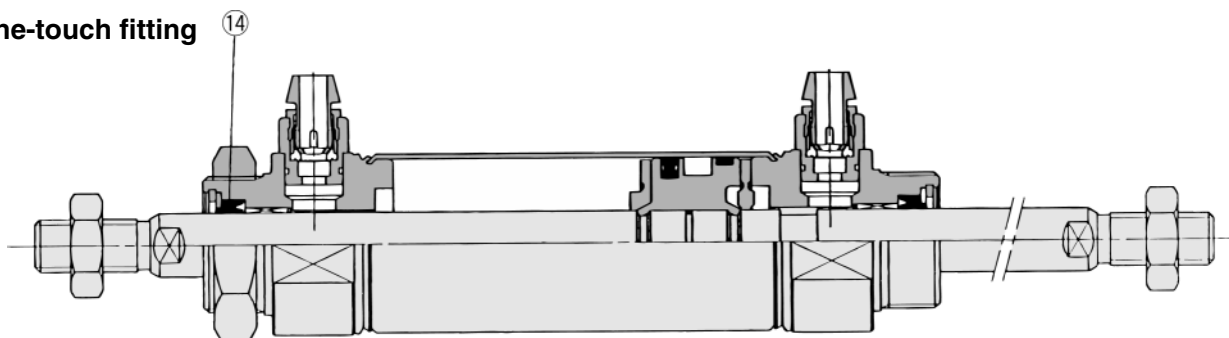

### Component Parts

No.	Description	Material	Note
①	Rod cover	Aluminum alloy	White anodized
②	Cylinder tube	Stainless steel	
③	Piston	Aluminum alloy	Chromated
④	Piston rod	Carbon steel	Hard chrome plated
⑤	Bushing	Oil impregnated sintered alloy	
⑥	Seal retainer	Rolled steel	Nickel plated
⑦	Snap ring	Carbon steel	Nickel plated
⑧	Bumper A	Urethane	
⑨	Bumper B	Urethane	
⑩	Piston seal	NBR	
⑪	Piston gasket	NBR	
⑫	Mounting nut	Carbon steel	Nickel plated
⑬	Rod end nut	Carbon steel	Nickel plated

### Replacement Parts

#### ●With rubber bumper/With air cushion/Built-in One-touch fitting

No.	Description	Material	Bore size (mm)/Part No.			
			20	25	32	40
⑭	Rod seal	NBR	PDU-8Z	PDU-10Z	PDU-12LZ	PDU-14LZ


#### ●Air-hydro

No.	Description	Material	Bore size (mm)/Part No.			
			20	25	32	40
⑭	Rod seal	NBR	HDU-8	HDU-10	HDU-12L	HDU-14

# Standard: Double Acting Double Rod *Series CM2W*

## Basic (B)

CM2WB Bore size Stroke

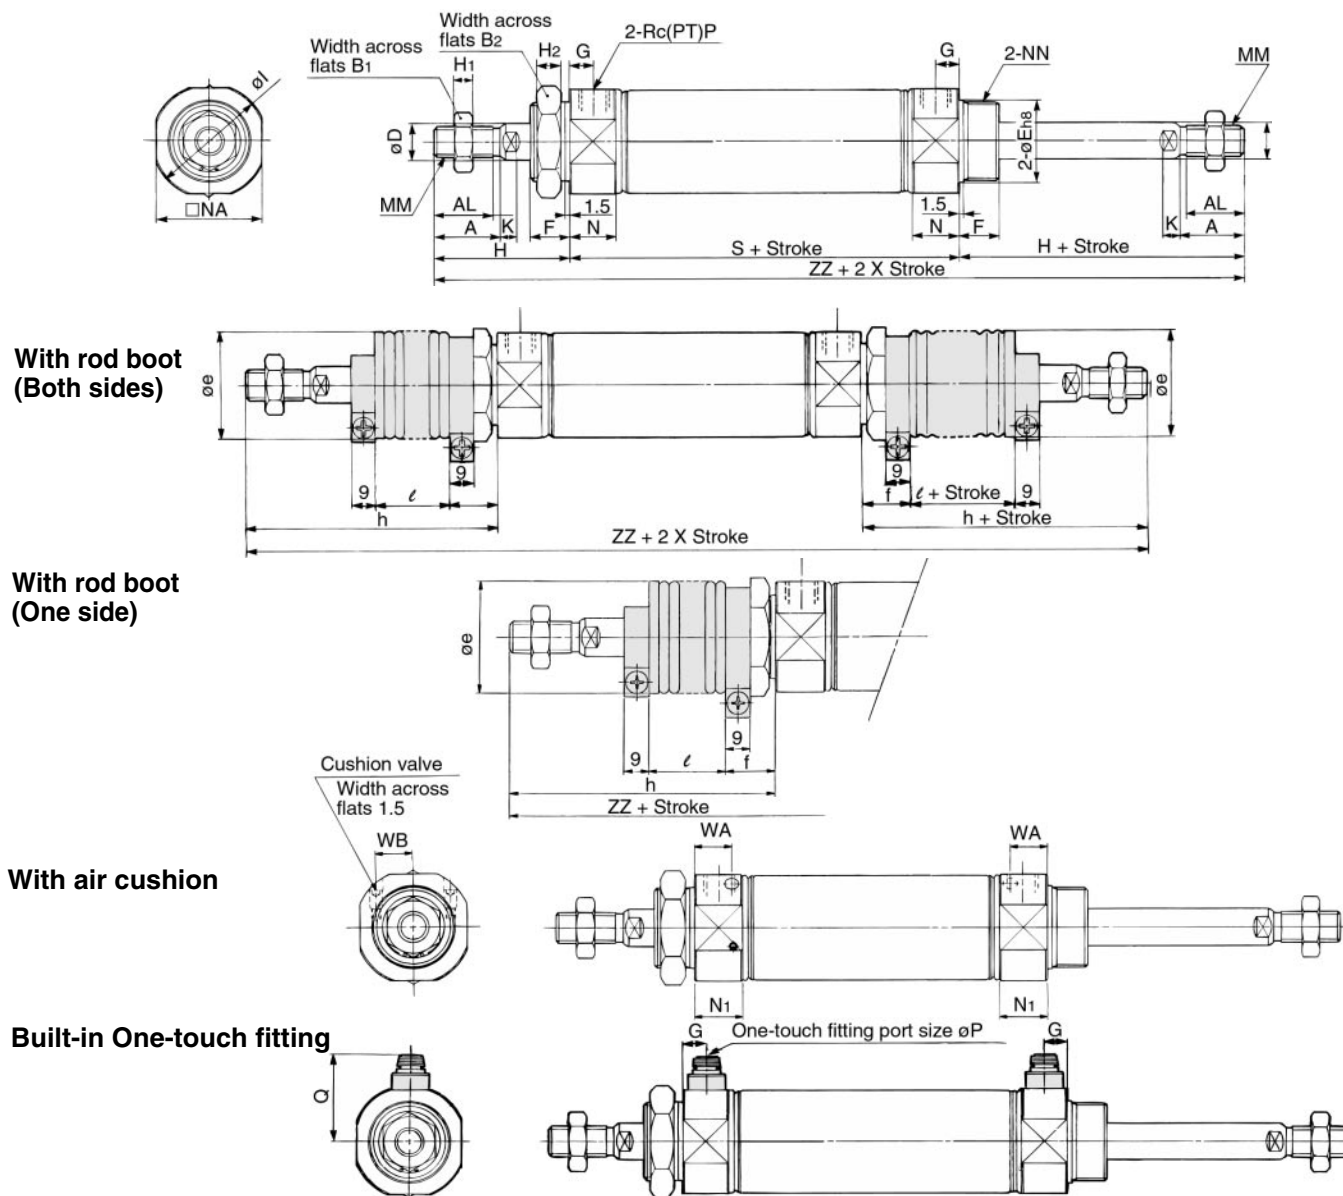

\* 301mm or longer stroke range is regarded as long stroke.

Bore	Stroke range	A	AL	B1	B2	D	E	F	G	H	H1	H2	I	K	MM	N	NA	NN	P	S	ZZ
20	1 to 300	18	15.5	13	26	8	20 <sup>-0.033</sup> <sub>0</sub>	13	8	41	5	8	28	5	M8 X 1.25	15	24	M20 X 1.5	1/8	62	144
25	1 to 300	22	19.5	17	32	10	26 <sup>-0.033</sup> <sub>0</sub>	13	8	45	6	8	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	1/8	62	152
32	1 to 300	22	19.5	17	32	12	26 <sup>-0.033</sup> <sub>0</sub>	13	8	45	6	8	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	1/8	64	154
40	1 to 300	24	21	22	41	14	32 <sup>-0.039</sup> <sub>0</sub>	16	11	50	8	10	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	1/4	88	188

### With rod boot

Bore	e	f	h					ℓ					ZZ (Both sides)				
			1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300
20	36	17	68	81	93	106	131	12.5	25	37.5	50	75	198	224	248	274	324
25	36	17	72	85	97	110	135	12.5	25	37.5	50	75	206	232	256	282	332
32	36	17	72	85	97	110	135	12.5	25	37.5	50	75	208	234	258	284	334
40	46	19	77	90	102	115	140	12.5	25	37.5	50	75	242	268	292	318	368

### With air cushion

Bore	ZZ (One side)				
	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300
20	171	184	196	209	234
25	179	192	204	217	242
32	181	194	206	219	244
40	215	228	240	253	278

### With air cushion

Bore	N1	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15


### Built-in One-touch fitting

Bore	G	P	Q
20	8	6	23
25	8	6	26
32	8	6	28.5
40	11	8	32.5



# Series CM2W

## Axial Foot (L)



CM2WL Bore size Stroke

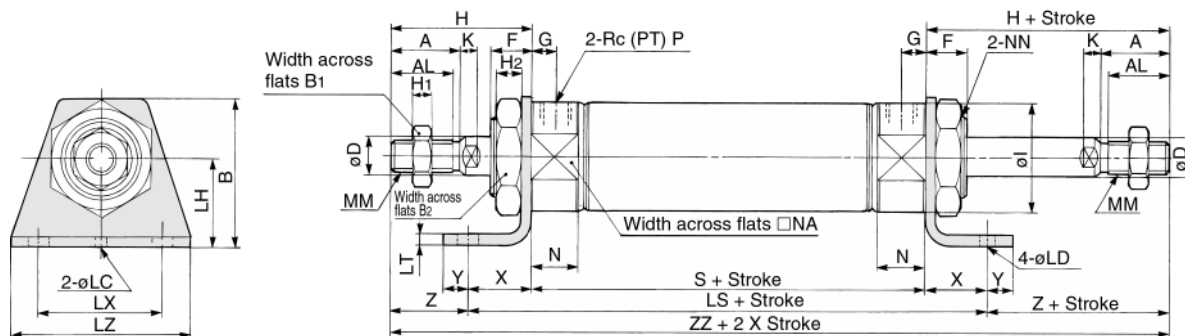

### With air cushion

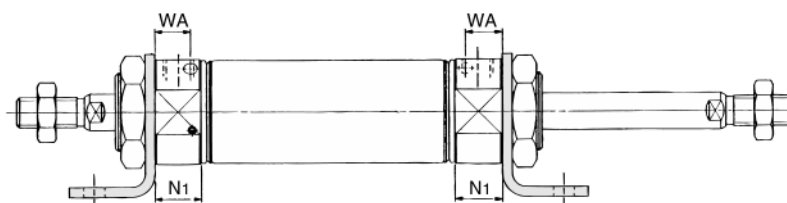

### Built-in One-touch fitting

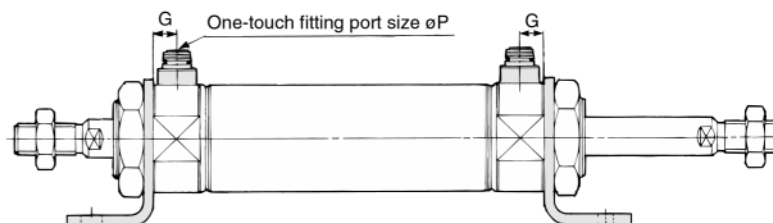

Bore	Stroke range	A	AL	B	B1	B2	D	F	G	H	H1	H2	I	K	LC	LD	LH	LS	LT	LX	LZ	MM	N	NA	NN	P	S	X	Y	Z	ZZ
20	1 to 400	18	15.5	40	13	26	8	13	8	41	5	8	28	5	4	6.8	25	102	3.2	40	55	M8 X 1.25	15	24	M20 X 1.5	1/8	62	20	8	21	144
25	1 to 450	22	19.5	47	17	32	10	13	8	45	6	8	33.5	5.5	4	6.8	28	102	3.2	40	55	M10 X 1.25	15	30	M26 X 1.5	1/8	62	20	8	25	152
32	1 to 450	22	19.5	47	17	32	12	13	8	45	6	8	37.5	5.5	4	6.8	28	104	3.2	40	55	M10 X 1.25	15	34.5	M26 X 1.5	1/8	64	20	8	25	154
40	1 to 500	24	21	54	22	41	14	16	11	50	8	10	46.5	7	4	7	30	134	3.2	55	75	M14 X 1.5	21.5	42.5	M32 X 2	1/4	88	23	10	27	188

### With air cushion

Bore	N1	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15

### Built-in One-touch fitting

Bore	G	P	Q
20	8	6	23
25	8	6	26
32	8	6	28.5
40	11	8	32.5





\* In case of a gaiter, refer to p.1.4-28 (basic) and p.1.4-11.



# Standard: Double Acting Double Rod *Series CM2W*

## Flange (F)



CM2WF Bore size Stroke

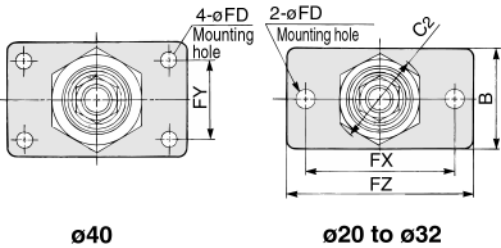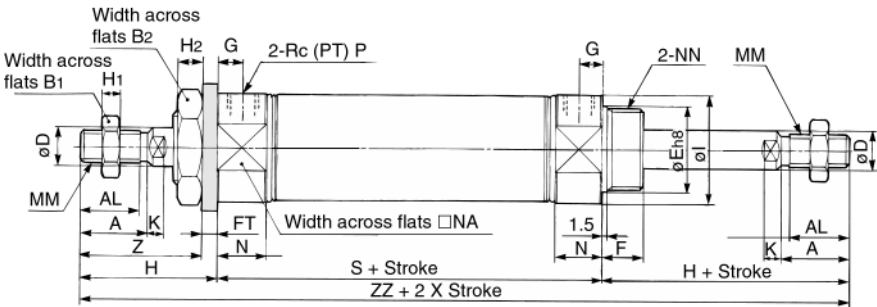

## With air cushion

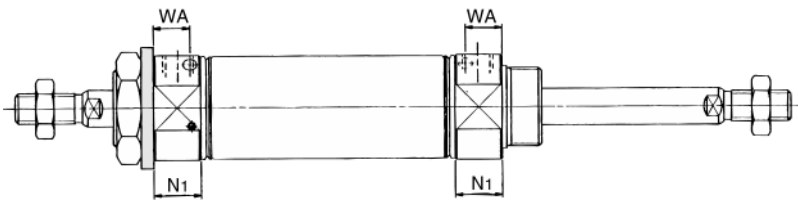

## Built-in One-touch fitting

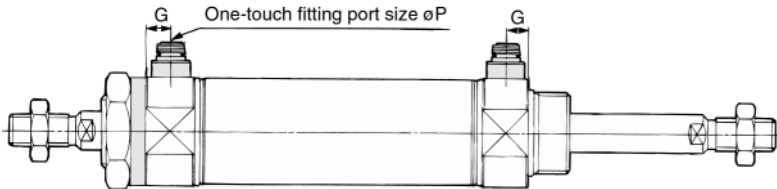

Bore	Stroke range	A	AL	B	B1	B2	C2	D	E	F	FD	FT	FX	FY	FZ	G	H	H1	H2	I	K	MM
20	1 to 300	18	15.5	34	13	26	30	8	20 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	41	5	8	28	5	M8 X 1.25
25	1 to 300	22	19.5	40	17	32	37	10	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	45	6	8	33.5	5.5	M10 X 1.25
32	1 to 300	22	19.5	40	17	32	37	12	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	45	6	8	37.5	5.5	M10 X 1.25
40	1 to 300	24	21	52	22	41	47.3	14	32 <sup>0</sup> <sub>-0.039</sub>	16	7	5	66	36	82	11	50	8	10	46.5	7	M14 X 1.5

Bore	N	NA	NN	P	S	Z	ZZ
20	15	24	M20 X 1.5	1/8	62	37	144
25	15	30	M26 X 1.5	1/8	62	41	152
32	15	34.5	M26 X 1.5	1/8	64	41	154
40	21.5	42.5	M32 X 2	1/4	88	45	188

## With air cushion

Bore	N1	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15

## Built-in One-touch fitting

Bore	G	P	Q
20	8	6	23
25	8	6	26
32	8	6	28.5
40	11	8	32.5




\* In case of a gaiter, refer to p.1.4-28 (basic) and p.1.4-13.


# Series CM2W

## Trunnion (U)


CM2WU Bore size Stroke

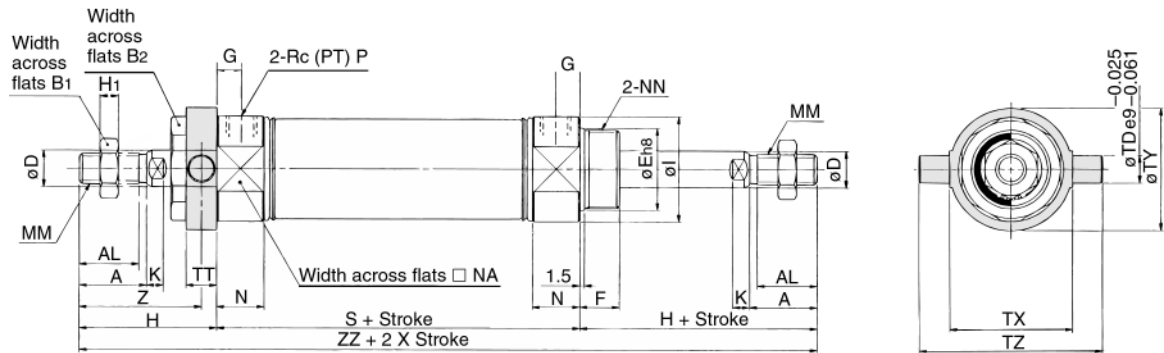

### With air cushion

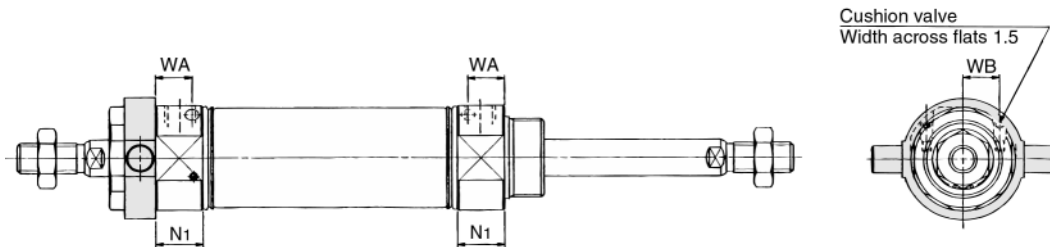

### Built-in One-touch fitting

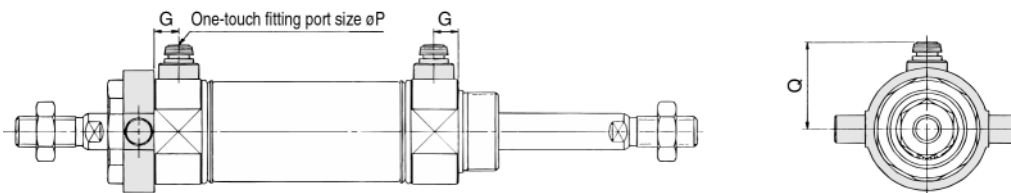

Bore	Stroke range	A	AL	B1	B2	D	E	F	G	H	H1	I	K	MM	N	NA	NN	P	S
20	1 to 300	18	15.5	13	26	8	20 <sup>0</sup> <sub>-0.033</sub>	13	8	41	5	28	5	M8 X 1.25	15	24	M20 X 1.5	1/8	62
25	1 to 300	22	19.5	17	32	10	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	1/8	62
32	1 to 300	22	19.5	17	32	12	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	1/8	64
40	1 to 300	24	21	22	41	14	32 <sup>0</sup> <sub>-0.039</sub>	16	11	50	8	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	1/4	88

Bore	TD	TT	TX	TY	TZ	Z	ZZ
20	8	10	32	32	52	36	144
25	9	10	40	40	60	40	152
32	9	10	40	40	60	40	154
40	10	11	53	53	77	44.5	188

### With air cushion

Bore	N1	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15

### Built-in One-touch fitting

Bore	G	P	Q
20	8	6	23
25	8	6	26
32	8	6	28.5
40	11	8	32.5




\* In case of a gaiter, refer to p.1.4-28 (basic) and p.1.4-16.


## Auto Switch Mounting Position and Mounting Height

### Reed Switch


D-C7/C8

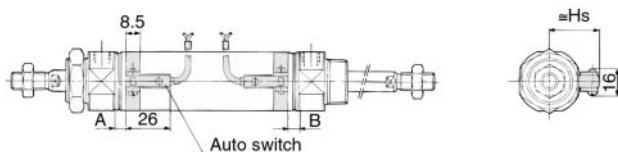


D-B5/B6/B59W

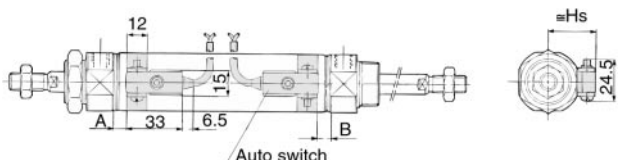


D-A33A/A34A

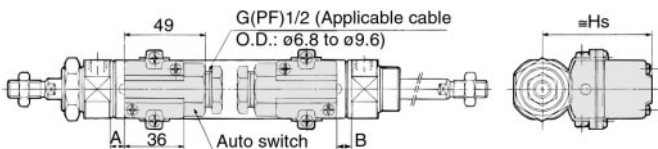

D-A44A

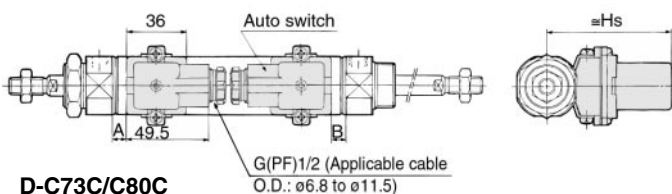


D-C73C/C80C

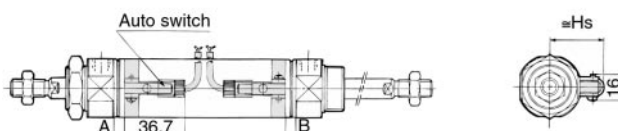


### Solid State Switch


D-H7□/H7□W/H7□F/H7BAL

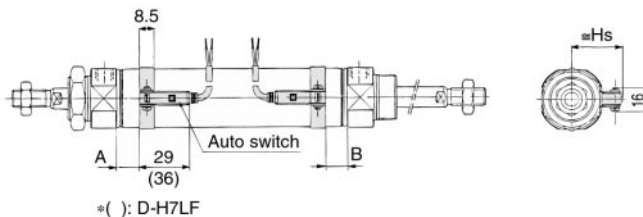


D-G5NTL

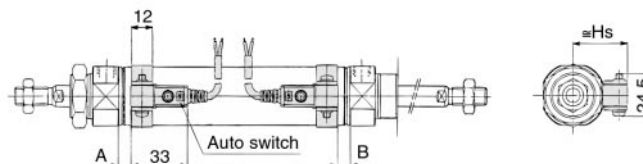

D-G39A/K39A

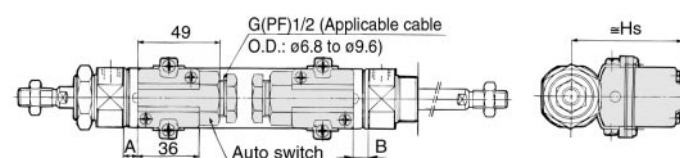

D-H7C

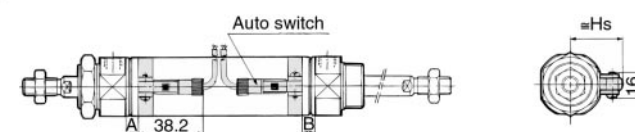

### Auto Switch Mounting Position

(mm)

Auto switch model	D-B5 D-B6		D-C7 D-C8 D-C73C D-C80C		D-B59W		D-A3□A D-G39A D-K39A D-A44A		D-H7□ D-H7C		D-H7□W D-H7BAL D-H7□F		D-G5NTL	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B
ø20	1(0)	0(0)	7(5)	6(4)	4(2)	3(1)	0.5(0)	0(0)	6(4)	5(3)	4.5(2.5)	3.5(1.5)	2.5(0.5)	1.5(0)
ø25	1(0)	0(0)	7(5)	6(4)	4(2)	3(1)	0.5(0)	0(0)	6(4)	5(3)	4.5(2.5)	3.5(1.5)	2.5(0.5)	1.5(0)
ø32	2(0)	1(0)	8(6)	7(5)	5(3)	4(2)	1.5(0)	0.5(0)	7(5)	6(4)	5.5(3.5)	4.5(2.5)	3.5(1.5)	2.5(0.5)
ø40	7	6	13	12	10	9	6.5	5.5	12	11	10.5	9.5	8.5	7.5

\*( ): With air cushion

### Mounting Height

(mm)

D-B5 D-B6 D-B59W D-G5NTL D-H7C		D-C7 D-C8 D-H7 D-H7□W D-H7BAL D-H7□F		D-C73C D-C80C	D-A3□A D-G39A D-K39A	D-A44A
Hs		Hs		Hs	Hs	Hs
25.5		22.5		25	60	69.5
28		25		27.5	62.5	72
31.5		28.5		31	66	75.5
35.5		32.5		35	70	79.5

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1




# Standard: Single Acting Spring Return/Extend

## Series CM2

ø20, ø25, ø32, ø40

### How to Order

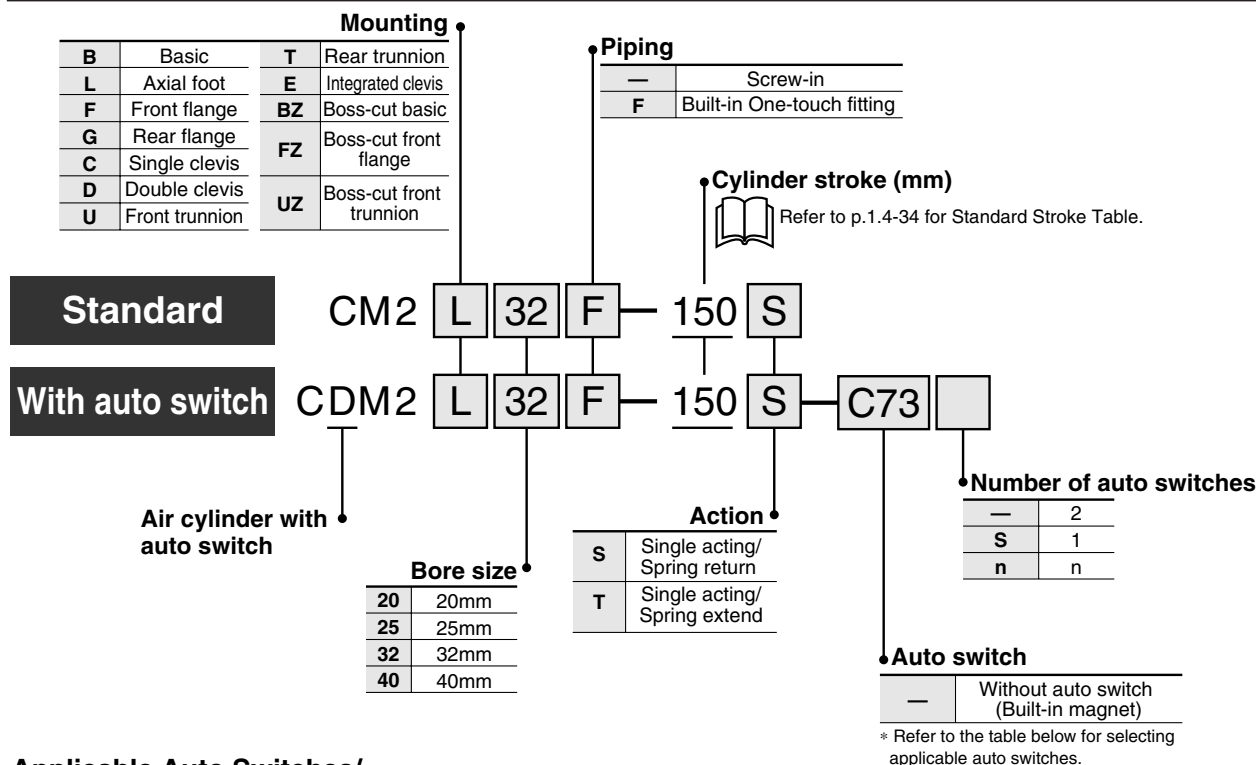

### Applicable Auto Switches/Refer to p.5.3-2 for further information on auto switches.

Style	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Auto switch model	Lead wire (m)*				Applicable load	
					DC	AC		0.5 (—)	3 (L)	5 (Z)	None (N)		
Reed switch	—	Grommet	Yes	3 wire (NPN)	—	5V	C76	●	●	—	—	IC	—
			No	—	12V	100V	C73	●	●	●	—	Relay	PLC
			Yes	2 wire	5V, 12V	100V or less	C80	●	●	—	—	IC	PLC
			No	—	12V	—	B53	●	●	●	—	—	PLC
			Yes	2 wire	12V	100V, 200V	B54	●	●	●	—	—	Relay
		Connector	No	—	12V	200V or less	B64	●	●	—	—	PLC	PLC
			Yes	2 wire	12V	—	C73C	●	●	●	●	—	Relay
			No	—	5V, 12V	24V or less	C80C	●	●	●	●	IC	PLC
			Yes	2 wire	12V	—	A33A	—	—	—	●	—	PLC
			Yes	2 wire	12V	100V, 200V	A34A	—	—	—	●	—	Relay
Solid state switch	Diagnostic indicator (2colour)	Grommet	Yes	3 wire (NPN)	—	—	A44A	—	—	—	●	—	PLC
			No	—	—	—	B59W	●	●	—	—	—	—
		Connector	Yes	3 wire (NPN)	5V, 12V	—	H7A1	●	●	○	—	IC	—
			No	3 wire (PNP)	—	—	H7A2	●	●	○	—	—	—
		Terminal conduit	Yes	2 wire	12V	—	H7B	●	●	○	—	—	—
			No	2 wire	—	—	H7C	●	●	●	●	—	—
		Grommet	Yes	3 wire (NPN)	5V, 12V	—	G39A	—	—	—	●	IC	—
			No	2 wire	12V	—	K39A	—	—	—	●	—	—
		Water resistant (2colour)	Yes	3 wire (NPN)	5V, 12V	—	H7NW	●	●	○	—	Relay	PLC
			No	3 wire (PNP)	—	—	H7PW	●	●	○	—	—	—
		With timer	Yes	2 wire	12V	—	H7BW	●	●	○	—	—	—
			No	2 wire	—	—	H7BA	—	●	○	—	—	—
		Diagnostic output (2colour)	Yes	3 wire (NPN)	5V, 12V	—	G5NT	—	●	○	—	IC	—
			No	3 wire (PNP)	—	—	H7NF	●	●	○	—	—	—
		Latch with diagnostic output (2colour)	Yes	4 wire (NPN)	—	—	H7LF	●	●	○	—	—	—
			No	—	—	—	—	—	—	—	—	—	—



\* Lead wire length

0.5m : —

3m : L

5m : Z

None: N

e.g.) C80CZ, C80CN

\* Solid state switches marked with "○" are manufactured upon receipt of order.

\* Do not indicate symbol "N" for no lead wire on "D-A3□A", "A44A", "G39A" and "K39A" models.

# Standard: Single Acting Spring Return/Extend *Series CM2*



## Specifications

Action	Single acting/Spring return	Single acting/Spring extend
Style	Air cylinder	
Cushion	Rubber bumper	
Fluid	Air	
Proof pressure	1.5MPa	
Max. operating pressure	1.0MPa	
Min. operating pressure	0.18MPa	0.23MPa
Ambient and fluid temperature	Without auto switch: -10°C to +70°C (No freezing) With auto switch: -10 to °C +60°C (No freezing)	
Lubrication	Non-lube	
Thread tolerance	JIS class 2	
Stroke tolerance	+1.4 0	
Piston speed	50 to 750mm/s	

## Allowable Kinetic Energy

Bore size (mm)	20	25	32	40
Allowable kinetic energy	0.27	0.4	0.65	1.2


## Standard Stroke

Bore size (mm)	Standard stroke (mm) <sup>(1)</sup>
20	25, 50, 75, 100, 125, 150
25	25, 50, 75, 100, 125, 150
32	25, 50, 75, 100, 125, 150, 200
40	25, 50, 75, 100, 125, 150, 200, 250


Note 1) Other intermediate strokes can be manufactured upon receipt of order.  
Contact SMC for longer strokes.

## JIS symbol

Single acting/  
Spring return



Spring extend



**Made to Order**

Refer to p.5.4-1 for made to order specifications of series CM2R.

## Minimum Strokes for Auto Switch Mounting

Auto switch model	Number of switches				1
	2		n		
	On different surfaces	On the same surface	On different surfaces	On the same surface	
D-C7 D-C8	15	50	15+45( $\frac{n-2}{2}$ ) (n=2, 4, 6...)	50+45(n-2)	10
D-H7□ D-H7□W D-H7BAL D-H7NF	15	60		60+45(n-2)	10
D-C73C D-C80C D-H7C	15	65	15+50( $\frac{n-2}{2}$ ) (n=2, 4, 6...)	65+50(n-2)	10
D-H7LF	20	65	20+50( $\frac{n-2}{2}$ ) (n=2, 4, 6...)		10
D-B5 D-B6	15	75	15+50( $\frac{n-2}{2}$ ) (n=2, 4, 6...)	75+55(n-2)	10
D-B59W	20	75	20+50( $\frac{n-2}{2}$ ) (n=2, 4, 6...)		15
D-A3□A D-G39A D-K39A D-A44A	35	100	35+30(n-2)	100+100(n-2)	10

## Mounting Bracket

Refer to p.1.4-35 for part numbers of the mounting brackets.

## Auto Switch Mounting Band

Refer to p.1.4-35 for part numbers of the mounting bands.

# Series CM2

## Boss-cut Style

Boss for the head cover bracket is eliminated and the total length of cylinder is shortened.



## Comparison of total cylinder length with standard style (mm)

ø20	ø25	ø32	ø40
▲13	▲13	▲13	▲16

## Mounting

- Boss-cut basic (BZ)
- Boss-cut flange (FZ)
- Boss-cut trunnion (UZ)

## Mounting Accessories

Accessories	Standard			Option		
	Mounting nut	Rod end nut	Clevis pin	Single knuckle joint	Double knuckle joint (3)	Pivot bracket
Basic	● (1 pc.)	●	—	●	●	—
Axial foot	● (2)	●	—	●	●	—
Front flange	● (1)	●	—	●	●	—
Rear flange	● (1)	●	—	●	●	—
Integrated clevis	—(1)	●	—	●	●	●
Single clevis	—(1)	●	—	●	●	—
Double clevis (3)	—(1)	●	●	●	●	—
Front trunnion	●(1) (2)	●	—	●	●	—
Rear trunnion	●(1) (2)	●	—	●	●	—
Boss-cut basic	● (1)	●	—	●	●	—
Boss-cut flange	● (1)	●	—	●	●	—
Boss-cut trunnion	● (1)	●	—	●	●	—
Note					With pins	With pins



Note 1) Mounting nuts are not attached for the integrated clevis, the single clevis, and the double clevis styles.

Note 2) Trunnion nuts are attached for the front trunnion and the rear trunnion styles.

Note 3) Pins and snap rings (cotter pins for bore size 40) are attached for double clevis and the double knuckle joint.

## Rod End Accessories

Refer to p.1.4-19 and 1.4-20 for mounting brackets.

## Mounting Bracket Part No.

Bore size mm	20	25	32	40
Axial foot*	CM-L020B	CM-L032B	CM-L040B	CM-L040B
Flange	CM-F020B	CM-F032B	CM-F040B	CM-F040B
Single clevis	CM-C020B	CM-C032B	CM-C040B	CM-C040B
Double clevis** (with pins)	CM-D020B	CM-D032B	CM-D040B	CM-D040B
Trunnion (with nuts)	CM-T020B	CM-T032B	CM-T040B	CM-T040B

\* Two foot brackets and a mounting nut are attached.

\*\* Clevis pins and snap rings (cotter pins for bore size 40) are attached.

## Auto Switch Mounting Bracket Part No.

Auto switch model	Bore size (mm)			
	20	25	32	40
D-C7/C8 D-H7□	BM2-020	BM2-025	BM2-032	BM2-040
D-B5/B6 D-G5NTL	BA2-020	BA2-025	BA2-032	BA2-040
D-A3□/A/A44A D-G39A/K39A	BM3-020	BM3-025	BM3-032	BM3-040



Note) A set of following stainless steel mounting screws is attached.  
(A switch mounting band is not attached. Please order the band separately.)

BBA3: D-B5/B6/G5

BBA4: D-C7/C8/H7

· "D-H7BAL" switch is set on the cylinder with the screws above when shipped.

When a switch only is shipped, "BBA4" screws are attached.

# Standard: Single Acting Spring Return/Extend *Series CM2*

## Weight

### Spring Return

Bore size (mm)		(kg)			
		20	25	32	40
Basic weight	25stroke	0.20	0.30	0.42	0.77
	50stroke	0.22	0.33	0.46	0.84
	75stroke	0.27	0.42	0.58	1.03
	100stroke	0.29	0.45	0.63	1.09
	125stroke	0.35	0.54	0.76	1.29
	150stroke	0.37	0.57	0.80	1.36
	200stroke	—	—	0.97	1.61
	250stroke	—	—	—	1.87
Mounting bracket weight	Axial foot	0.15	0.16	0.16	0.27
	Flange	0.06	0.09	0.09	0.12
	Single clevis	0.04	0.04	0.04	0.09
	Double clevis	0.05	0.06	0.06	0.13
	Trunnion	0.04	0.07	0.07	0.10
	Integrated clevis	-0.02	-0.02	-0.01	-0.04
	Boss-cut basic	-0.01	-0.02	-0.02	-0.03
	Boss-cut flange	0.05	0.07	0.07	0.09
	Boss-cut trunnion	0.03	0.05	0.05	0.07
	Pivot bracket (with pins)	0.07	0.07	0.14	0.14
Accessory	Single knuckle joint	0.06	0.06	0.06	0.23
	Double knuckle joint (with pins)	0.07	0.07	0.07	0.20

Calculation Example: CM2L32-100S (Bore size ø32, Foot, 100 stroke)  
0.63 (Basic weight) +0.16 (Mounting bracket weight)=0.79kg

### Spring Extend

Bore size (mm)		(kg)			
		20	25	32	40
Basic weight	25stroke	0.19	0.29	0.40	0.74
	50stroke	0.21	0.32	0.44	0.81
	75stroke	0.25	0.39	0.54	0.97
	100stroke	0.27	0.42	0.58	1.03
	125stroke	0.32	0.49	0.69	1.20
	150stroke	0.34	0.52	0.73	1.27
	200stroke	—	—	0.88	1.49
	250stroke	—	—	—	1.72
Mounting bracket weight	Axial foot	0.15	0.16	0.16	0.27
	Flange	0.06	0.09	0.09	0.12
	Single clevis	0.04	0.04	0.04	0.09
	Double clevis	0.05	0.06	0.06	0.13
	Trunnion	0.04	0.07	0.07	0.10
	Integrated clevis	-0.02	-0.02	-0.01	-0.04
	Boss-cut basic	-0.01	-0.02	-0.02	-0.03
	Boss-cut flange	0.05	0.07	0.07	0.09
	Boss-cut trunnion	0.03	0.05	0.05	0.07
	Pivot bracket (with pins)	0.07	0.07	0.14	0.14
Accessory	Single knuckle joint	0.06	0.06	0.06	0.23
	Double knuckle joint (with pins)	0.07	0.07	0.07	0.20

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1

## Built-in One-touch Fitting

CM2	Mounting	Bore size	F	Stroke	Action
-----	----------	-----------	---	--------	--------

● Built-in One-touch fitting

A style in which One-touch fittings are built in the cylinder. It dramatically reduces the piping labour and installation space.



- Construction: Refer to p.1.4-38.
- Dimensions: Refer to p.1.4-39 to 1.4-47.
- Refer to p.1.4-34 for other specifications.

## Specifications

Action	Single acting/Spring return	Single acting/Spring extend
Bore size	ø20, ø25, ø32, ø40	
Max. operating pressure	1.0MPa	
Min. operating pressure	0.18MPa	0.23MPa
Cushion	Rubber bumper	
Piping	Built-in One-touch fitting	
Piston speed	50 to 750mm/s	
Mounting	Basic, Axial foot, Front flange, Rear flange, Single clevis, Double clevis, Front trunnion, Rear trunnion, Integrated clevis, Boss-cut	

\* Auto switches can be mounted.

## Applicable Tube O.D./I.D.

Bore size (mm)	ø20	ø25	ø32	ø40
Applicable tube (mm)	ø6/4	ø6/4	ø6/4	ø8/6
Applicable tube material	Nylon, Soft nylon, Polyurethane			

## Caution

The One-touch fitting cannot be replaced.  
The One-touch fitting is press-fit into the cover and cannot be replaced.

# Series CM2

## Copper Free

20-CM2 Mounting Bore size Stroke Action

• Copper free

This cylinder eliminates any influences of copper ions or fluororesins on colour CRTs. Copper materials have been nickel plated or replaced with non-copper materials to prevent the generation of copper ions.




## Specifications

Action	Single acting/Spring return	Single acting/Spring extend
Bore size	ø20, ø25, ø32, ø40	
Max. operating pressure	1.0MPa	
Min. operating pressure	0.18MPa	0.23MPa
Cushion	Rubber bumper	
Relief port size	M5	
Piston speed	50 to 750mm/s	
Mounting	Basic, Axial foot, Front flange, Rear flange, Single clevis, Double clevis, Front trunnion, Rear trunning, Integrated clevis, Boss-cut.	

\* Auto switches can be mounted.

## Construction

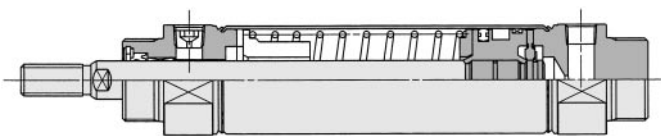

\* The above shows the case of single acting/spring return style.

## ⚠ Precautions

Be sure to read before handling. Refer to p.0-39 to 0-43 for Safety Instructions and common precautions.

### Handling

#### ⚠ Warning

- ① **Do not rotate the cover.**
  - When installing the cylinder or screwing a pipe fitting into the port, the coupling portion of the cover could break if the cover is rotated.


#### ⚠ Caution

- ① **Be careful with the snap ring that could fly out.**
  - When replacing the rod seal, be careful with the removal of the snap ring, as the snap ring could fly out.
- ② **Do not touch the cylinder during operation.**
  - If the cylinder is operating at a high frequency, be aware that the cylinder tube surface could become very hot, creating the risk of burns.
  - If the cylinder is operating at a high frequency, be aware that the cylinder tube surface could become very hot, creating the risk of burns.
- ③ **The One-Touch fitting cannot be replaced.**
  - The One-Touch fitting is press-fit into the cover and cannot be replaced.


# Standard: Single Acting Spring Return/Extend *Series CM2*

## Construction


### Spring return

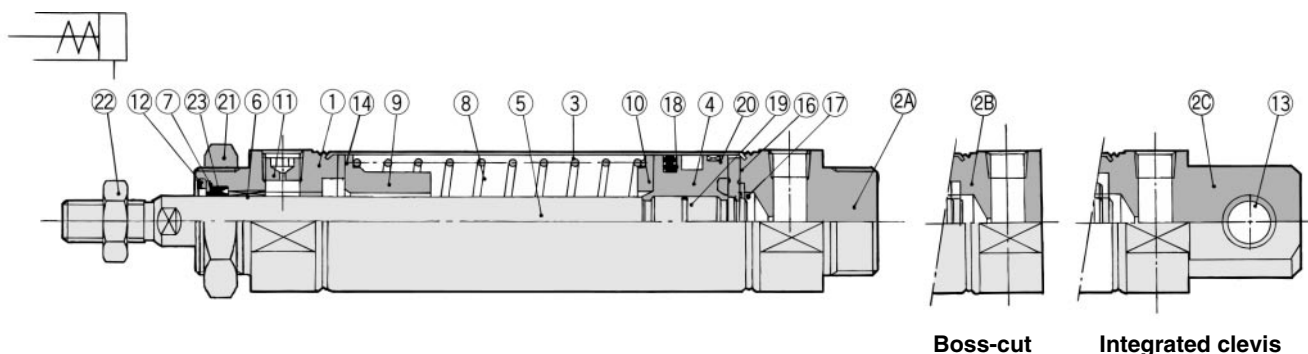


### Spring return/Built-in One-touch fitting

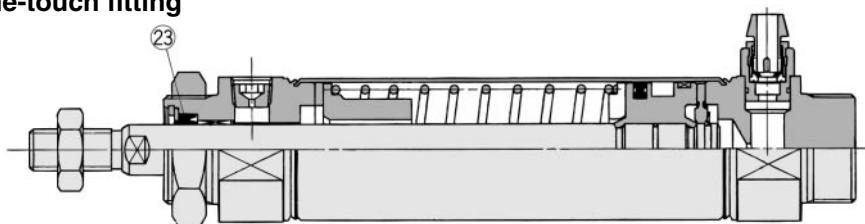

### Spring extend

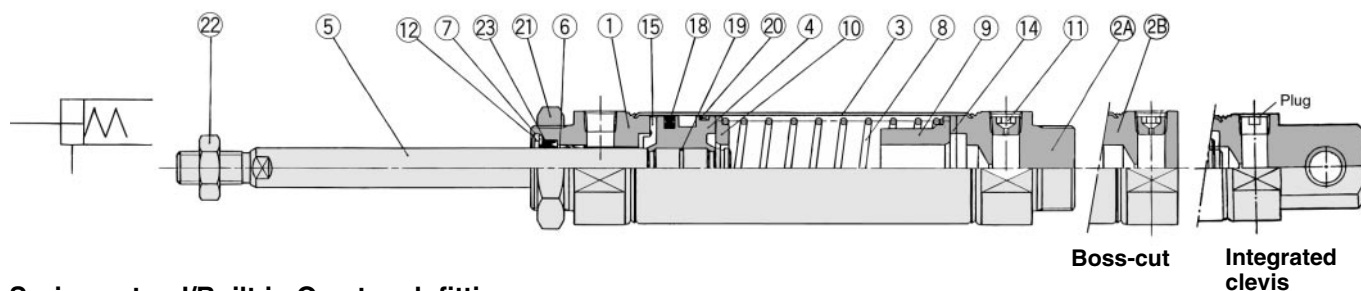

### Spring extend/Built-in One-touch fitting

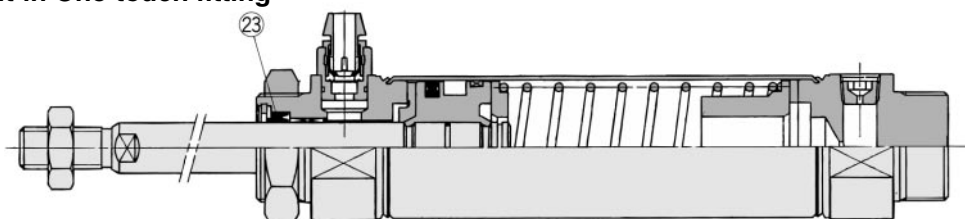

## Component Parts

No.	Description	Material	Note
①	Rod cover	Aluminum alloy	White anodized
②A	Head cover A	Aluminum alloy	White anodized(Standard style)
②B	Head cover B	Aluminum alloy	White anodized(Boss-cut style)
②C	Head cover C	Aluminum alloy	White anodized(Integrated clevis style)
③	Cylinder tube	Stainless steel	
④	Piston	Aluminum alloy	Chromated
⑤	Piston rod	Carbon steel	Hard chrome plated
⑥	Bushing	Oil impregnated sintered alloy	
⑦	Seal retainer	Rolled steel	Nickel plated
⑧	Return spring	Steel wire	Zinc chromated
⑨	Spring guide	Aluminum alloy	Chromated
⑩	Spring sead	Aluminum alloy	Chromated
⑪	Plug with needle	Alloy steel	Black zinc chromated
⑫	Snap ring	Carbon steel	Nickel plated

No.	Description	Material	Note
⑬	Bush for clevis	Oil impregnated sintered alloy	
⑭	Bumper	Urethane	
⑮	Bumper A	Urethane	
⑯	Bumper B	Urethane	
⑰	Snap ring	Stainless steel	
⑱	Piston seal	NBR	
⑲	Piston gasket	NBR	
⑳	Wearing	Resin	
㉑	Mounting nut	Carbon steel	Nickel plated
㉒	Rod end nut	Carbon steel	Nickel plated

## Replacement Parts

### • With rubber bumper/Built-in One-touch fitting

No.	Description	Material	Bore size(mm)/Part No.			
			20	25	32	40
㉓	Rod seal	NBR	PDU-8Z	PDU-10Z	PDU-12LZ	PDU-14LZ

CJ1
CJP
CJ2
CM2
C85
C76
CG1
MB
MB1
CP95
C95
C92
CA1
CS1





# Series CM2



## Basic (B)

CM2B Bore size — Stroke  $\frac{S}{T}$


### Spring return

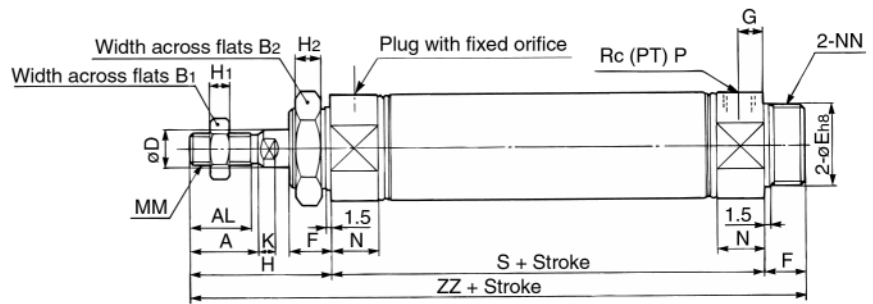



### Spring extend

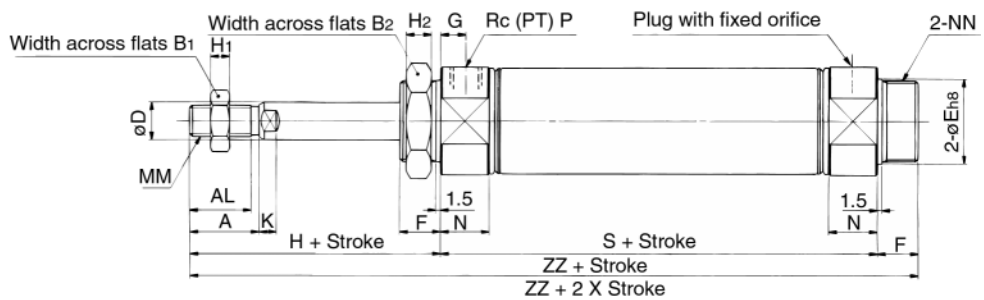

### Boss-cut style

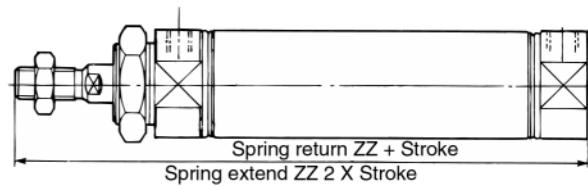

### Built-in One-touch fitting

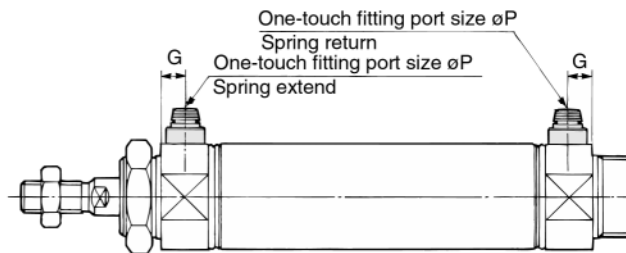

Bore	A	AL	B1	B2	D	E	F	G	H	H1	H2	I	K	MM	N	NA	NN	P
20	18	15.5	13	26	8	20 <sub>-0.033</sub>	13	8	41	5	8	28	5	M8 X 1.25	15	24	M20 X 1.5	1/8
25	22	19.5	17	32	10	26 <sub>-0.033</sub>	13	8	45	6	8	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	1/8
32	22	19.5	17	32	12	26 <sub>-0.033</sub>	13	8	45	6	8	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	1/8
40	24	21	22	41	14	32 <sub>-0.039</sub>	16	11	50	8	10	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	1/4

### Dimensions by stroke

Stroke Symbol Bore	1 to 50		51 to 100		101 to 150		151 to 200		201 to 250	
	S	ZZ	S	ZZ	S	ZZ	S	ZZ	S	ZZ
20	87	141	112	166	137	191	—	—	—	—
25	87	145	112	170	137	195	—	—	—	—
32	89	147	114	172	139	197	164	222	—	—
40	113	179	138	204	163	229	188	254	213	279

### Boss-cut style

Stroke Symbol	(mm)				
	1 to 50	51 to 100	101 to 150	151 to 200	201 to 250
Bore	ZZ	ZZ	ZZ	ZZ	ZZ
20	128	153	178	—	—
25	132	157	182	—	—
32	134	159	184	209	—
40	163	188	213	238	263

### Built-in One-touch fitting


Bore	G	P	Q
20	8	6	23
25	8	6	26
32	8	6	28.5
40	11	8	32.5

# Standard: Single Acting Spring Return/Extend **Series CM2**


## Axial Foot (L)

CM2L Bore size — Stroke  $\frac{S}{T}$


Spring return

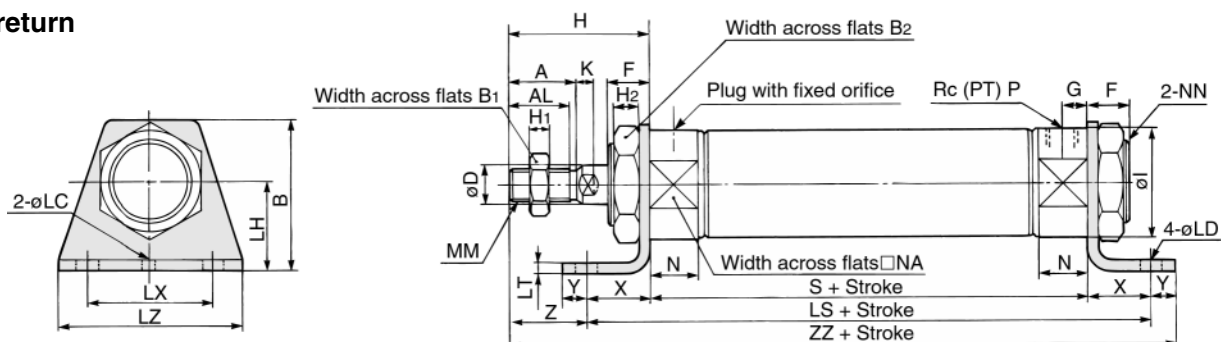

Spring extend

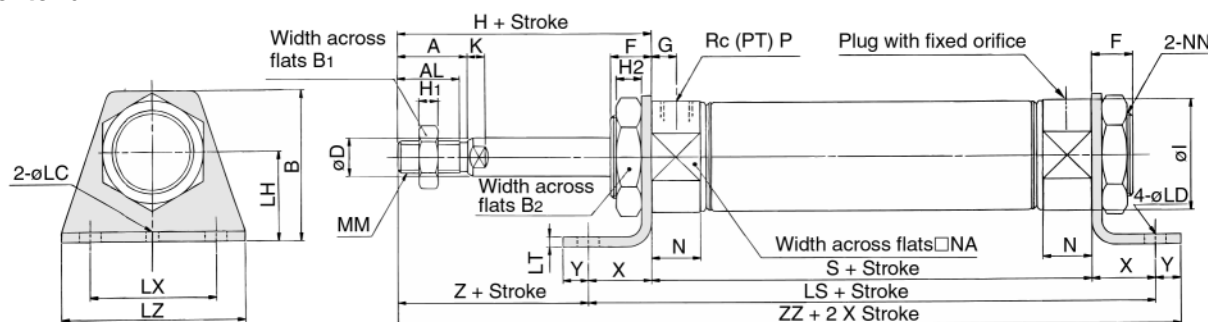

Built-in One-touch fitting

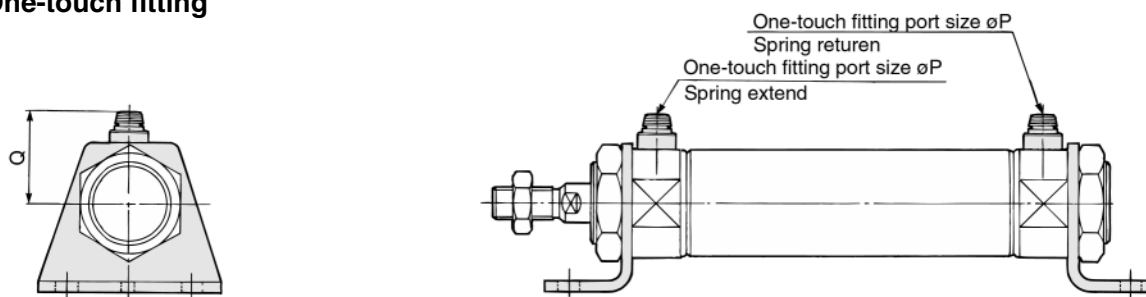

Bore	A	AL	B	B1	B2	D	F	G	H	H1	H2	I	K	LC	LD	LH	LT	LX	LZ	MM	N	NA	NN	P	X	Y	Z
20	18	15.5	40	13	26	8	13	8	41	5	8	28	5	4	6.8	25	3.2	40	55	M8 X 1.25	15	24	M20 X 1.5	1/8	20	8	21
25	22	19.5	47	17	32	10	13	8	45	6	8	33.5	5.5	4	6.8	28	3.2	40	55	M10 X 1.25	15	30	M26 X 1.5	1/8	20	8	25
32	22	19.5	47	17	32	12	13	8	45	6	8	37.5	5.5	4	6.8	28	3.2	40	55	M10 X 1.25	15	34.5	M26 X 1.5	1/8	20	8	25
40	24	21	54	22	41	14	16	11	50	8	10	46.5	7	4	7	30	3.2	55	75	M14 X 1.5	21.5	42.5	M32 X 2	1/4	23	10	27

### Dimensions by stroke

Stroke Symbol	(mm)															
	1 to 50				51 to 100				101 to 150				151 to 200			
Bore	LS	S	ZZ	LS	S	ZZ	LS	S	ZZ	LS	S	ZZ	LS	S	ZZ	LS
20	127	87	156	152	112	181	177	137	206	—	—	—	—	—	—	—
25	127	87	160	152	112	185	177	137	210	—	—	—	—	—	—	—
32	129	89	162	154	114	187	179	139	212	204	164	237	—	—	—	—
40	159	113	196	184	138	221	209	163	246	234	188	271	259	213	296	—

### Built-in One-touch fitting


Bore	P	Q
20	6	23
25	6	26
32	6	28.5
40	8	32.5

# Series CM2


## Front Flange (F)

CM2F Bore size Stroke  $\frac{S}{T}$


### Spring return

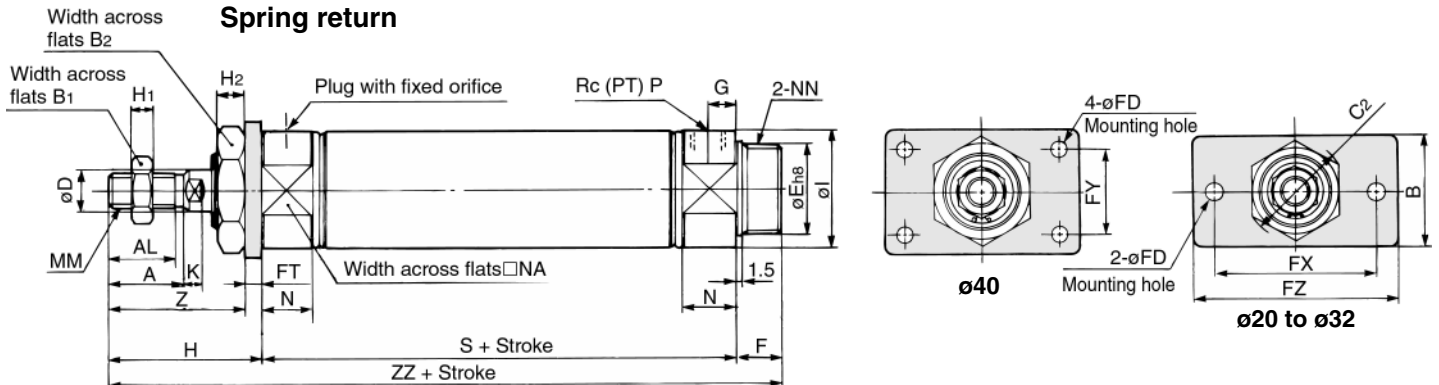


### Spring extend

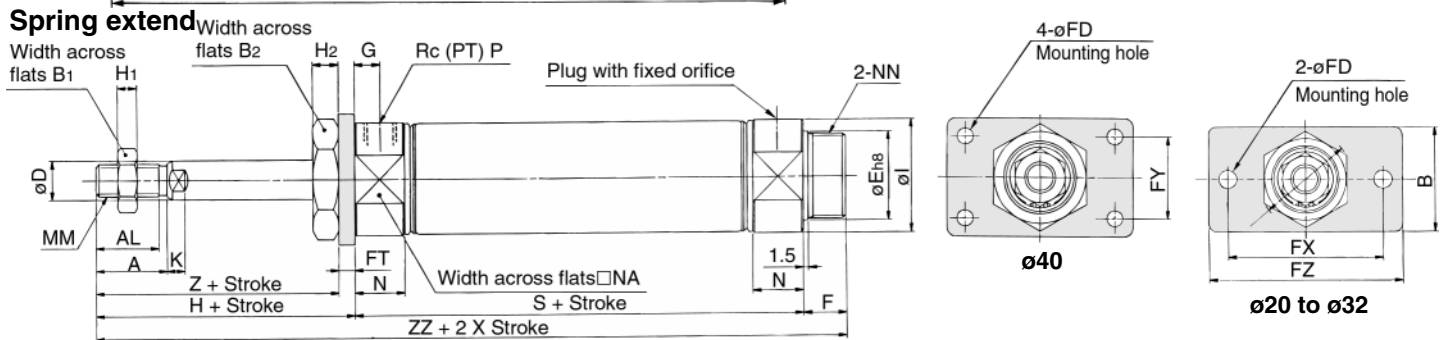

### Boss-cut

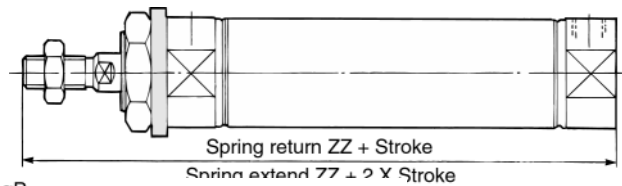

### Built-in One-touch fitting

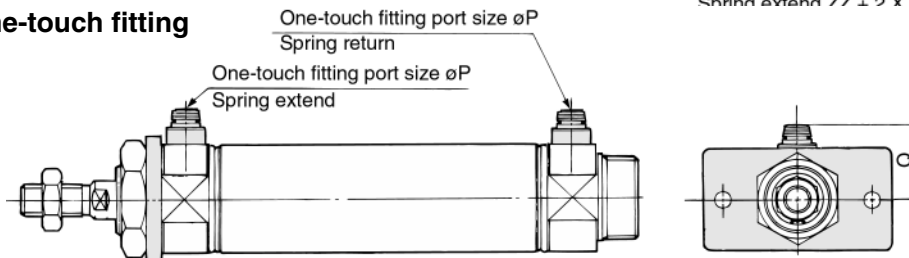

(mm)																										
Bore	A	AL	B	B1	B2	C2	D	E	F	FD	FT	FX	FY	FZ	G	H	H1	H2	I	K	MM	N	NA	NN	P	Z
20	18	15.5	34	13	26	30	8	20 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	41	5	8	28	5	M8 X 1.25	15	24	M20 X 1.5	1/8	37
25	22	19.5	40	17	32	37	10	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	45	6	8	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	1/8	41
32	22	19.5	40	17	32	37	12	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	45	6	8	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	1/8	41
40	24	21	52	22	41	47.3	14	32 <sup>0</sup> <sub>-0.039</sub>	16	7	5	66	36	82	11	50	8	10	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	1/4	45

### Dimensions by stroke

(mm)

Bore	Stroke		1 to 50		51 to 100		101 to 150		151 to 200		201 to 250	
	Symbol		S	ZZ	S	ZZ	S	ZZ	S	ZZ	S	ZZ
20			87	141	112	166	137	191	—	—	—	—
25			87	145	112	170	137	195	—	—	—	—
32			89	147	114	172	139	197	164	222	—	—
40			113	179	138	204	163	229	188	254	213	279

### Boss-cut

(mm)

Bore	Stroke		1 to 50		51 to 100		101 to 150		151 to 200		201 to 250	
	Symbol		ZZ		ZZ		ZZ		ZZ		ZZ	
20			128		153		178		—		—	
25			132		157		182		—		—	
32			134		159		184		209		—	
40			163		188		213		238		263	

### Built-in One-touch fitting


Bore	P	Q
20	6	23
25	6	26
32	6	28.5
40	8	32.5

# Standard: Single Acting Spring Return/Extend **Series CM2**


## Rear Flange (G)

CM2G Bore size Stroke  $\frac{S}{T}$


### Spring return

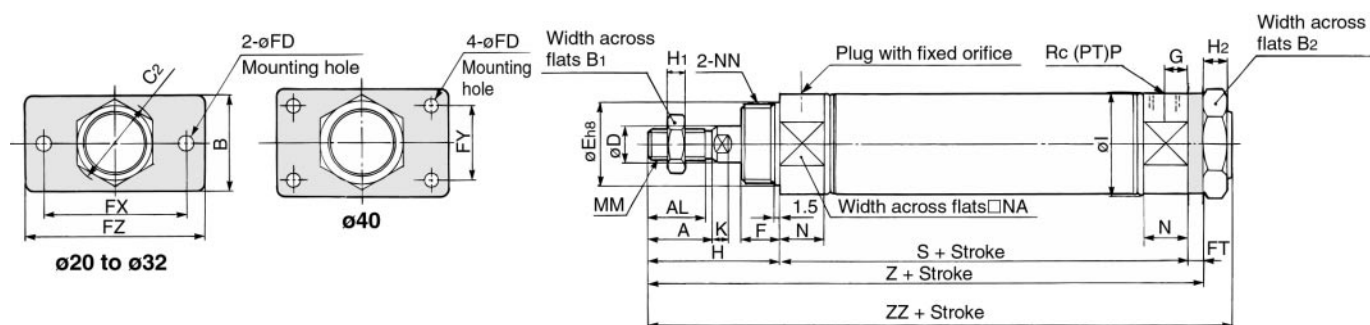

### Spring extend

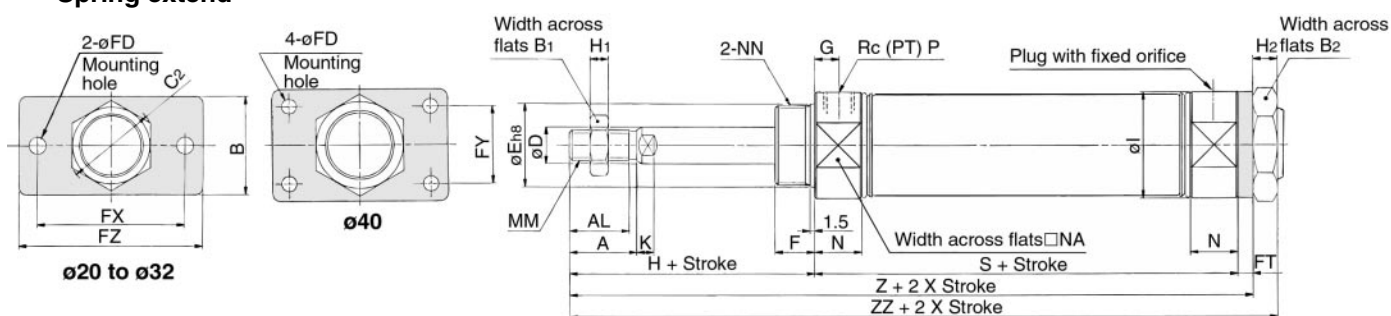

### Built-in One-touch fitting

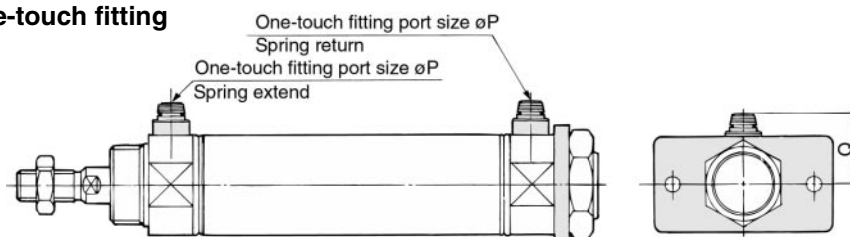

Bore	A	AL	B	B1	B2	C2	D	E	F	FD	FT	FX	FY	FZ	G	H	H1	H2	I	K	MM	N	NA	NN	P
20	18	15.5	34	13	26	30	8	20 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	41	5	8	28	5	M8 X 1.25	15	24	M20 X 1.5	1/8
25	22	19.5	40	17	32	37	10	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	45	6	8	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	1/8
32	22	19.5	40	17	32	37	12	26 <sup>0</sup> <sub>-0.033</sub>	13	7	4	60	—	75	8	45	6	8	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	1/8
40	24	21	52	22	41	47.3	14	32 <sup>0</sup> <sub>-0.039</sub>	16	7	5	66	36	82	11	50	8	10	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	1/4

### Dimensions by stroke

Stroke Symbol													(mm)		
Bore	1 to 50			51 to 100			101 to 150			151 to 200			201 to 250		
	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ
20	87	132	141	112	157	166	137	182	191	—	—	—	—	—	—
25	87	136	145	112	161	170	137	186	195	—	—	—	—	—	—
32	89	138	147	114	163	172	139	188	197	164	213	222	—	—	—
40	113	168	179	138	193	204	163	218	229	188	243	254	213	268	279

### Built-in One-touch fitting


Bore	P	Q
20	6	23
25	6	26
32	6	28.5
40	8	32.5

# Series CM2


## Single Clevis (C)

CM2C Bore size Stroke  $\frac{S}{T}$


### Spring return

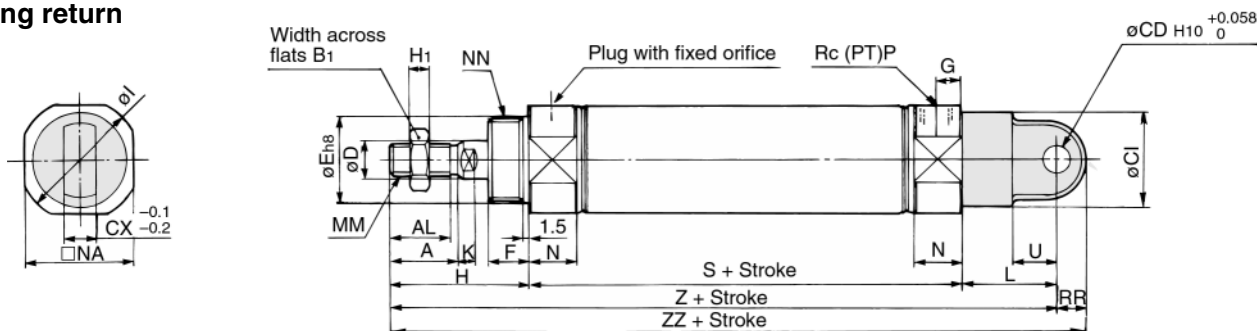

### Spring extend

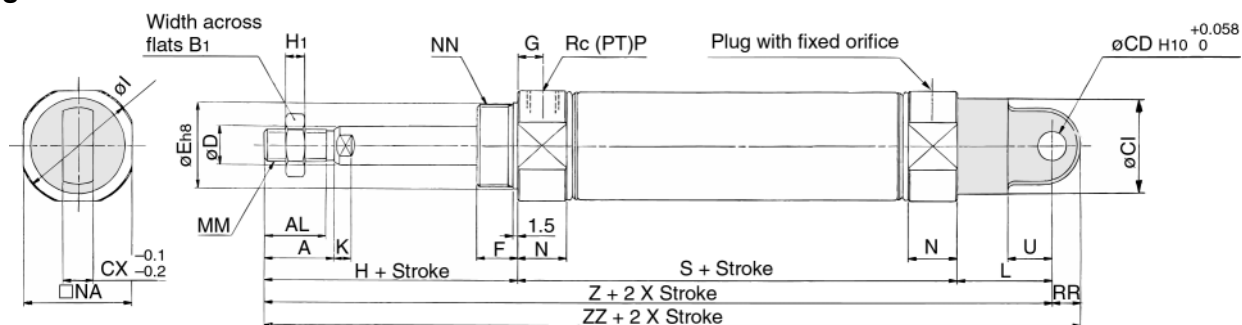

### Built-in One-touch fitting

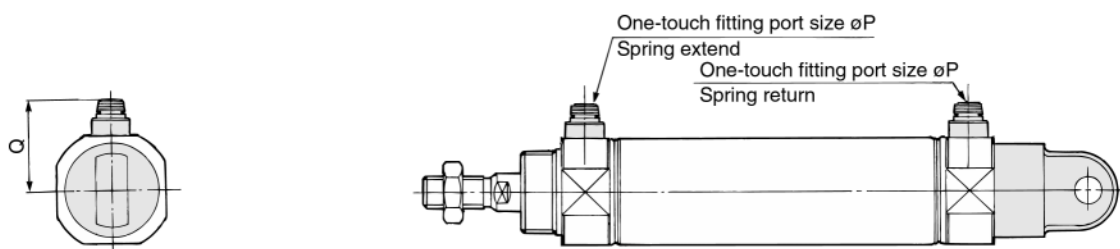

Bore	A	AL	B1	CD	CI	CX	D	E	F	G	H	H1	I	K	L	MM	N	NA	NN	P	RR	U
20	18	15.5	13	9	24	10	8	20 $\begin{smallmatrix} 0 \\ -0.033 \end{smallmatrix}$	13	8	41	5	28	5	30	M8 X 1.25	15	24	M20 X 1.5	$\frac{1}{8}$	9	14
25	22	19.5	17	9	30	10	10	26 $\begin{smallmatrix} 0 \\ -0.033 \end{smallmatrix}$	13	8	45	6	33.5	5.5	30	M10 X 1.25	15	30	M26 X 1.5	$\frac{1}{8}$	9	14
32	22	19.5	17	9	30	10	12	26 $\begin{smallmatrix} 0 \\ -0.033 \end{smallmatrix}$	13	8	45	6	37.5	5.5	30	M10 X 1.25	15	34.5	M26 X 1.5	$\frac{1}{8}$	9	14
40	24	21	22	10	38	15	14	32 $\begin{smallmatrix} 0 \\ -0.039 \end{smallmatrix}$	16	11	50	8	46.5	7	39	M14 X 1.5	21.5	42.5	M32 X 2	$\frac{1}{4}$	11	18

### Dimensions by stroke

		(mm)														
Stroke Symbol	Bore	1 to 50			51 to 100			101 to 150			151 to 200			201 to 250		
		S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ
	20	87	158	167	112	183	192	137	208	217	—	—	—	—	—	—
	25	87	162	171	112	187	196	137	212	221	—	—	—	—	—	—
	32	89	164	173	114	189	198	139	214	223	164	239	248	—	—	—
	40	113	202	213	138	227	238	163	252	263	188	277	288	213	302	313

### Built-in One-touch fitting


Bore	P	Q
20	6	23
25	6	26
32	6	28.5
40	8	32.5

# Standard: Single Acting Spring Return/Extend *Series CM2*


## Double Clevis (D)

CM2D Bore size Stroke S T


### Spring return

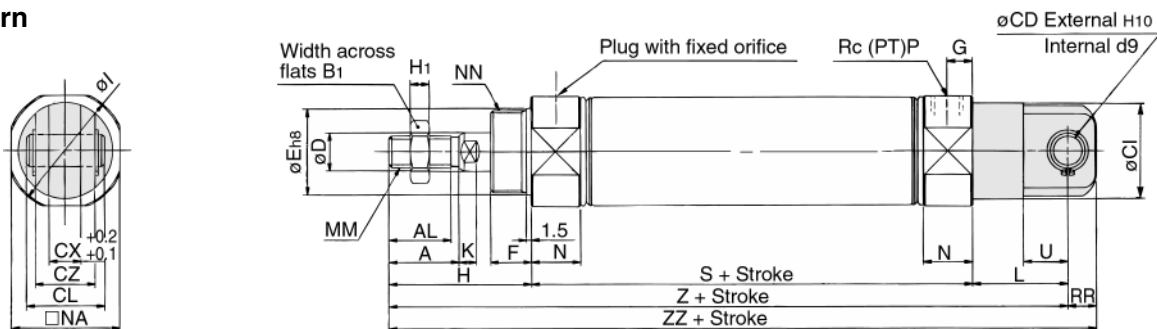

### Spring extend

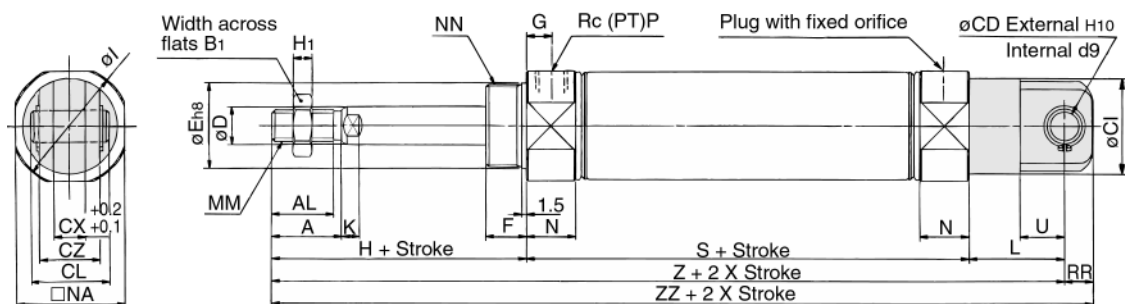

### Built-in One-touch fitting

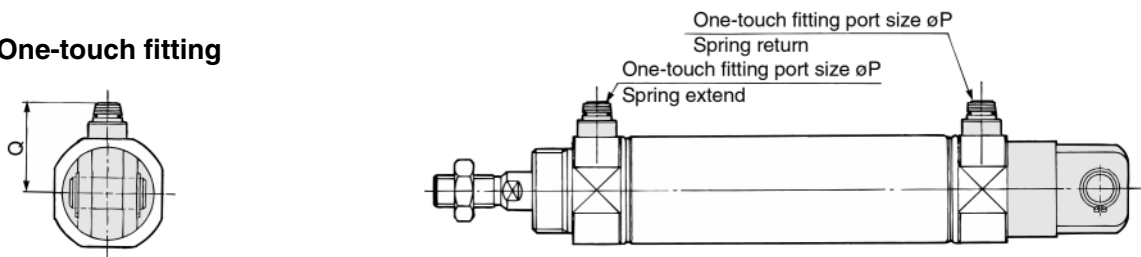

Bore	A	AL	B1	CD	CI	CL	CX	CZ	D	E	F	G	H	H1	I	K	L	MM	N	NA	NN	P	RR	U
20	18	15.5	13	9	24	25	10	19	8	20 <sup>0</sup> <sub>-0.033</sub>	13	8	41	5	28	5	30	M8 X 1.25	15	24	M20 X 1.5	<sup>1</sup> / <sub>8</sub>	9	14
25	22	19.5	17	9	30	25	10	19	10	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	33.5	5.5	30	M10 X 1.25	15	30	M26 X 1.5	<sup>1</sup> / <sub>8</sub>	9	14
32	22	19.5	17	9	30	25	10	19	12	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	37.5	5.5	30	M10 X 1.25	15	34.5	M26 X 1.5	<sup>1</sup> / <sub>8</sub>	9	14
40	24	21	22	10	38	41.2	15	30	14	32 <sup>0</sup> <sub>-0.039</sub>	16	11	50	8	46.5	7	39	M14 X 1.5	21.5	42.5	M32 X 2	<sup>1</sup> / <sub>4</sub>	11	18

**Dimensions by stroke** \* Clevis pins and snap rings (cotter pins for bore size 40) are attached. (mm)

Stroke	1 to 50			51 to 100			101 to 150			151 to 200			201 to 250		
Bore	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ
20	87	158	167	112	183	192	137	208	217	—	—	—	—	—	—
25	87	162	171	112	187	196	137	212	221	—	—	—	—	—	—
32	89	164	173	114	189	198	139	214	223	164	239	248	—	—	—
40	113	202	213	138	227	238	163	252	263	188	277	288	213	302	313

**Built-in One-touch fitting**

Bore	P	Q
20	6	23
25	6	26
32	6	28.5
40	8	32.5




# Series CM2


## Front Trunnion (U)

CM2U Bore size Stroke  $\frac{S}{T}$


### Spring return

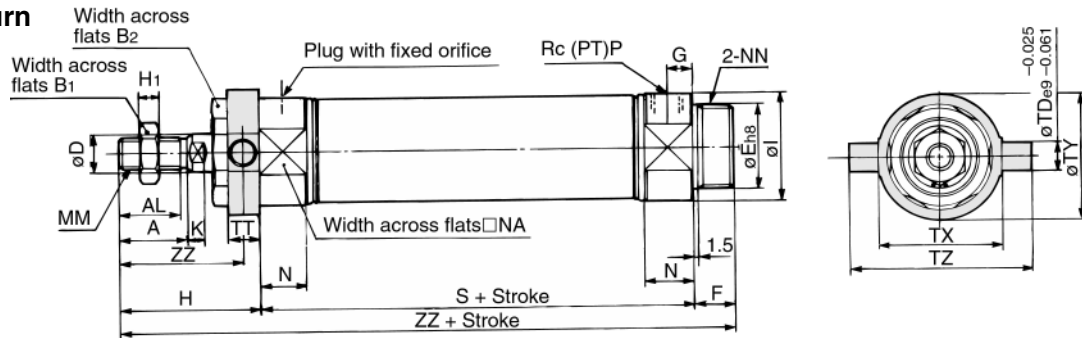


### Spring extend

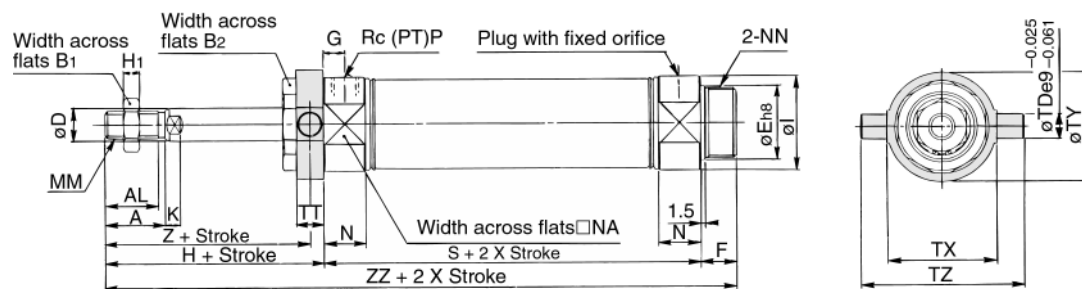

### Boss-cut style

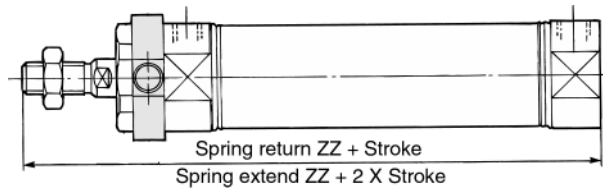

### Built-in One-touch fitting

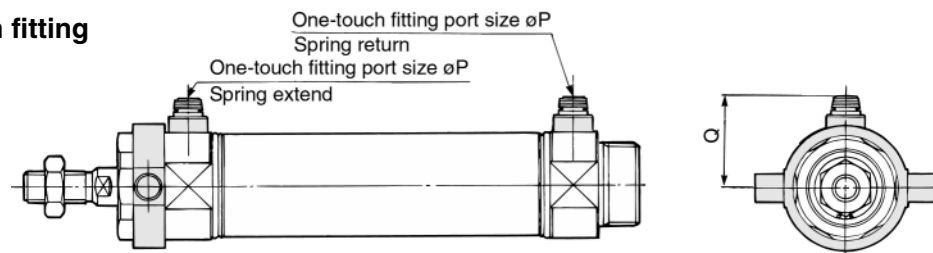

(mm)																							
Bore	A	AL	B1	B2	D	E	F	G	H	H1	I	K	MM	N	NA	NN	P	TD	TT	TX	TY	TZ	Z
20	18	15.5	13	26	8	20 <sup>0</sup> <sub>-0.033</sub>	13	8	41	5	28	5	M8 X 1.25	15	24	M20 X 1.5	1/8	8	10	32	32	52	36
25	22	19.5	17	32	10	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	1/8	9	10	40	40	60	40
32	22	19.5	17	32	12	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	1/8	9	10	40	40	60	40
40	24	21	22	41	14	32 <sup>0</sup> <sub>-0.039</sub>	16	11	50	8	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	1/4	10	11	53	53	77	44.5

### Dimensions by stroke

(mm)									
Stroke Symbol	1 to 50	51 to 100	101 to 150	151 to 200	201 to 250				
Bore	S	ZZ	S	ZZ	S	ZZ	S	ZZ	S
20	87	141	112	166	137	191	—	—	—
25	87	145	112	170	137	195	—	—	—
32	89	147	114	172	139	197	164	222	—
40	113	179	138	204	163	229	188	254	213

### Boss-cut

(mm)					
Stroke Symbol	1 to 50	51 to 100	101 to 150	151 to 200	201 to 250
Bore	ZZ	ZZ	ZZ	ZZ	ZZ
20	128	153	178	—	—
25	132	157	182	—	—
32	134	159	184	209	—
40	163	188	213	238	263

### Built-in One-touch fitting



Bore	P	Q
20	6	23
25	6	26
32	6	28.5
40	8	32.5

# Standard: Single Acting Spring Return/Extend *Series CM2*



## Rear Trunnion (T)

CM2T Bore size Stroke  $\frac{S}{T}$



### Spring return

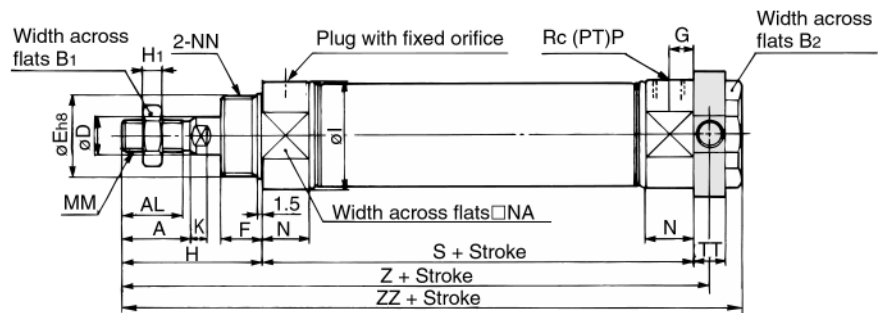

### Spring extend

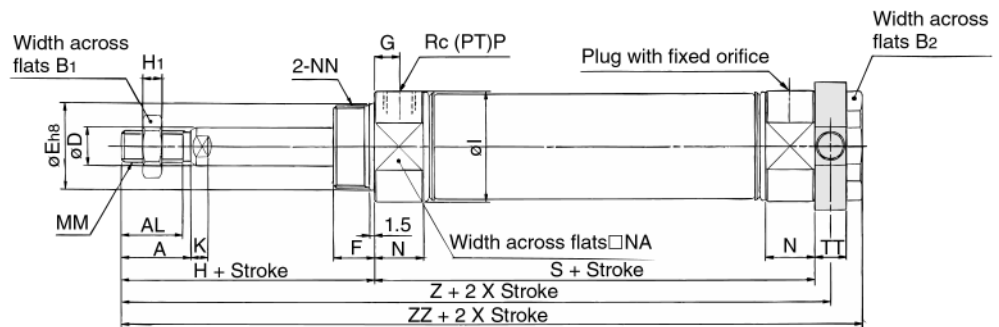

### Built-in One-touch fitting

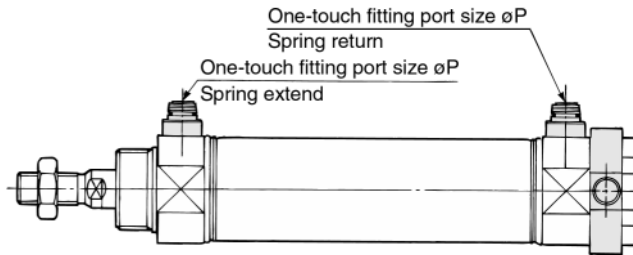

Bore	A	AL	B1	B2	D	E	F	G	H	H1	I	K	MM	N	NA	NN	P	TD	TT	TX	TY	TZ
20	18	15.5	13	26	8	20 <sub>-0.033</sub>	13	8	41	5	28	5	M8 X 1.25	15	24	M20 X 1.5	1/8	8	10	32	32	52
25	22	19.5	17	32	10	26 <sub>-0.033</sub>	13	8	45	6	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	1/8	9	10	40	40	60
32	22	19.5	17	32	12	26 <sub>-0.033</sub>	13	8	45	6	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	1/8	9	10	40	40	60
40	24	21	22	41	14	32 <sub>-0.039</sub>	16	11	50	8	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	1/4	10	11	53	53	77

### Dimensions by stroke

Stroke Symbol	1 to 50			51 to 100			101 to 150			151 to 200			201 to 250		
Bore	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ
20	87	133	143	112	158	168	137	183	193	—	—	—	—	—	—
25	87	137	147	112	162	172	137	187	197	—	—	—	—	—	—
32	89	139	149	114	164	174	139	189	199	164	214	224	—	—	—
40	113	168.5	179	138	193.5	204	163	218.5	229	188	243.5	254	213	268.5	279

### Built-in One-touch fitting



Bore	P	Q
20	6	23
25	6	26
32	6	28.5
40	8	32.5

# Series CM2



## Integrated Clevis (E)

CM2E Bore size — Stroke  $\frac{S}{T}$



### Spring return

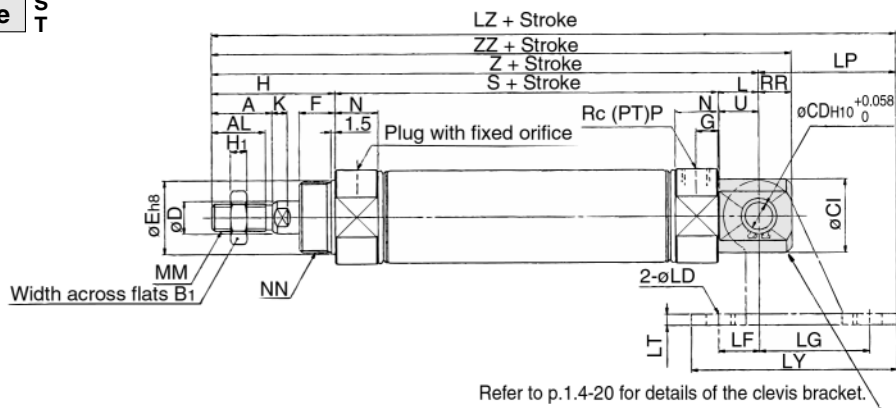

### Spring extend

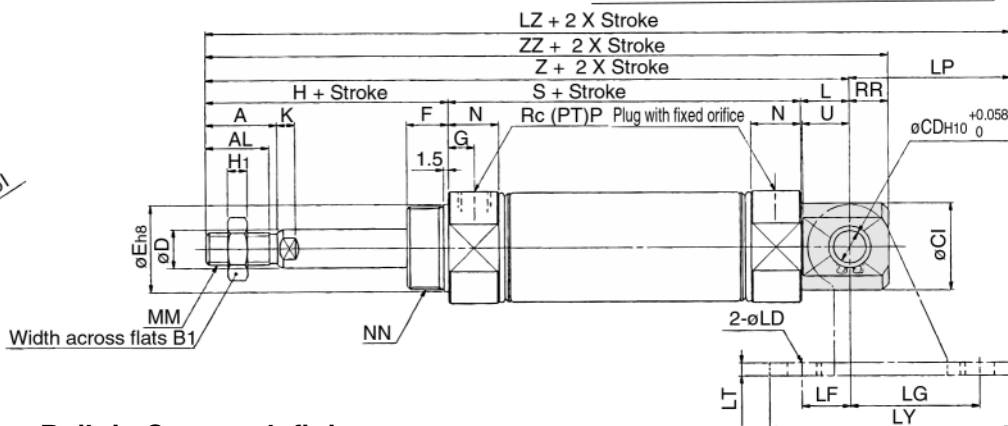

### Built-in One-touch fitting

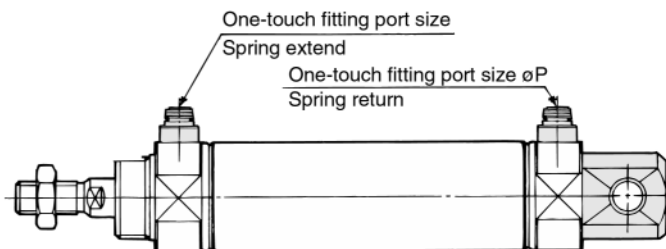

(mm)																				
Bore	A	AL	B1	CD	CI	CX	D	E	F	G	H	H1	I	K	L	MM	N	NA	NN	P
20	18	15.5	13	8	20	12	8	20 <sup>0</sup> <sub>-0.033</sub>	13	8	41	5	28	5	12	M8 X 1.25	15	24	M20 X 1.5	1/8
25	22	19.5	17	8	22	12	10	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	33.5	5.5	12	M10 X 1.25	15	30	M26 X 1.5	1/8
32	22	19.5	17	10	27	20	12	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	37.5	5.5	15	M10 X 1.25	15	34.5	M26 X 1.5	1/8
40	24	21	22	10	33	20	14	32 <sup>0</sup> <sub>-0.039</sub>	16	11	50	8	46.5	7	15	M14 X 1.5	21.5	42.5	M32 X 2	1/4

### Dimensions by stroke

		(mm)																	
Bore	Stroke Symbol	1 to 50			51 to 100			101 to 150			151 to 200			201 to 250					
		S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ	S	Z	ZZ			
20		87	140	149	112	165	174	137	190	199	—	—	—	—	—	—			
25		87	144	153	112	169	178	137	194	203	—	—	—	—	—	—			
32		89	149	161	114	174	186	139	199	211	164	224	236	—	—	—			
40		113	178	190	138	203	215	163	228	240	188	253	265	213	278	290			

### Pivot bracket

									(mm)				
Bore	LD	LF	LG	LH	LP	LT	LV	LY	1 to 50	51 to 100	101 to 150	151 to 200	201 to 250
									LZ	LZ	LZ	LZ	LZ
20	6.8	15	30	30	37	3.2	18.4	59	177	202	227	—	—
25	6.8	15	30	30	37	3.2	18.4	59	181	206	231	—	—
32	9	15	40	40	50	4	28	75	199	224	249	274	—
40	9	15	40	40	50	4	28	75	228	253	278	303	328


### Built-in One-touch fitting

Bore	P	Q
20	6	23
25	6	26
32	6	28.5
40	8	32.5


## Auto Switch Mounting Position and Mounting Height: Spring Return (S)

### Reed Switch


D-C7/C8

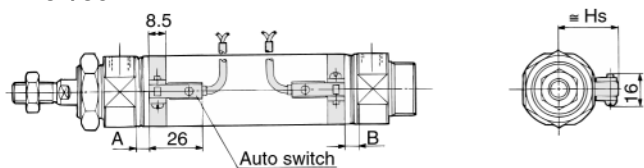


D-B5/B6/B59W

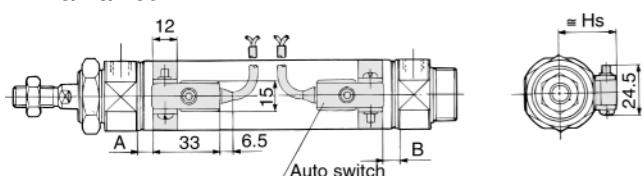


D-A33A/A34A

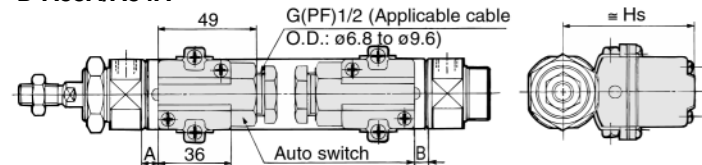

D-A44A

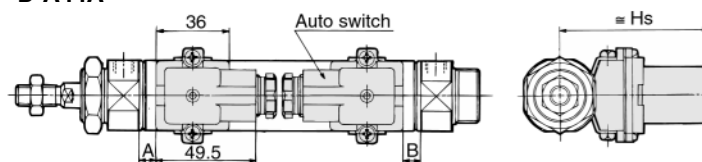


D-C73C/C80C

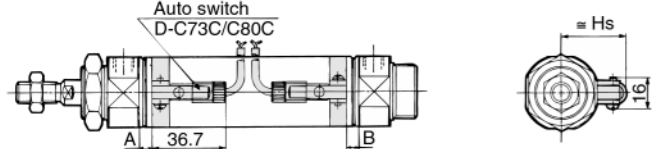


### Solid State Switch

D-H7□/H7□W  
D-H7□F/H7BAL

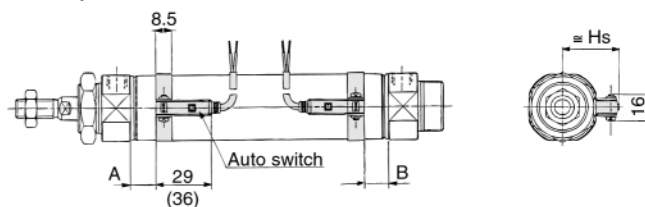


\*( ): D-H7LF


D-G5NTL

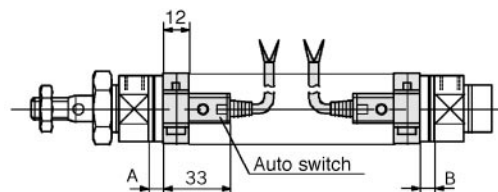

D-G39A  
D-K39A

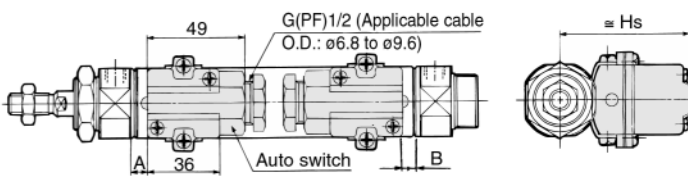

D-H7C

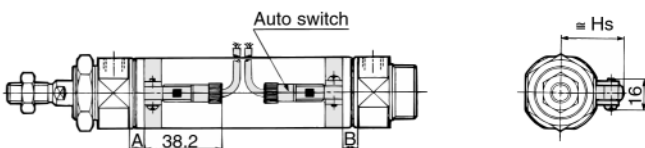

### Auto Switch Position: Spring Return (S)

Auto switch model	Bore size	A dimensions					B
		to 50	51 to 100	101 to 150	151 to 200	200 to 250	
D-B5 D-B6	20	26	51	76	—	—	0
	25	26	51	76	—	—	0
	32	27	52	77	102	—	1
	40	32	57	82	107	132	6
D-C7 D-C8 D-C73C D-C80C	20	32	57	82	—	—	6
	25	32	57	82	—	—	6
	32	33	58	83	108	—	7
	40	38	63	88	113	138	12
D-B59W	20	29	54	79	—	—	3
	25	29	54	79	—	—	3
	32	30	55	80	105	—	4
	40	35	60	85	110	135	9
D-A3□A D-G39A D-K39A D-A44A	20	25.5	50.5	75.5	—	—	0
	25	25.5	50.5	75.5	—	—	0
	32	26.5	51.5	76.5	101.5	—	0.5
	40	31.5	56.5	81.5	106.5	131.5	5.5
D-H7□ D-H7C	20	31	56	81	—	—	5
	25	31	56	81	—	—	5
	32	32	57	82	107	—	6
	40	37	62	87	112	137	11
D-H7□W D-H7BAL D-H7□F	20	29.5	54.5	79.5	—	—	3.5
	25	29.5	54.5	79.5	—	—	3.5
	32	30.5	55.5	80.5	105.5	—	4.5
	40	35.5	60.5	85.5	110.5	135.5	9.5
D-G5NTL	20	27.5	52.5	77.5	—	—	1.5
	25	27.5	52.5	77.5	—	—	1.5
	32	28.5	53.5	78.5	103.5	—	2.5
	40	33.5	58.5	83.5	108.5	133.5	7.5

### Mounting Height

Auto switch model	Bore size	Hs
D-B5 D-B6 D-B59W D-G5NTL	20	25.5
	25	28
	32	31.5
	40	35.5
D-C7/C8 D-H7□ D-H7□W D-H7BAL D-H7□F	20	22.5
	25	25
	32	28.5
	40	32.5
D-C73C D-C80C D-H7C	20	25
	25	27.5
	32	31
	40	35
D-A3□A D-G39A D-K39A	20	60
	25	62.5
	32	66
	40	70
D-A44A	20	69.5
	25	72
	32	75.5
	40	79.5

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1


# Series CDM2

## Auto Switch Mounting Position and Mounting Height: Spring Extend (T)


### Reed Switch

### Solid State Switch


D-C7/C8

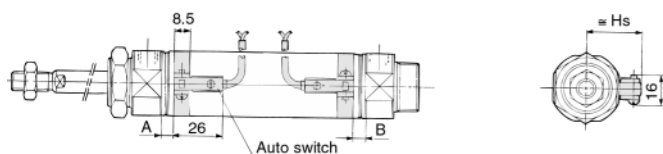


D-B5/B6/B59W

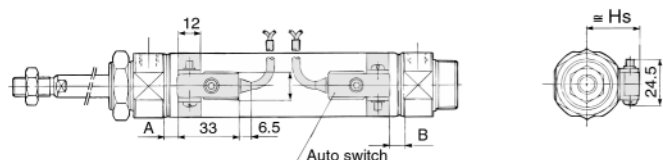


D-A33A/A34A

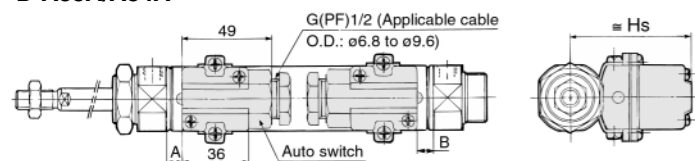


D-A44A

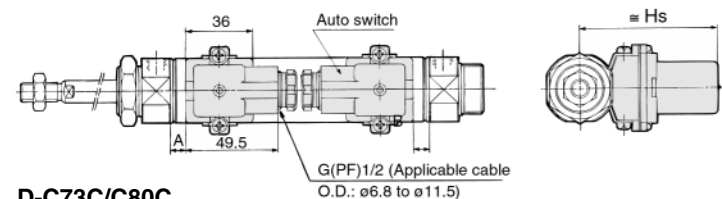


D-C73C/C80C

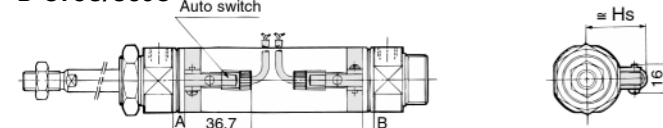

D-H7□/H7□W  
D-H7□F/H7BAL

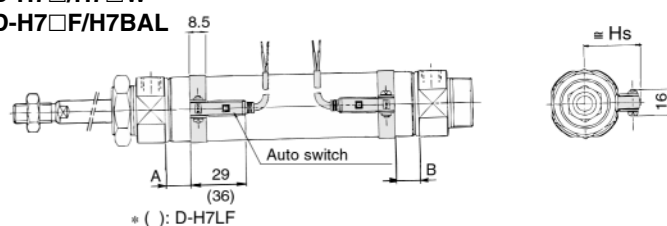


D-G5NTL

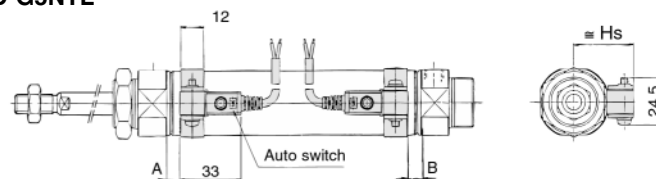


D-G39A

D-K39A

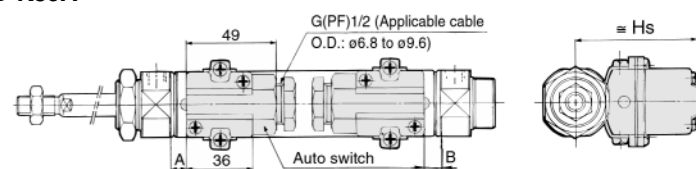

D-H7C

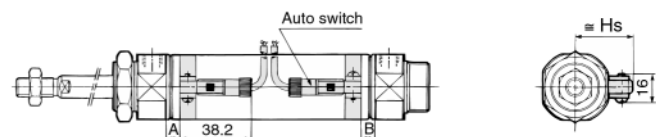

### Auto Switch Position: Spring Extend (T)

(mm)

### Mounting Height

(mm)

Auto switch model	Bore size (mm)	A	B dimensions				
			to 50	51 to 100	101 to 150	151 to 200	200 to 250
D-B5 D-B6	20	1	25	50	75	—	—
	25	1	25	50	75	—	—
	32	2	26	51	76	101	—
	40	7	31	56	81	106	131
D-C7 D-C8 D-C73C D-C80C	20	7	31	56	81	—	—
	25	7	31	56	81	—	—
	32	8	32	57	82	107	—
	40	13	37	62	87	112	137
D-B59W	20	4	28	53	78	—	—
	25	4	28	53	78	—	—
	32	5	29	54	79	104	—
	40	10	34	59	84	109	134
D-A3□A D-G39A D-K39A D-A44A	20	0.5	24.5	49.5	74.5	—	—
	25	0.5	24.5	49.5	74.5	—	—
	32	1.5	25.5	50.5	75.5	100.5	—
	40	6.5	30.5	55.5	80.5	105.5	130.5
D-H7□ D-H7C	20	6	30	55	80	—	—
	25	6	30	55	80	—	—
	32	7	31	56	81	106	—
	40	12	36	61	86	111	136
D-H7□W D-H7BAL D-H7□F	20	4.5	28.5	53.5	78.5	—	—
	25	4.5	28.5	53.5	78.5	—	—
	32	5.5	29.5	54.5	79.5	104.5	—
	40	10.5	34.5	59.5	83.5	109.5	134.5
D-G5NTL	20	2.5	26.5	51.5	76.5	—	—
	25	2.5	26.5	51.5	76.5	—	—
	32	3.5	27.5	52.5	77.5	102.5	—
	40	8.5	32.5	57.5	81.5	107.5	132.5

Auto switch model	Bore size (mm)	≅ Hs
D-B5 D-B6 D-B59W D-G5NTL	20	25.5
	25	28
	32	31.5
	40	35.5
D-C7/C8 D-H7□ D-H7□W D-H7BAL D-H7□F	20	22.5
	25	25
	32	28.5
	40	32.5
D-C73C D-C80C D-H7C	20	25
	25	27.5
	32	31
	40	35
D-A3□A D-G39A D-K39A	20	60
	25	62.5
	32	66
	40	70
D-A44A	20	69.5
	25	72
	32	75.5
	40	79.5

# Non-rotating Rod: Double Acting Single Rod

## Series CM2K

ø20, ø25, ø32, ø40

### How to Order

**Mounting**

<b>B</b>	Basic	<b>T</b>	Rear trunnion
<b>L</b>	Axial foot	<b>E</b>	Integrated clevis
<b>F</b>	Front flange	<b>BZ</b>	Boss-cut basic
<b>G</b>	Rear flange	<b>FZ</b>	Boss-cut front flange
<b>C</b>	Single clevis		
<b>D</b>	Double clevis		
<b>U</b>	Front trunnion	<b>UZ</b>	Boss-cut front trunnion

**Cylinder stroke(mm)**  
Refer to p.1.4-51 for Standard Stroke Table.

**Cushion**

—	Rubber bumper
<b>A</b>	Air cushion

**Standard** CM2K **L** **40** — **150** **A** **J**

**With auto switch** CDM2K **L** **40** — **150** **A** **J** — **C73** **[ ]**

**Bore size**

<b>20</b>	20mm
<b>25</b>	25mm
<b>32</b>	32mm
<b>40</b>	40mm

**Number of auto switches**

—	2
<b>S</b>	1
<b>n</b>	n

**Auto switch**

—	Without auto switch (Built-in magnet)
---	---------------------------------------

\* Refer to the table below for selecting applicable auto switches.

**Air cylinder with auto switch**

**Rod boot**

—	Without rod boot
<b>J</b>	Nylon tarpaulin
<b>K</b>	Heat resistant tarpaulin

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1

### Applicable Auto Switches/Refer to p.5.3-2 for further information on auto switches.

Style	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Auto switch model	Lead wire* (m)				Applicable load	
					DC	AC		0.5 (—)	3 (L)	5 (Z)	None (N)		
Reed switch	—	Grommet	Yes	3 wire (NPN)	—	5V	—	●	●	—	—	IC	—
Solid state switch	—	Grommet	Yes	2 wire	24V	12V	—	●	●	●	●	IC	Relay PLC
Solid state switch	Diagnostic indicator (2colour)	Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	●	●	○	—	IC	Relay PLC
Solid state switch	Water resistant (2colour)	Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	●	●	○	—	IC	Relay PLC
Solid state switch	With timer	Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	●	●	○	—	IC	Relay PLC
Solid state switch	Diagnostic output (2colour)	Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	●	●	○	—	IC	Relay PLC
Solid state switch	Latch with diagnostic output (2colour)	Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	●	●	○	—	IC	Relay PLC



\* Lead wire length

0.5m : —

3m : L

5m : Z

None: N

e.g.) C80CZ, C80CN

\* Solid state switches marked with "○" are manufactured upon receipt of order.

\* Do not indicate symbol "N" for no lead wire on "D-A3□A", "A44A", "G39A" and "K39A" models.





# Series CM2K

A cylinder in which the rod does not rotate because of its hexagonal shape.

**Non-rotating accuracy**  
 $\phi 20, \phi 25$ — $\pm 0.7^\circ$   
 $\phi 32, \phi 40$ — $\pm 0.5^\circ$

Can operate without lubrication.

The same installation dimensions as the standard cylinder.


Auto switches can also be mounted.

It can be installed with auto switches to detect the stroke position of the cylinder.



## JIS symbol

Double acting/Single rod



**Made to Order**

Refer to p.5.4-1 for made to order specifications of series CM2K.

## Specifications

Bore size (mm)	ø20	ø25	ø32	ø40
Rod non-rotating accuracy	±0.7°		±0.5°	
Style	Air cylinder			
Action	Double acting/Single rod			
Fluid	Air			
Cushion	Rubber bumper			
Proof pressure	1.5MPa			
Max. operating pressure	1.0MPa			
Min. operating pressure	0.05MPa			
Ambient and fluid temperature	Without auto switch: -10 to +70°C (No freezing) With auto switch: -10 to +60°C (No freezing)			
Lubrication	Non-lube			
Thread tolerance	JIS class 2			
Stroke tolerance	+1.4 0			
Piston speed (mm/s)	50 to 500			
Allowable kinetic energy	0.27J	0.4J	0.65J	1.2J

## Standard Stroke

Bore size (mm)	Standard stroke (mm) (1)
20	
25	25, 50, 75, 100, 125, 150
32	200, 250, 300
40	



Note 1) Other intermediate strokes can be manufactured upon receipt of order. Contact SMC for longer strokes.

## Minimum Strokes for Auto Switch Mounting

Auto switches can be mounted. Refer to p.1.4-4 for minimum stroke table.

## Rod Boot Materials

Symbol	Material	Max. ambient temp.
J	Nylon tarpaulin	$70^\circ\text{C}$
K	Heat resistant tarpaulin	$110^\circ\text{C}^*$

\* Maximum ambient temperature for the gaiter only.

## Mounting Bracket Part No.

Bore size (mm)	20	25	32	40
Axial foot*	CM-L020B	CM-L032B	CM-L040B	
Flange	CM-F020B	CM-F032B	CM-F040B	
Single clevis	CM-C020B	CM-C032B	CM-C040B	
Double clevis** (with pins)	CM-D020B	CM-D032B	CM-D040B	
Trunnion (with nuts)	CM-T020B	CM-T032B	CM-T040B	

\* Two foot brackets and a mounting nut are attached.

\*\* Clevis pins and snap rings (cotter pins for bore size 40) are attached.

## Auto Switch Mounting Bracket Part No.

Auto switch model	Bore size (mm)			
	20	25	32	40
D-C7/C8 D-H7□	BM2-020	BM2-025	BM2-032	BM2-040
D-B5/B6 D-G5NTL	BA2-020	BA2-025	BA2-032	BA2-040
D-A3□A/A44A D-G39A/K39A	BM3-020	BM3-025	BM3-032	BM3-040



Note) A set of following stainless steel mounting screws is attached. (A switch mounting band is not attached. Please order the band separately.)

BBA3: D-B5/B6/G5

BBA4: D-C7/C8/H7

· "D-H7BAL" switch is set on the cylinder with the screws above when shipped.

When a switch only is shipped, "BBA4" screws are attached.

# Non-rotating Rod: Double Acting Single Rod *Series CM2K*

## Boss-cut Style

Boss for the head cover bracket is eliminated and the total length of cylinder is shortened.



### Comparison of total cylinder length with standard style (mm)

ø20	ø25	ø32	ø40
▲13	▲13	▲13	▲16

## Mounting

- Boss-cut basic (BZ)
- Boss-cut flange (FZ)
- Boss-cut trunnion (UZ)

## Mounting Accessories

Accessories	Standard			Option			
	Mounting nut	Rod end nut	Clevis pin	Single knuckle joint	Double knuckle joint (3)	Pivot bracket	Rod boot
Basic	● (1 pc.)	●	—	●	●	—	●
Axial foot	● (2)	●	—	●	●	—	●
Front flange	● (1)	●	—	●	●	—	●
Rear flange	● (1)	●	—	●	●	—	●
Integrated clevis	— (1)	●	—	●	●	●	●
Single clevis	— (1)	●	—	●	●	—	●
Double clevis (3)	— (1)	●	●	●	●	—	●
Front trunnion	● (1) (2)	●	—	●	●	—	●
Rear trunnion	● (1) (2)	●	—	●	●	—	●
Boss-cut basic	● (1)	●	—	●	●	—	●
Boss-cut flange	● (1)	●	—	●	●	—	●
Boss-cut trunnion	● (1)	●	—	●	●	—	●
Note					With pins	With pins	



Note 1) Mounting nuts are not attached for the integrated clevis, the single clevis, and the double clevis styles.

Note 2) Trunnion nuts are attached for the front trunnion and the rear trunnion style.

Note 3) Pins and snap rings (cotter pins for bore size 40) are attached for double clevis and the double knuckle joint.

## Weight

(kg)

Bore size (mm)		20	25	32	40
Basic weight	Basic	0.14	0.21	0.28	0.57
	Axial foot	0.29	0.37	0.44	0.84
	Flange	0.20	0.30	0.37	0.69
	Integrated clevis	0.12	0.19	0.27	0.53
	Single clevis	0.18	0.25	0.32	0.66
	Double clevis	0.19	0.27	0.33	0.70
	Trunnion	0.18	0.28	0.34	0.67
	Boss-cut basic	0.13	0.19	0.26	0.53
	Boss-cut flange	0.19	0.28	0.35	0.66
	Boss-cut trunnion	0.17	0.26	0.32	0.63
Additional weight by each 50 stroke		0.04	0.07	0.09	0.14
Accessory	Pivot bracket (with pins)	0.07	0.07	0.14	0.14
	Single knuckle joint	0.06	0.06	0.06	0.23
	Double knuckle joint (with pins)	0.07	0.07	0.07	0.20



## Precautions

Be sure to read before handling. Refer to p.0-39 to 0-43 for Safety Instruction and common precautions and refer to p.1.4-5 for those on CM2 series.

### Handling

## Cautions


① Avoid using the air cylinder in such a way that rotational torque would be applied to the piston rod.

If rotational torque is applied, the non-rotating guide will become deformed, thus affecting the non-rotating accuracy.

Refer to the table below for the approximate values of the allowable range of rotational torque.

Allowable rotational torque (Nm)	ø20	ø25	ø32	ø40
	0.2	0.25	0.25	0.44

To screw a bracket or a nut onto the threaded portion at the tip of the piston rod, make sure to retract the piston rod entirely, and place a wrench over the flat portion of the rod that protrudes. To tighten, take precautions to prevent the tightening torque from being applied to the non-rotating guide.

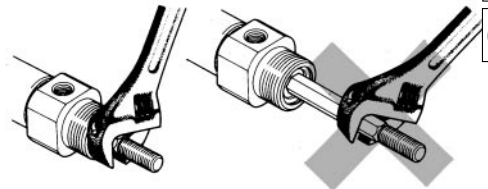

② To replace a rod seal, contact SMC.

A rod seal could lead to an air leak, depending on the position in which it is fitted. Therefore, make sure to contact SMC if a rod seal must be replaced.

Calculation example: CM2KL32-100

● Basic weight: 0.44 (Foot, ø32)

● Additional weight: 0.09/50 stroke

● Cylinder stroke: 100 stroke

$0.44 + 0.09 \times 100/50 = 0.62\text{kg}$

# Series CM2K

## Copper Free

20-CM2K Mounting Bore size Stroke

• Copper free

This cylinder eliminates any influences of copper ions or fluororesins on colour CRTs. Copper materials have been nickel plated or replaced with non-copper materials to prevent the generation of copper ions.



## Specifications

Action	Double acting/Single rod
Bore size	ø20, ø25, ø32, ø40
Max. operating pressure	1.0MPa
Min. operating pressure	0.05MPa
Cushion	Rubber bumper
Piston speed	50 to 500mm/s
Mounting	Basic, Axial foot, Front flange, Rear flange, Single clevis, Double clevis, Front trunnion, Rear trunnion, Integrated clevis, Boss-cut

## With Air Cushion

CM2K Mounting Bore size Stroke A

With air cushion

A cushion mechanism is provided on the cover at both ends to absorb the impact that is created during high speed operations. Thus, it does not transmit vibrations to the surroundings and prolongs the life of the cylinder.



## Specifications

Action	Double acting/Single rod
Bore size	ø20, ø25, ø32, ø40
Max. operating pressure	1.0MPa
Min. operating pressure	0.05MPa
Cushion	Air cushion
Piston speed	50 to 500mm/s
Mounting	Basic, Axial foot, Front flange, Rear flange, Single clevis, Double clevis, Front trunnion, Rear trunnion, Integrated clevis, Boss-cut

\*Auto switches can be mounted.

## Allowable Kinetic Energy

Bore size (mm)	Effective cushion length (mm)	Allowable kinetic energy
20	11.0	0.54J
25	11.0	0.78J
32	11.0	1.27J
40	11.8	2.35J

- Construction: Refer to p.1.4-54.
- Dimensions: Refer to p.1.4-55.
- Refer to p.1.4-51 for other specifications.



## Auto switch mounting position

Refer to the standard type (double acting/single rod) on p.1.4-21.

# Non-rotating Rod: Double Acting Single Rod *Series CM2K*


## Construction

### Rubber bumper

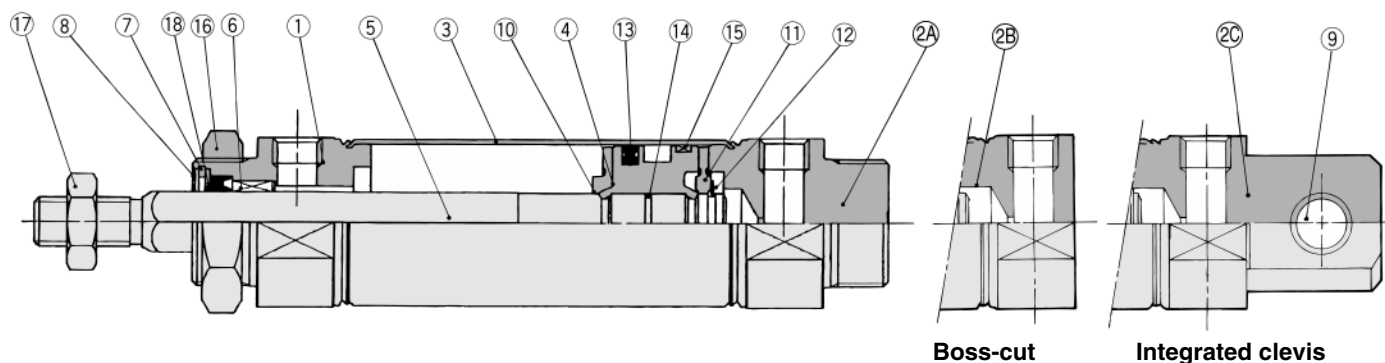

Rod section

### With air cushion

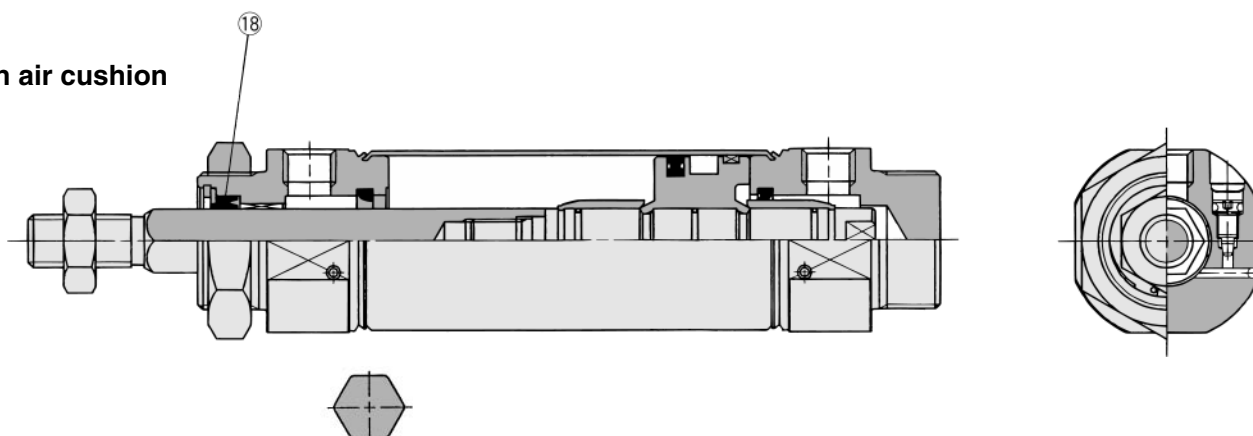

Rod section

### Component Parts

No.	Description	Material	Note
①	Rod cover	Aluminum alloy	White anodized
②A	Head cover A	Aluminum alloy	White anodized(Standard style)
②B	Head cover B	Aluminum alloy	White anodized(Boss-cut style)
②C	Head cover C	Aluminum alloy	White anodized(Integrated clevis style)
③	Cylinder tube	Stainless steel	
④	Piston	Aluminum alloy	Chromated
⑤	Piston rod	Stainless steel	
⑥	Non-rotating guide	Oil impregnated sintered metal	
⑦	Seal retainer	Rolled steel	Nickel plated
⑧	Snap ring	Carbon steel	Nickel plated
⑨	Bushing for clevis	Oil impregnated sintered metal	
⑩	Bumper A	Urethane	
⑪	Bumper B	Urethane	

No.	Description	Material	Note
⑫	Snap ring	Stainless steel	
⑬	Piston seal	NBR	
⑭	Piston gasket	NBR	
⑮	Wearing	Resin	
⑯	Mounting nut	Carbon steel	Nickel plated
⑰	Rod end nut	Carbon steel	Nickel plated

### Replacement Parts


No.	Description	Material	Bore size(mm)/Part No.			
			20	25	32	40
⑰	Rod seal	NBR	PDR-8W	PDR-10W	PDR-12W	PDR-14W

CJ1
CJP
CJ2
CM2
C85
C76
CG1
MB
MB1
CP95
C95
C92
CA1
CS1

# Series CM2K

## Basic (B)


CM2KB Bore size Stroke

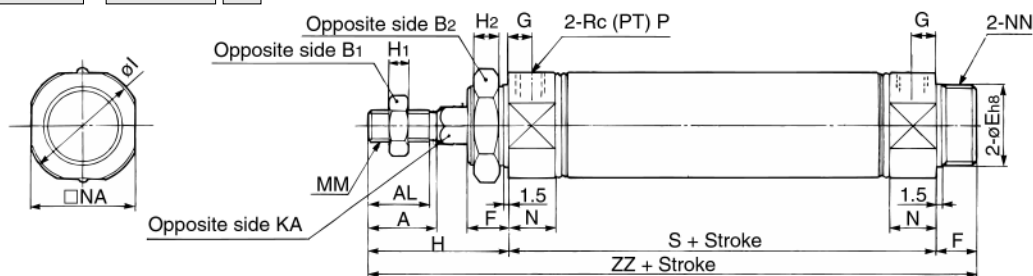

## Boss-cut




## With rod boot

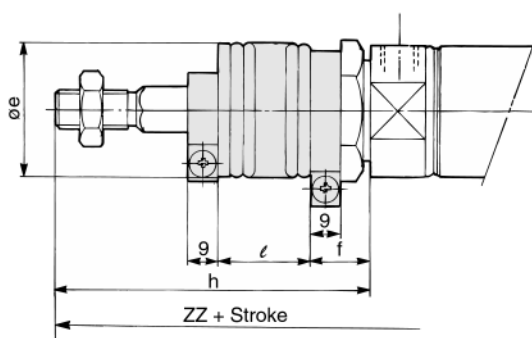

Cushion valve  
Width across flats 1.5

WB

## With air cushion

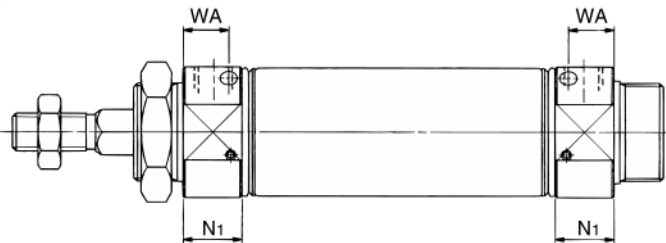

																				(mm)
Bore	A	AL	B1	B2	E	F	G	H	H1	H2	I	KA	MM	N	NA	NN	P	S	ZZ	
20	18	15.5	13	26	20 <sup>0</sup> <sub>-0.033</sub>	13	8	41	5	8	28	8.2	M8 X 1.25	15	24	M20 X 1.5	1/8	62	116	
25	22	19.5	17	32	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	8	33.5	10.2	M10 X 1.25	15	30	M26 X 1.5	1/8	62	120	
32	22	19.5	17	32	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	8	37.5	12.2	M10 X 1.25	15	34.5	M26 X 1.5	1/8	64	122	
40	24	21	22	41	32 <sup>0</sup> <sub>-0.039</sub>	16	11	50	8	10	46.5	14.2	M14 X 1.5	21.5	42.5	M32 X 2	1/4	88	154	

## With rod boot

																				(mm)
Bore	e	f	h							l					ZZ					
			1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	1 to 50	51 to 100	101 to 150	151 to 200	201 to 300	
20	36	17	68	81	93	106	131	156	—	12.5	25	37.5	50	75	143	156	168	181	206	
25	36	17	72	85	97	110	135	160	185	12.5	25	37.5	50	75	147	160	172	185	210	
32	36	17	72	85	97	110	135	160	185	12.5	25	37.5	50	75	149	162	174	187	212	
40	46	19	77	90	102	115	140	165	190	12.5	25	37.5	50	75	181	194	206	219	244	

## Boss-cut

Bore	ZZ					
	Without gaiter	With gaiter				
		1to50	51to100	101to150	151to200	201to300
20	103	130	143	155	168	193
25	107	134	147	159	172	197
32	109	136	149	161	174	199
40	138	165	178	190	203	228

## With air cushion

Bore	N1	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15



## Dimensions for Other Mounting Brackets


The dimensions are the same as standard style (double acting/single rod), except for the configuration of the piston rod.  
Refer to p.1.4-10 to 1.4-18. Specifications for the auto switch equipped style are the same as CDM2 series standard style.

# Non-rotating Rod: Double Acting Double Rod

## Series *CM2KW*

ø20, ø25, ø32, ø40

### How to Order

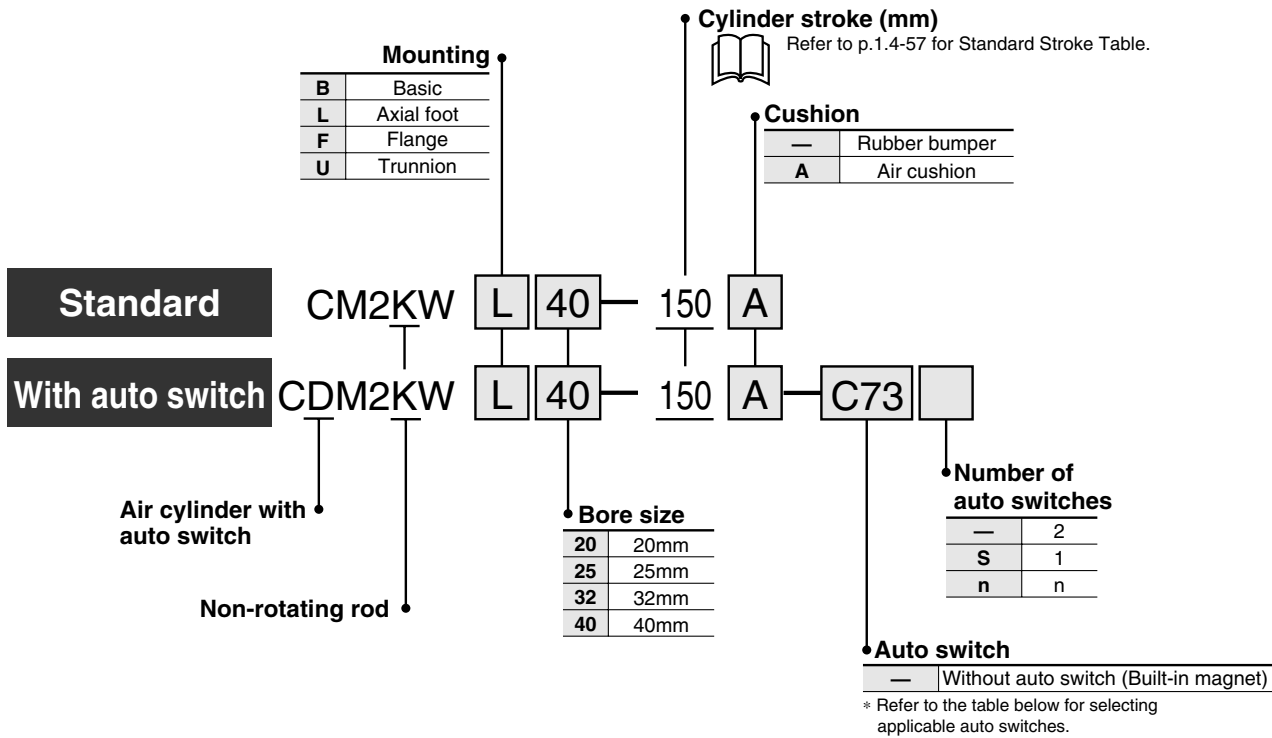

### Applicable Auto Switches/Refer to p.5.3-2 for further information on auto switches.

Style	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Auto switch model	Lead wire* (m)				Applicable load
					DC	AC		0.5 (—)	3 (L)	5 (Z)	None (N)	
Reed switch	—	Grommet	Yes	3 wire (NPN)	—	5V	C76	●	●	—	—	IC
							C73	●	●	●	—	Relay
							C80	●	●	—	—	PLC
							B53	●	●	●	—	IC
							B54	●	●	●	—	PLC
							B64	●	●	—	—	Relay
							C73C	●	●	●	●	PLC
							C80C	●	●	●	●	IC
							A33A	—	—	—	●	PLC
							A34A	—	—	—	●	Relay
Solid state switch	—	Grommet	Yes	2 wire	24V	—	A44A	—	—	—	●	PLC
							B59W	●	●	—	—	Relay
							H7A1	●	●	○	—	IC
							H7A2	●	●	○	—	IC
							H7B	●	●	●	—	—
							H7C	●	●	●	●	—
							G39A	—	—	—	●	IC
							K39A	—	—	—	●	—
							H7NW	●	●	○	—	Relay
							H7PW	●	●	○	—	PLC
							H7BW	●	●	○	—	—
							H7BA	—	●	○	—	—
							G5NT	—	●	○	—	IC
							H7NF	●	●	○	—	—
							H7LF	●	●	○	—	—



\* Lead wire length

0.5m : —  
3m : L  
5m : Z  
None: N

e.g.) C80CZ, C80CN

\* Solid state switches marked with "○" are manufactured upon receipt of order.

\* Do not indicate symbol "N" for no lead wire on "D-A3□A", "A44A", "G39A" and "K39A" models.

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1



# Series CM2KW

A cylinder in which the rod does not rotate because of its hexagonal shape.

**Non-rotating accuracy**  
 $\phi 20, \phi 25 \text{---} \pm 0.7^\circ$   
 $\phi 32, \phi 40 \text{---} \pm 0.5^\circ$

Can operate without lubrication.

The same installation dimensions as the standard cylinder.


Auto switches can also be mounted.

It can be installed with auto switches to detect the stroke position of the cylinder.



## JIS symbol

Double acting/Double rod



## Rod End Accessories

Refer to p.1.4-19 and 1.4-20 for mounting brackets.

## Specifications

Bore size (mm)	ø20	ø25	ø32	ø40
Rod non-rotating accuracy	±0.7°		±0.5°	
Style	Air cylinder			
Cushion	Rubber bumper			
Action	Double acting/Double rod			
Fluid	Air			
Proof pressure	1.5MPa			
Max. operating pressure	1.0MPa			
Min. operating pressure	0.08MPa			
Ambient and fluid temperature	Without auto switch: -10 to +70°C (No freezing) With auto switch: -10 to +60°C (No freezing)			
Lubrication	Non-lube			
Thread tolerance	JIS class 2			
Stroke tolerance	+1.4 0			
Piston speed (mm/s)	50 to 500			
Allowable kinetic energy	0.27J	0.4J	0.65J	1.2J

## Standard Stroke

Bore size (mm)	Standard stroke (mm) <sup>(1)</sup>
20	25, 50, 75, 100, 125, 150 200, 250, 300
25	
32	
40	

Note 1) Other intermediate strokes can be manufactured upon receipt of order.  
Contact SMC for longer strokes.

## Minimum Strokes for Auto Switch Mounting

(mm)

Auto switch model	Number of switches				1
	2		n		
	On different surfaces	On the same surface	On different surfaces	On the same surface	
D-C7 D-C8	15	50	$15+45(\frac{n-2}{2})$ (n=2, 4, 6...)	$50+45(n-2)$	10
D-H7□ D-H7□W D-H7BAL D-H7NF	15	60		$60+45(n-2)$	10
D-C73C D-C80C D-H7C	15	65	$15+50(\frac{n-2}{2})$ (n=2, 4, 6...)	$65+50(n-2)$	10
D-H7LF	20	65	$20+50(\frac{n-2}{2})$ (n=2, 4, 6...)		10
D-B5 D-B6	15	75	$15+50(\frac{n-2}{2})$ (n=2, 4, 6...)	$75+55(n-2)$	10
D-B59W	20	75	$20+50(\frac{n-2}{2})$ (n=2, 4, 6...)		15
D-A3□A D-G39A D-K39A D-A44A	35	100	$35+30(n-2)$	$100+100(n-2)$	10

## Mounting and Accessories

Mounting	Accessories		Option	
	Mounting nut	Rod end nut	Single knuckle joint	Double knuckle joint <sup>(1)</sup>
Basic	● (1 pc.)	● (2 pcs.)	●	●
Axial foot	● (2 pcs.)	● (2 pcs.)	●	●
Flange	● (1 pc.)	● (2 pcs.)	●	●
Trunnion	● (1 pc.) <sup>(1)</sup>	● (2 pcs.)	●	●
Note				With pins

Note 1) Trunnion nuts are attached.

Note 2) Pins and snap rings (cotter pins for  $\phi 40$ ) are attached for double knuckle joint.

# Non-rotating Rod: Double Acting Double Rod *Series CM2KW*

## Weight

Bore size (mm)		20	25	32	40
Basic weight	Basic style	0.16	0.25	0.32	0.66
	Axial foot style	0.31	0.41	0.48	0.93
	Flange style	0.22	0.34	0.41	0.78
	Trunnion style	0.20	0.32	0.38	0.76
Additional weight by each 50 stroke		0.06	0.1	0.14	0.20
Accessory	Single knuckle joint	0.06	0.06	0.06	0.23
	Double knuckle joint (with pins)	0.07	0.07	0.07	0.20

Calculation example: CM2KWL32-100

- Basic weight: 0.48 (Foot, ø32)
- Additional weight: 0.14/50 stroke
- Cylinder stroke: 100 stroke
- 0.48+0.14 X 100/50=0.76kg

## Mounting Bracket Part No.

Bore size mm	20	25	32	40
Axial foot *	CM-L020B	CM-L032B	CM-L040B	
Flange	CM-F020B	CM-F032B	CM-F040B	
Trunnion (with nuts)	CM-T020B	CM-T032B	CM-T040B	

\* Two foot brackets and a mounting nut are attached.

## Auto Switch Mounting Bracket Part No.

Auto switch model	Bore size (mm)			
	20	25	32	40
D-C7/C8 D-H7□	BM2-020	BM2-025	BM2-032	BM2-040
D-B5/B6 D-G5NTL	BA2-020	BA2-025	BA2-032	BA2-040
D-A3□/A/A44A D-G3/K3	BM3-020	BM3-025	BM3-032	BM3-040



(Note) A set of following stainless steel mounting screws is attached.  
(A switch mounting band is not attached.)

Please order the band separately.)

BBA3: D-B5/B6/G5

BBA4: D-C7/C8/H7

• "D-H7BAL" switch is set on the cylinder with the screws above when shipped.

When a switch only is shipped, "BBA4" screws are attached



## Precautions

Be sure to read before handling.  
Refer to p.0-39 to 0-43 for Safety Instructions and common precautions and refer to p.1.4-5 for those on CM2 series.

### Handling



### Cautions


① Avoid using the air cylinder in such a way that rotational torque would be applied to the piston rod.

• If rotational torque is applied, the non-rotating guide will become deformed, thus affecting the non-rotating accuracy.

Refer to the table below for the approximate values of the allowable range of rotational torque.

Allowable rotational torque (Nm)	ø20	ø25	ø32	ø40
	0.2	0.25	0.25	0.44

• To screw a bracket or a nut onto the threaded portion at the tip of the piston rod, make sure to retract the piston rod entirely, and place a wrench over the flat portion of the rod that protrudes. To tighten, take precautions to prevent the tightening torque from being applied to the non-rotating guide.

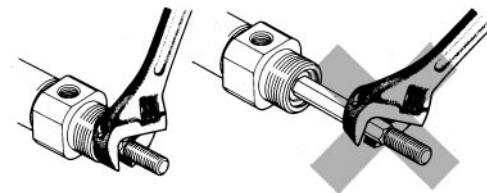

② To replace a rod seal, contact SMC.

A rod seal could lead to an air leak, depending on the position in which it is fitted. Therefore, make sure to contact SMC if a rod seal must be replaced.

## With Air Cushion

CM2KW Mounting Bore size Stroke A Gaiter

With air cushion

A cushion mechanism is provided on the cover at both ends to absorb the impact that is created during high speed operations. Thus, it does not transmit vibrations to the surroundings and prolongs the life of the cylinder.

Refer to p.1.4-7 for specifications and allowable kinetic energy.

## Copper Free

20-CM2KW Mounting Bore size Stroke

Copper free

This cylinder eliminates any influences of copper ions or fluororesins on colour CRTs. Copper materials have been nickel plated or replaced with non-copper materials to prevent the generation of copper ions.

Refer to p.1.4-8 for specifications.

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92


CA1

CS1


# Series CM2KW

## Construction

### Rubber bumper

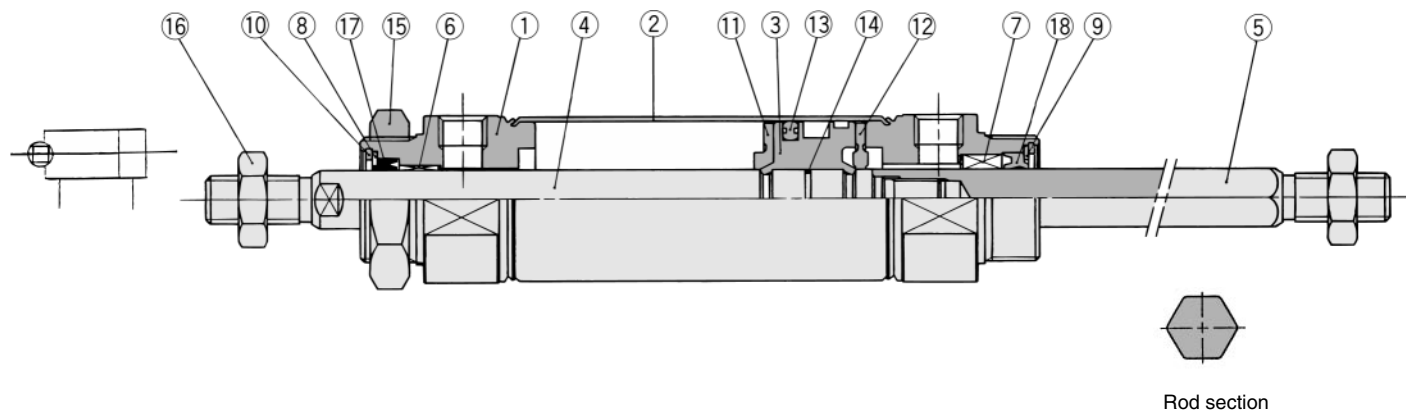

### With air cushion

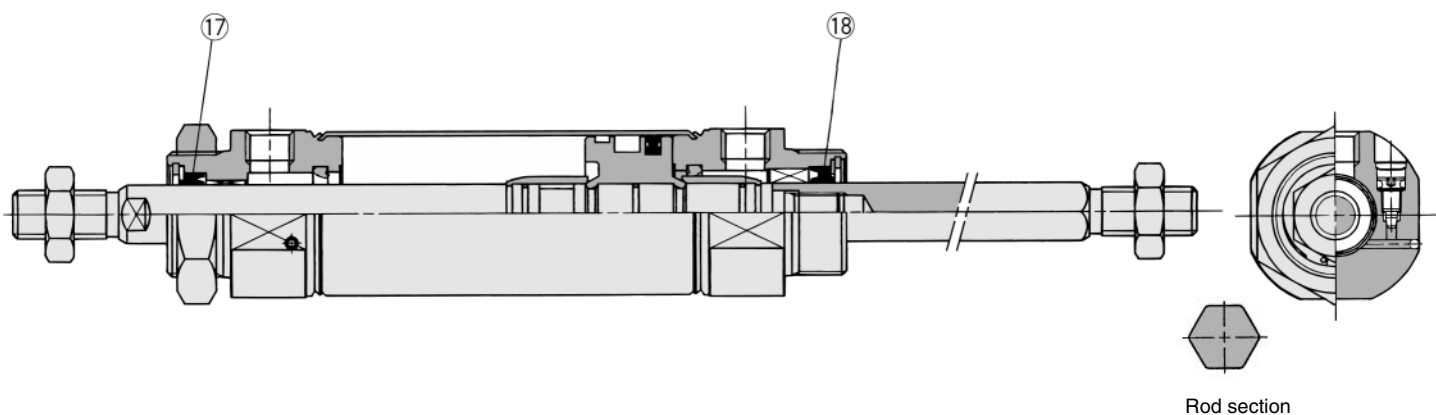

### Component Parts

No.	Description	Material	Note
①	Rod cover	Aluminum alloy	White anodized
②	Cylinder tube	Stainless steel	
③	Piston	Aluminum alloy	Chromated
④	Piston rod A	Carbon steel	Hard chrome plated
⑤	Piston rod B	Stainless steel	
⑥	Bushing	Oil impregnated sintered alloy	
⑦	Non-rotating guide	Oil impregnated sintered alloy	
⑧	Seal retainer A	Rolled steel	Nickel plated
⑨	Seal retainer B	Rolled steel	Nickel plated
⑩	Snap ring	Carbon steel	Nickel plated
⑪	Bumper A	Urethane	
⑫	Bumper B	Urethane	
⑬	Piston seal	NBR	
⑭	Piston gasket	NBR	
⑮	Mounting nut	Carbon steel	Nickel plated
⑯	Rod end nut	Carbon steel	Nickel plated

### Replacement Parts


#### ●With rubber bumper/With air cushion/Built-in One-touch fitting

No.	Description	Material	Bore size(mm)/Part No.			
			20	25	32	40
⑰	Rod seal A	NBR	PDU-8Z	PDU-10Z	PDU-12LZ	PDU-14LZ
⑱	Rod seal B	NBR	PDR-8W	PDR-10W	PDR-12W	PDR-14W

# Non-rotating Rod: Double Acting Double Rod *Series CM2KW*

## Basic (B)

CM2KWB Bore size Stroke

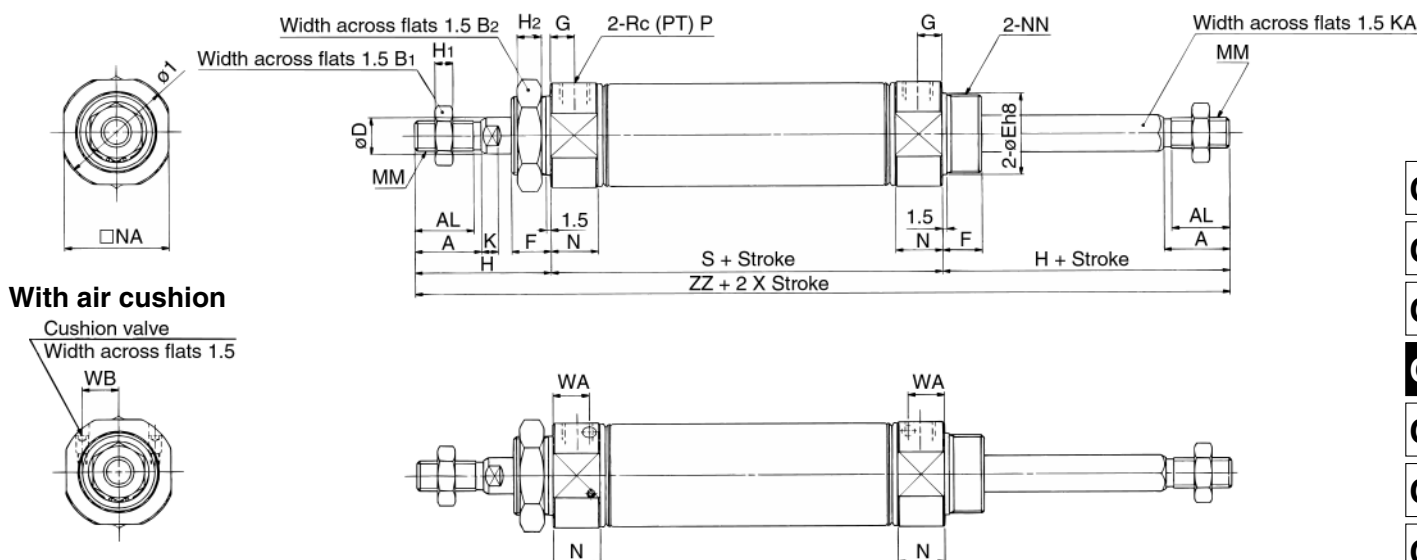

\* 301mm or longer stroke range is regarded as long stroke.

Bore	Stroke range	A	AL	B1	B2	D	E	F	G	H	H1	H2	II	K	KA	MM	N	NA	NN	P	S	ZZ
20	1 to 300	18	15.5	13	26	8	20 <sup>0</sup> <sub>-0.033</sub>	13	8	41	5	8	28	5	8.2	M8 X 1.25	15	24	M20 X 1.5	1/8	62	144
25	1 to 300	22	19.5	17	32	10	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	8	33.5	5.5	10.2	M10 X 1.25	15	30	M26 X 1.5	1/8	62	152
32	1 to 300	22	19.5	17	32	12	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	8	37.5	5.5	12.2	M10 X 1.25	15	34.5	M26 X 1.5	1/8	64	154
40	1 to 300	24	21	22	41	14	32 <sup>0</sup> <sub>-0.033</sub>	16	11	50	8	10	46.5	7	14.2	M14 X 1.5	21.5	42.5	M32 X 2	1/4	88	188

## With air cushion

Bore	N	WA	WB
20	17.5	13	8.5
25	17.5	13	10.5
32	17.5	13	11.5
40	21.5	16	15

## Dimensions for Other Mounting Brackets

The dimensions are the same as the standard style (double acting/double rod), except for K/A dimensions. Refer to p.1.4-19 and 1.4-20.

## Auto Switch Mounting Position

The auto switch mounting position (at stroke end) is the same as the standard style (double acting/double rod). Refer to p.1.4-32.

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1


CS1

# Non-rotating Rod: Single Acting Spring Return/Extend

## Series CM2K

ø20, ø25, ø32, ø40

### How to Order

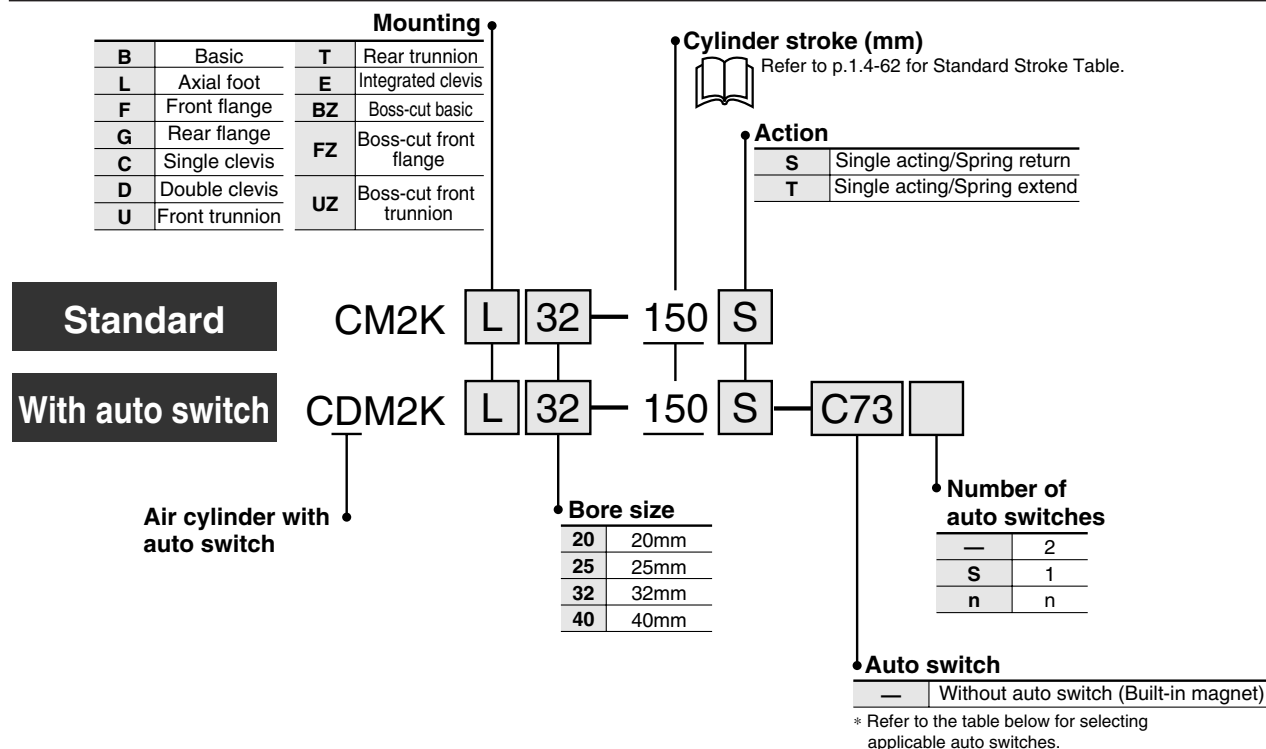

### Applicable Auto Switches/Refer to p.5.3-2 for further information on auto switches.

Style	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Auto switch model	Lead wire* (m)				Applicable load	
					DC	AC		0.5 (—)	3 (L)	5 (Z)	None (N)		
Reed switch	—	Grommet	Yes	3 wire (NPN)	—	5V —	<b>C76</b>	●	●	—	—	IC	—
							<b>C73</b>	●	●	●	—	—	Relay PLC
							<b>C80</b>	●	●	—	—	IC	—
							<b>B53</b>	●	●	●	—	—	PLC
							<b>B54</b>	●	●	●	—	—	—
							<b>B64</b>	●	●	—	—	—	Relay PLC
							<b>C73C</b>	●	●	●	●	—	—
							<b>C80C</b>	●	●	●	●	IC	—
							<b>A33A</b>	—	—	—	●	—	PLC
							<b>A34A</b>	—	—	—	●	—	—
Solid state switch	—	Grommet	Yes	3 wire (NPN)	—	5V, 12V	<b>A44A</b>	—	—	—	●	—	Relay PLC
							<b>B59W</b>	●	●	—	—	—	—
							<b>H7A1</b>	●	●	○	—	—	IC
							<b>H7A2</b>	●	●	○	—	—	—
							<b>H7B</b>	●	●	○	—	—	—
							<b>H7C</b>	●	●	●	●	—	—
							<b>G39A</b>	—	—	—	●	—	IC
							<b>K39A</b>	—	—	—	●	—	—
							<b>H7NW</b>	●	●	○	—	—	IC
							<b>H7PW</b>	●	●	○	—	—	—
							<b>H7BW</b>	●	●	○	—	—	—
							<b>H7BA</b>	—	●	○	—	—	—
							<b>G5NT</b>	—	●	○	—	—	IC
							<b>H7NF</b>	●	●	○	—	—	—
							<b>H7LF</b>	●	●	○	—	—	—



\* Lead wire length

0.5m : —  
3m : L  
5m : Z  
None : N  
e.g.) C80CZ, C80CN

\* Solid state switches marked with "○" are manufactured upon receipt of order.

\* Do not indicate symbol "N" for no lead wire on "D-A3□A", "A44A", "G39A" and "K39A" models.

# Non-rotating Rod: Single Acting Spring Return/Extend *Series CM2K*

**A cylinder in which the rod does not rotate because of its hexagonal shape.**

**Non-rotating accuracy**  
 $\phi 20, \phi 25$ — $\pm 0.7^\circ$   
 $\phi 32, \phi 40$ — $\pm 0.5^\circ$

**Can operate without lubrication.**

**The same installation dimensions as the standard cylinder.**

**Auto switches can also be mounted.**


It can be installed with auto switches to simplify the detection of the stroke position of the cylinder.



## JIS symbol

Single acting/  
Spring return

Spring extend



**Made to Order**

Refer to p.5.4-1 for made to order specifications of series CM2K.



## Precautions

**Be sure to read before handling.**  
**Refer to p.0-39 to 0-43 for Safety Instructions and common precautions and refer to p.1.4-52 for those on CM2K series.**

## Specifications

Bore size (mm)		ø20	ø25	ø32	ø40
Action		Single acting/Spring return, Spring extend			
Fluid		Air			
Cushion		Rubber bumper			
Proof pressure		1.5MPa			
Max. operating pressure		1.0MPa			
Min. operating pressure	Spring return	0.18MPa			
	Spring extend	0.23MPa			
Ambient and fluid temperature		Without auto switch: −10 to +70°C (No freezing) With auto switch: −10 to +60°C (No freezing)			
Lubrication		Non-lube			
Thread tolerance		JIS class 2			
Stroke tolerance		+1.4 0			
Piston speed (mm/s)		50 to 500			
Rod non-rotating accuracy		±0.7°		±0.5°	
Allowable kinetic energy		0.27J	0.4J	0.65J	1.2J

## Standard Stroke

Bore size (mm)	Standard stroke (mm) <sup>(1)</sup>
20	25, 50, 75, 100, 125, 150
25	25, 50, 75, 100, 125, 150
32	25, 50, 75, 100, 125, 150, 200
40	25, 50, 75, 100, 125, 150, 200, 250

Note 1) Other intermediate strokes can be manufactured upon receipt of order.  
Contact SMC for longer strokes.

## Minimum Strokes for Auto Switch Mounting

Refer to p.1.4-4 for minimum stroke table.

## Mounting Bracket Part No.

Bore size (mm)	20	25	32	40
Axial foot*	CM-L020B	CM-L032B	CM-L040B	CM-L040B
Flange	CM-F020B	CM-F032B	CM-F040B	CM-F040B
Single clevis	CM-C020B	CM-C032B	CM-C040B	CM-C040B
Double clevis** (with pins)	CM-D020B	CM-D032B	CM-D040B	CM-D040B
Trunnion (with nuts)	CM-T020B	CM-T032B	CM-T040B	CM-T040B

\* Two foot brackets and a mounting nut are attached.

\*\* Clevis pins and snap rings (cotter pins for bore size 40) are attached.

## Auto Switch Mounting Bracket Part No.

Auto switch model	Bore size (mm)			
	20	25	32	40
D-C7/C8 D-H7□	BM2-020	BM2-025	BM2-032	BM2-040
D-B5/B6 D-G5NTL	BA2-020	BA2-025	BA2-032	BA2-040
D-A3□/A44A D-G39A/K39A	BM3-020	BM3-025	BM3-032	BM3-040



Note) A set of following stainless steel mounting screws is attached.  
(A switch mounting band is not attached. Please order the band separately.)

BBA4: D-C7/C8/H7

· "D-H7BAL" switch is set on the cylinder with the screws above when shipped.

When a switch only is shipped, "BBA4" screws are attached



# Series CM2K

## Mounting and Accessories

Accessories Mounting	Standard			Option		
	Mounting nut	Rod end nut	Clevis pin	Single knuckle joint	Double knuckle joint <sup>(3)</sup>	Pivot bracket
Basic	● (1 pc.)	●	—	●	●	—
Axial foot	● (2)	●	—	●	●	—
Front flange	● (1)	●	—	●	●	—
Rear flange	● (1)	●	—	●	●	—
Integrated clevis	— (1)	●	—	●	●	●
Single clevis	— (1)	●	—	●	●	—
Double clevis <sup>(3)</sup>	— (1)	●	●	●	●	—
Front trunnion	● (1) <sup>(2)</sup>	●	—	●	●	—
Rear trunnion	● (1) <sup>(2)</sup>	●	—	●	●	—
Boss-cut basic	● (1)	●	—	●	●	—
Boss-cut flange	● (1)	●	—	●	●	—
Boss-cut trunnion	● (1)	●	—	●	●	—
Note					With pins	With pins

Note 1) Mounting nuts are not attached for the integrated clevis type, the single clevis type, and the double clevis type.

Note 2) Trunnion nuts are attached for the front trunnion styles and the rear trunnion styles.

Note 3) Pins and snap rings (cotter pins for bore size 40) are attached for double clevis and the double knuckle joint.

## Weight

### Spring Return/( ): Spring Extend

Bore size (mm)		(kg)			
		20	25	32	40
Basic weight	25stroke	0.20(0.19)	0.31(0.30)	0.43(0.41)	0.78(0.75)
	50stroke	0.23(0.21)	0.34(0.33)	0.48(0.45)	0.86(0.83)
	75stroke	0.29(0.25)	0.43(0.41)	0.61(0.56)	1.08(0.99)
	100stroke	0.31(0.27)	0.47(0.44)	0.66(0.60)	1.14(1.06)
	125stroke	0.37(0.32)	0.56(0.52)	0.81(0.72)	1.34(1.23)
	150stroke	0.39(0.34)	0.59(0.55)	0.85(0.76)	1.39(1.31)
	200stroke	—(—)	—(—)	1.04(0.92)	1.71(1.54)
	250stroke	—(—)	—(—)	—(—)	2.00(1.78)
Mounting bracket weight	Axial foot style	0.15(0.15)	0.16(0.16)	0.16(0.16)	0.27(0.27)
	Flange style	0.06(0.06)	0.09(0.09)	0.09(0.09)	0.12(0.12)
	Single clevis style	0.04(0.04)	0.04(0.04)	0.04(0.04)	0.09(0.09)
	Double clevis style	0.05(0.05)	0.06(0.06)	0.06(0.06)	0.13(0.13)
	Trunnion style	0.04(0.04)	0.07(0.07)	0.07(0.07)	0.10(0.10)
	Integrated clevis style	−0.02(−0.02)	−0.02(−0.02)	−0.01(−0.01)	−0.04(−0.04)
	Boss-cut basic style	−0.01(−0.01)	−0.02(−0.02)	−0.02(−0.02)	−0.03(−0.03)
	Boss-cut flange style	0.05(0.05)	0.07(0.07)	0.07(0.07)	0.09(0.09)
	Boss-cut trunnion style	0.03(0.03)	0.05(0.05)	0.05(0.05)	0.07(0.07)
	Clevis bracket (with pins)	0.07(0.07)	0.07(0.07)	0.14(0.14)	0.14(0.14)
Accessory	Single knuckle joint	0.06(0.06)	0.06(0.06)	0.06(0.06)	0.23(0.23)
	Double knuckle joint (with pins)	0.07(0.07)	0.07(0.07)	0.07(0.07)	0.20(0.20)

Calculation example:

CM2KL32-100S (ø32, Foot, 100 stroke)

0.66 (Basic weight) + 0.16 (Mounting bracket weight)=0.82kg

## Boss-cut Style

Boss for the head cover bracket is eliminated and the total length of cylinder is shortened.



## Comparison of total cylinder length with standard style (mm)

ø20	ø25	ø32	ø40
▲13	▲13	▲13	▲16

## Mounting

- Boss-cut basic (BZ)
- Boss-cut flange (FZ)
- Boss-cut trunnion (UZ)

## Auto Switch Mounting Position

The auto switch mounting position (at stroke end) is the same as standard style (single acting/spring return, extend). Refer to p.1.4-48 and 1.4-49.

# Non-rotating Rod: Single Acting Spring Return/Extend *Series CM2K*

## Copper Free

**20-CM2K** **Mounting** **Bore size** **Stroke** **Action**

• Copper free

This cylinder eliminates any influences of copper ions or fluororesins on colour CRTs. Copper materials have been nickel plated or replaced with non-copper materials to prevent the generation of copper ions.


## Specifications

Action	Single acting/Spring return	Single acting/Spring extend
Bore size	ø20, ø25, ø32, ø40	
Max. operating pressure	1.0MPa	
Min. operating pressure	0.18MPa	0.23MPa
Cushion	Rubber bumper	
Piston speed	50 to 500mm/s	
Mounting	Basic, Axial foot, Front flange, Rear flange, Single clevis, Double clevis, Front trunnion, Rear trunnion, Integrated clevis, Boss-cut	

\* Auto switches can be mounted.


## Construction

### Spring return

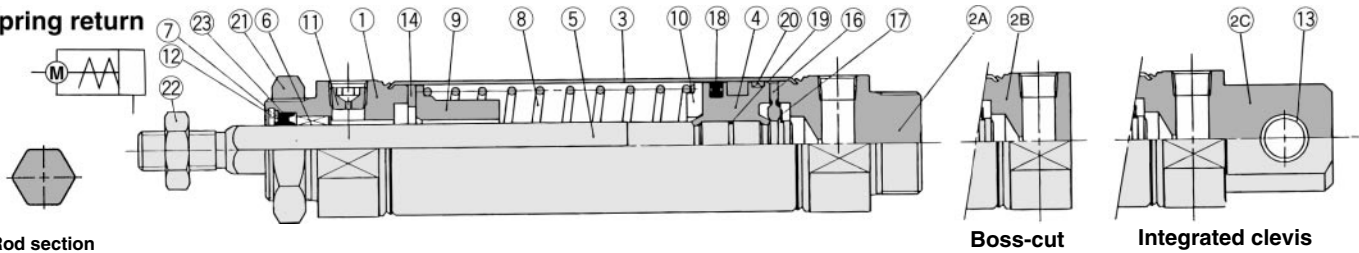

Rod section

### Spring extend

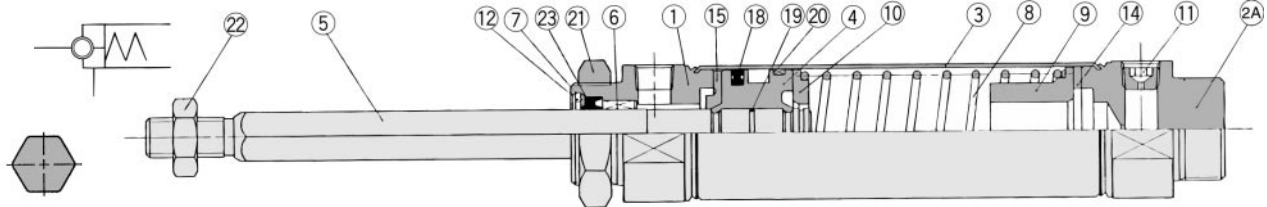

Rod section

## Component Parts

No.	Description	Material	Note
①	Rod cover	Aluminum alloy	White anodized
②A	Head cover A	Aluminum alloy	White anodized (Standard style)
②B	Head cover B	Aluminum alloy	White anodized (Boss-cut style)
②C	Head cover C	Aluminum alloy	White anodized (Integrated clevis style)
③	Cylinder tube	Stainless steel	
④	Piston	Aluminum alloy	Chromated
⑤	Piston rod	Stainless steel	
⑥	Non-rotating guide	Oil impregnated sintered alloy	
⑦	Seal retainer	Rolled steel	Nickel plated
⑧	Return spring	Steel wire	Zinc chromated
⑨	Spring guide	Aluminum alloy	Chromated
⑩	Spring seat	Aluminum alloy	Chromated
⑪	Plug with fixed orifice	Alloy steel	Black zinc chromated

No.	Description	Material	Note
⑫	Snap ring	Carbon steel	Nickel plated
⑬	Bushing for clevis	Oil impregnated sintered alloy	
⑭	Bumper	Urethane	
⑮	Bumper A	Urethane	
⑯	Bumper B	Urethane	
⑰	Snap ring	Stainless steel	
⑱	Piston seal	NBR	
⑲	Piston gasket	NBR	
⑳	Wearing	Resin	Nickel plated
㉑	Mounting nut	Carbon steel	Nickel plated
㉒	Rod end nut	Carbon steel	

## Replacement Parts


No.	Description	Material	Bore size(mm)/Part No.			
			20	25	32	40
㉓	Rod seal	NBR	PDR-8W	PDR-10W	PDR-12W	PDR-14W

# Series CM2K


## Basic (B)

CM2KB Bore size Stroke  $\frac{S}{T}$


### Spring return

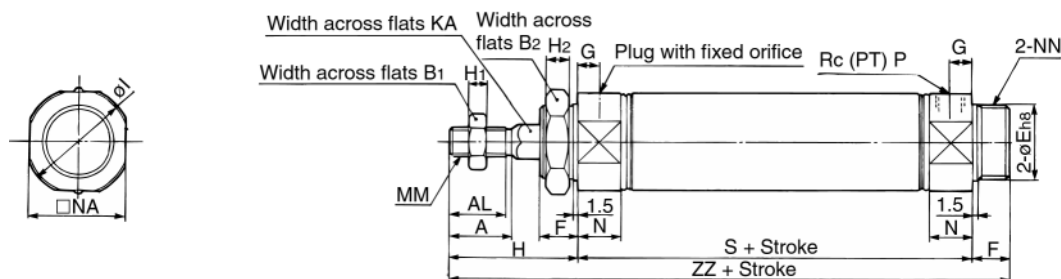

### Spring extend

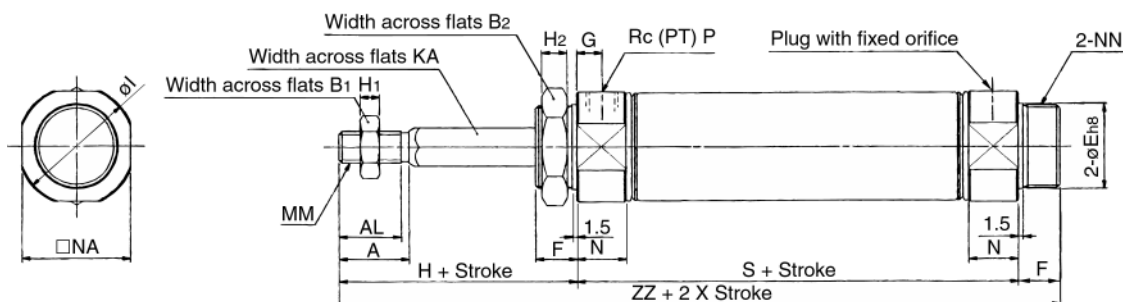

### Boss-cut

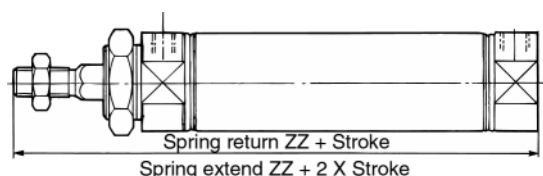

Bore	A	AL	B1	B2	E	F	G	H	H1	H2	I	KA	MM	N	NA	NN	P
20	18	15.5	13	26	20 <sup>0</sup> <sub>-0.033</sub>	13	8	41	5	8	28	8.2	M8 X 1.25	15	24	M20 X 1.5	<sup>1</sup> / <sub>8</sub>
25	22	19.5	17	32	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	8	33.5	10.2	M10 X 1.25	15	30	M26 X 1.5	<sup>1</sup> / <sub>8</sub>
32	22	19.5	17	32	26 <sup>0</sup> <sub>-0.033</sub>	13	8	45	6	8	37.5	12.2	M10 X 1.25	15	34.5	M26 X 1.5	<sup>1</sup> / <sub>8</sub>
40	24	21	22	41	32 <sup>0</sup> <sub>-0.039</sub>	16	11	50	8	10	46.5	14.2	M14 X 1.5	21.5	42.5	M32 X 2	<sup>1</sup> / <sub>4</sub>

### Dimensions by stroke

Dimension by stroke										(mm)	
Bore	Stroke Symbol	1 to 50		51 to 100		101 to 150		151 to 200		201 to 250	
		S	ZZ	S	ZZ	S	ZZ	S	ZZ	S	ZZ
20		87	141	112	166	137	191	—	—	—	—
25		87	145	112	170	137	195	—	—	—	—
32		89	147	114	172	139	197	164	222	—	—
40		113	179	138	204	163	229	188	254	213	279

### Boss-cut

Stroke Symbol	1 to 50	51 to 100	101 to 150	151 to 200	201 to 250
Bore	ZZ	ZZ	ZZ	ZZ	ZZ
20	128	153	178	—	—
25	132	157	182	—	—
32	134	159	184	209	—
40	163	188	213	238	263




The dimensions are the same as standard style (single acting/spring return, extend), except for the configuration of the piston rod. Refer to p.1.4-39 to 1.4-47. Specifications of the auto switch equipped style are the same as standard style (CDM2-□S/T).

# Direct Mount: Double Acting Single Rod

## Series *CM2R*

ø20, ø25, ø32, ø40

## How to Order

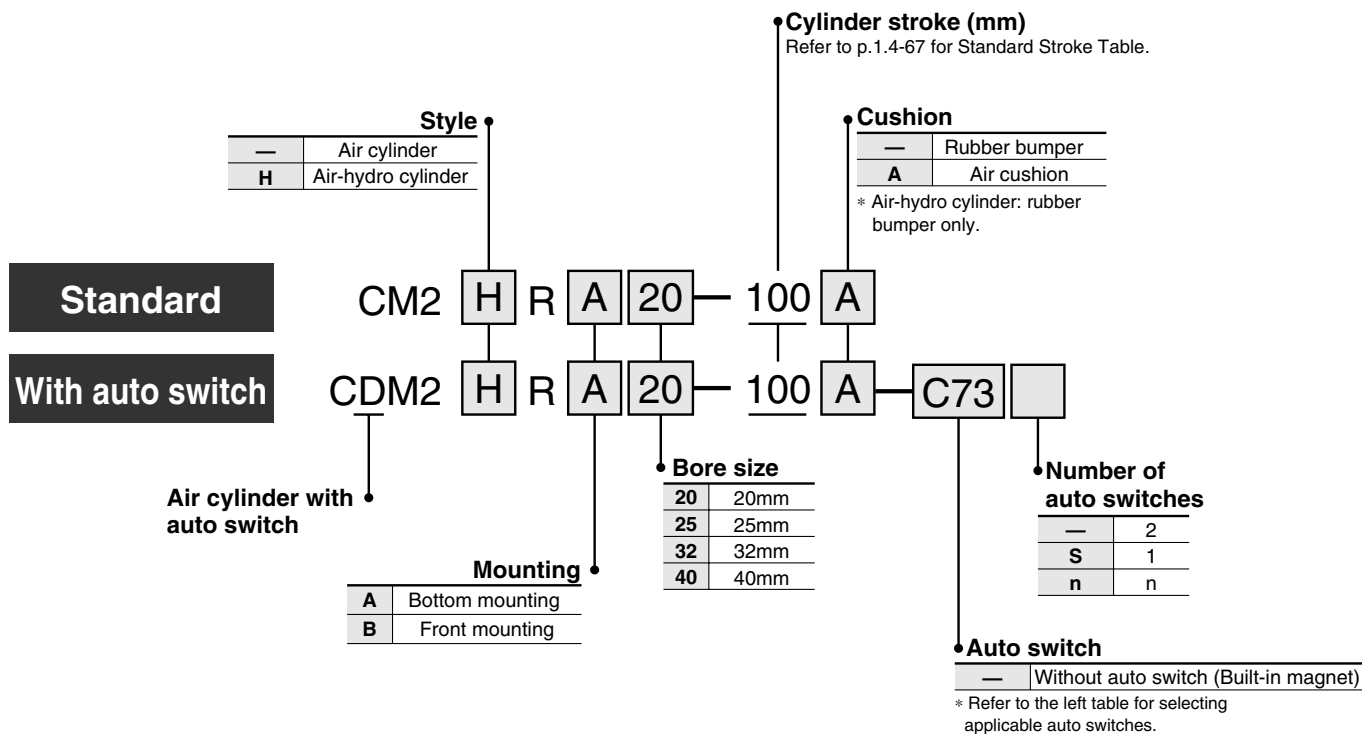

**Applicable Auto Switches/**Refer to p.5.3-2 for further information on auto switches.

Style	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage			Auto switch model	Lead wire* (m)				Applicable load			
					DC		AC		0.5 (—)	3 (L)	5 (Z)	None (N)				
Reed switch	—	Grommet	Yes	3 wire (NPN)	—	5V	—	C76	●	●	—	—	IC	—		
			No	2 wire	24V	12V	100V	C73	●	●	●	—	—	Relay PLC		
			Yes			5V, 12V	100V or less	C80	●	●	—	—	IC	PLC		
			No			12V	—	B53	●	●	●	—	—	—		
			No			12V	100V, 200V	B54	●	●	●	—	—	—		
		Connector	Yes			12V	200V or less	B64	●	●	—	—	—	Relay PLC		
			No			12V	—	C73C	●	●	●	●	—	—		
		Terminal conduit	Yes			5V, 12V	24V or less	C80C	●	●	●	●	IC	—		
			No			12V	—	A33A	—	—	—	●	—	PLC		
		DIN connector	Yes			12V	100V, 200V	A34A	—	—	—	●	—	Relay PLC		
						12V	—	A44A	—	—	—	●			—	
		Diagnostic indicator (2 colour)	Grommet					B59W	●	●	—	—				
Solid state switch	—	Grommet	Yes	3 wire(NPN)	24V	5V, 12V	—	H7A1	●	●	○	—	IC	Relay PLC		
				3 wire(PNP)				H7A2	●	●	○	—				
		Connector		2 wire		12V		H7B	●	●	○	—				
								H7C	●	●	●	●			—	
		Terminal conduit		3 wire(NPN)		5V, 12V		G39A	—	—	—	●	IC			
	2 wire			12V		K39A		—	—	—	●	—				
	Diagnostic indicator (2 colour)	Grommet		3 wire(NPN)		5V, 12V		H7NW	●	●	○	—	IC			
				3 wire(PNP)				H7PW	●	●	○	—				
				2 wire		12V		H7BW	●	●	○	—	—			
	Water resistant (2 colour)							H7BA	—	—	○	—	—			
	With timer			3 wire(NPN)		5V, 12V		G5NT	—	●	○	—	IC			
	Diagnostic output (2 colour)							H7NF	●	●	○	—				
	Latch with diagnostic output (2 colour)			4 wire (NPN)		—		H7LF	●	●	○	—	—			



\* Lead wire length

0.5m : —

$$0.5m : 3m = L$$

5m : Z

None: N

e.g.) C80

d with "○" are manufac

\* Solid state switches marked with "O" are manufactured upon receipt of order.

\* Do not indicate symbol "N" for no lead wire on "D-A3□A", "A44A", "G39A" and "K39A" models.

CJ1
CJP
CJ2
<b>CM2</b>
C85
C76
CG1
MB
MB1
CP95
C95
C92
CA1
CS1

# Series CM2R

**The CM2R Series direct mounting cylinder can be installed directly through the use of a square rod cover.**



## Space saving configuration.

Because it is a directly mounted style without using brackets, its overall length is shorter, and its installation pitch can be made smaller. Thus, the space that is required for installation has been dramatically reduced.

## Improved installation accuracy and strength


## Two styles of installation

Two styles of installations are available and can be selected according to the purpose: the front mounting style or the bottom mounting style.

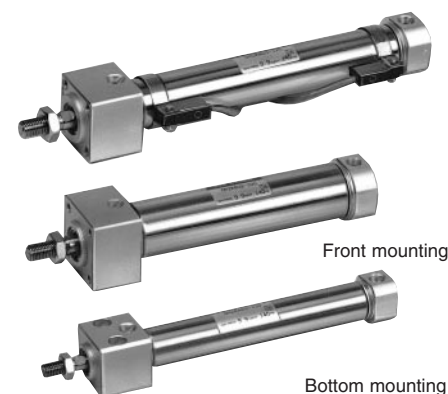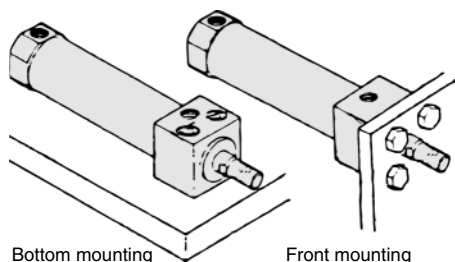

## JIS symbol

Double acting



**Made to Order**

Refer to p.5.4-1 for made to order specifications of series CM2R.

## Specifications

Bore size (mm)	20	25	32	40
Action	Double acting/Single rod			
Fluid	Air			
Proof pressure	1.5MPa			
Max. operating pressure	1.0MPa			
Min. operating pressure	0.05MPa			
Ambient and fluid temperature	Without auto switch: -10 to +70°C (No freezing) With auto switch: -10 to +60°C (No freezing)			
Lubrication	Non-lube			
Thread tolerance	JIS class 2			
Stroke tolerance	+1.4 0			
Piston speed (mm/s)	50 to 750			
Cushion	Rubber bumper			
Allowable kinetic energy	0.27J	0.4J	0.65J	1.2J

## Standard Stroke

Bore size (mm)	Standard stroke (mm) <sup>(1)</sup>
20	25, 50, 75, 100, 125, 150
25	25, 50, 75, 100, 125, 150, 200
32	25, 50, 75, 100, 125, 150, 200
40	25, 50, 75, 100, 125, 150, 200, 250, 300

Note 1) Other intermediate strokes can be manufactured upon receipt of order.  
Contact SMC for longer strokes.

## Minimum Strokes for Auto Switches Mounting

Refer to p.1.4-4 for minimum stroke table.

## Auto Switch Mounting Bracket Part No.

Auto switch model	Bore size (mm)			
	20	25	32	40
D-C7/C8 D-H7□	BM2-020	BM2-025	BM2-032	BM2-040
D-B5/B6 D-G5NTL	BA2-020	BA2-025	BA2-032	BA2-040
D-A3□A/A44A D-G39A/K39A	BM3-020	BM3-025	BM3-032	BM3-040



Note) A set of following stainless steel mounting screws is attached.  
(A switch mounting band is not attached. Please order the band separately.)

BBA4: D-C7/C8/H7

· "D-H7BAL" switch is set on the cylinder with the screws above when shipped.

When a switch only is shipped, "BBA4" screws are attached

# Direct Mount: Double Acting Single Rod *Series CM2R*

## Accessories

Accessories	Standard	Option	
	Rod end nut	Single knuckle joint	Double knuckle joint (with pins) *
Bottom mounting	●	●	●
Front mounting	●	●	●

\* Knuckle pins and snap rings (cotter pins for ø40) are attached.

## Weight

Bore size (mm)		20	25	32	40
Basic weight	Bottom mounting	0.14	0.23	0.32	0.62
	Front mounting	0.14	0.22	0.32	0.61
Additional weight by each 50 stroke		0.04	0.06	0.08	0.13

(kg)

Calculation example: CM2RA32-100  
(ø32, 100 stroke, Bottom mounting)

- Basic weight: 0.32kg
- Additional weight: 0.08kg
- Cylinder stroke: 100mm

$$0.32 + 0.08 \times 100 / 50 = 0.48\text{kg}$$

## Air-hydro

### CM2HR Mounting Bore size Stroke

• Air-hydro type

A low hydraulic pressure cylinder used at a pressures of 1.0MPa or below.

Through the concurrent use of a CC series air-hydro unit, it is possible to operate at a constant or low speed or to effect an intermediate stop, just like a hydraulic unit, while using pneumatic equipment such as a valve.



## Specifications

Style	Air-hydro
Fluid	Turbine oil
Action	Double acting/Single rod
Bore size	ø20, ø25, ø32, ø40
Proof pressure	1.5MPa
Max. operating pressure	1.0MPa
Min. operating pressure	0.18MPa
Piston speed	15 to 300mm/s
Cushion	Rubber bumper
Ambient and fluid temperature	+5 to +60°C
Thread tolerance	JIS class 2
Stroke tolerance	+1.4 0
Mounting	Bottom mounting, Front mounting

\* Auto switches can be mounted.  
Dimensions are the same as standard style.


- Construction: Refer to p.1.4-70.
- Dimensions: Refer to p.1.4-71 and 1.4-72.

## Clean Series

### 10-CM2R Mounting Bore size Stroke

• Clean series (with relief port)

The rod portion of the actuator has a double seal construction, and a relief port is provided to discharge the exhaust air directly outside of the clean room. Thus, it can be used in a Class 100 clean room.

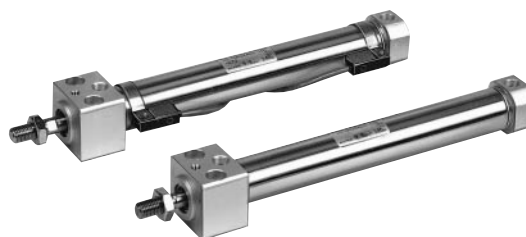


## Specifications


Action	Double acting/Single rod
Bore size	ø20, ø25, ø32, ø40
Max. operating pressure	1.0MPa
Min. operating pressure	0.05MPa
Cushion	Rubber bumper (standard equipment)
Relief port size	M5
Piston speed	30 to 400mm/s
Mounting	Bottom mounting, Front mounting

\* Auto switches can be mounted.


## Construction

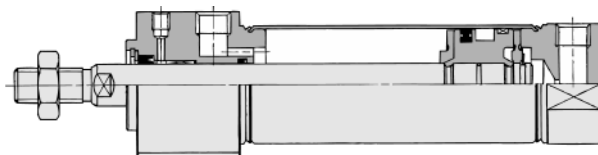

### Front mounting



### Bottom mounting




Bore size	GC
20	6
25	6
32	7
40	9



# Series CM2R

## With Air Cushion



A cushion mechanism is provided on the cover at both ends to absorb the impact that is created during high speed operations. Thus, it does not transmit vibrations to the surroundings and prolongs the life of the cylinder.



### Specifications


Action	Double acting/Single rod
Bore size	ø20, ø25, ø32, ø40
Max. operating pressure	1.0MPa
Min. operating pressure	0.05MPa
Piping	Screw-in
Piston speed	50 to 1000mm/s
Mounting	Bottom mounting, Front mounting

\* Auto switches can be mounted.


Bore size (mm)	Effective cushion length (mm)	Kinetic energy absorption
20	11.0	0.54J
25	11.0	0.78J
32	11.0	1.27J
40	11.8	2.35J

- Construction: Refer to p.1.4-70.
- Dimensions: Refer to p.1.4-71 and 1.4-72.
- Refer to p.1.4-67 for other specifications.

## Copper Free



This cylinder eliminates any influences of copper ions or fluororesins on colour CRTs. Copper materials have been nickel plated or replaced with non-copper materials to prevent the generation of copper ions.

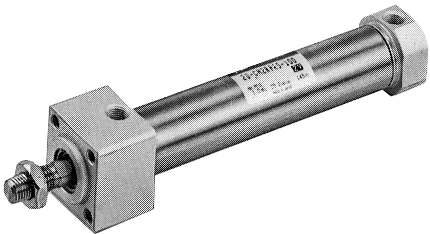

### Specifications


Action	Double acting/Single rod
Bore size	ø20, ø25, ø32, ø40
Max. operating pressure	1.0MPa
Min. operating pressure	0.05MPa
Cushion	Rubber bumper
Piston speed	50 to 750mm/s
Mounting	Bottom mounting, Front mounting

\* Auto switches can be mounted.


# Direct Mount: Double Acting Single Rod *Series CM2R*

## Construction


### Rubber bumper

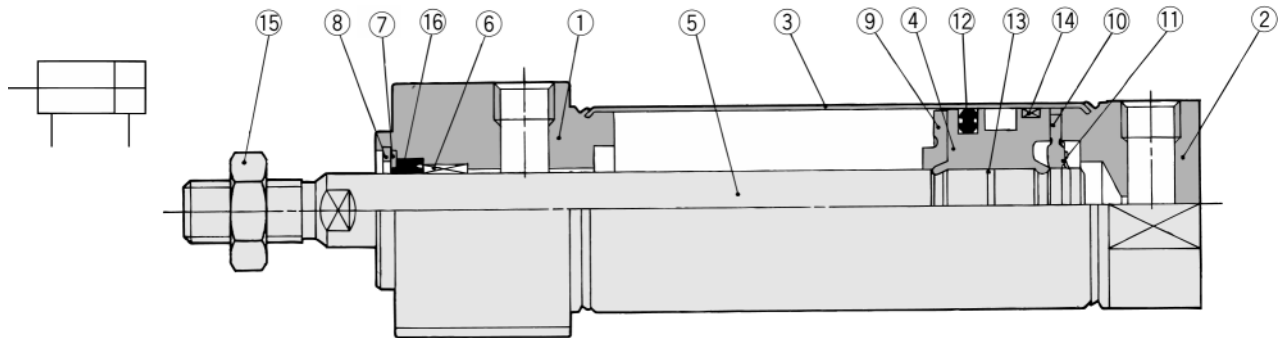

### Air-hydro

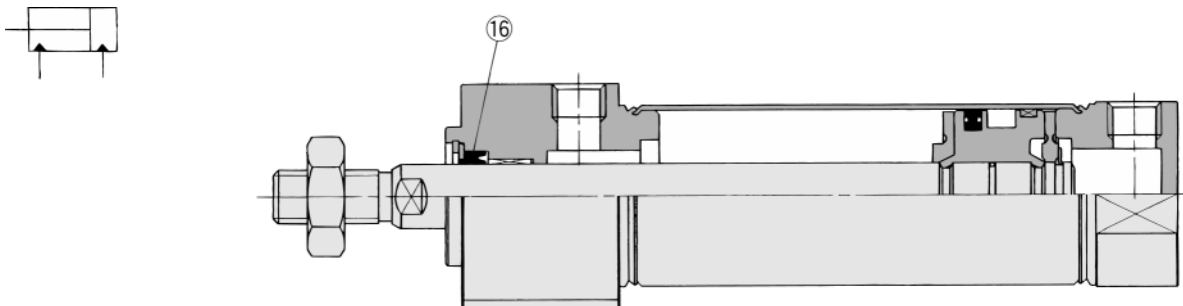

### With air cushion

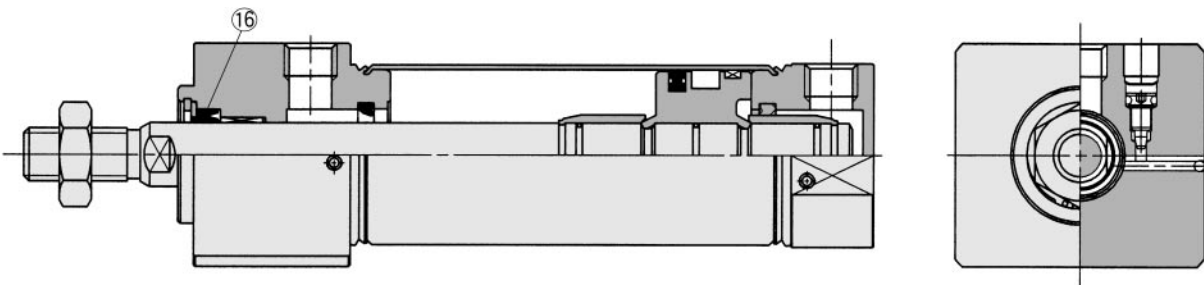

### Component Parts

No.	Description	Material	Note
①	Rod cover	Aluminum alloy	White anodized
②	Head cover	Aluminum alloy	White anodized
③	Cylinder tube	Stainless steel	
④	Piston	Aluminum alloy	Chromated
⑤	Piston rod	Carbon steel	Hard chrome plated
⑥	Bushing	Oil impregnated sintered alloy	
⑦	Seal retainer	Rolled steel	Nickel plated
⑧	Snap ring	Carbon steel	Nickel plated
⑨	Bumper A	Urethane	
⑩	Bumper B	Urethane	
⑪	Snap ring	Stainless steel	
⑫	Piston seal	NBR	
⑬	Piston gasket	NBR	
⑭	Wearing	Resin	
⑮	Rod end nut	Carbon steel	Nickel plated

### Replacement Parts: With rubber bumper/With air cushion

No.	Description	Material	Bore size(mm)/Part No.			
			20	25	32	40
⑮	Rod seal	NBR	PDU-8Z	PDU-10Z	PDU-12LZ	PDU-14LZ

### Air-hydro style

No.	Description	Material	Bore size(mm)/Part No.			
			20	25	32	40
⑮	Rod seal	NBR	HDU-8	HDU-10	HDU-12L	HDU-14

Refer to the auto switch setting position (at stroke end) for standard style (double acting/single rod) on p.1.4-21.

CJ1

CJP

CJ2

**CM2**

C85

C76

CG1

MB

MB1

CP95

C95

C92


CA1

CS1


# Series CM2R

## Bottom Mounting

CM2RA Bore size Stroke

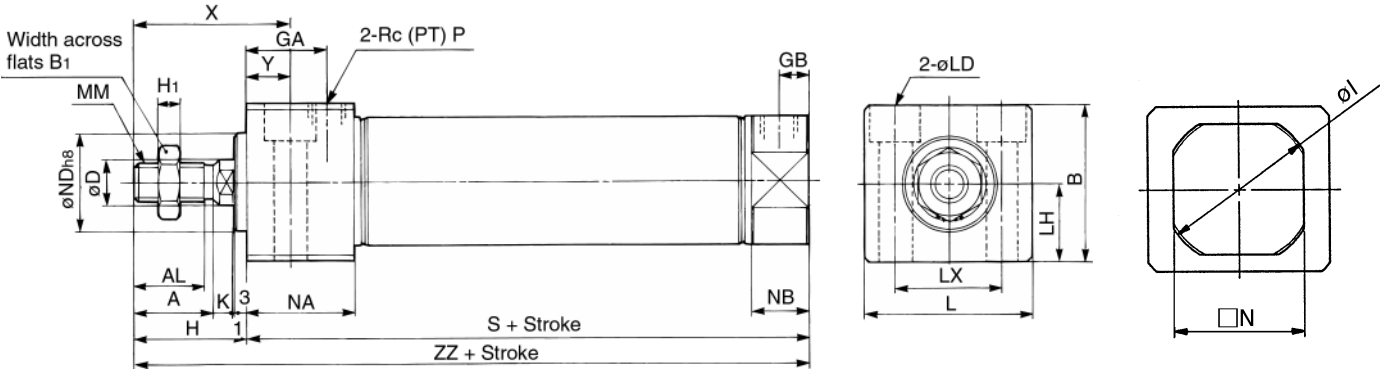

## With air cushion

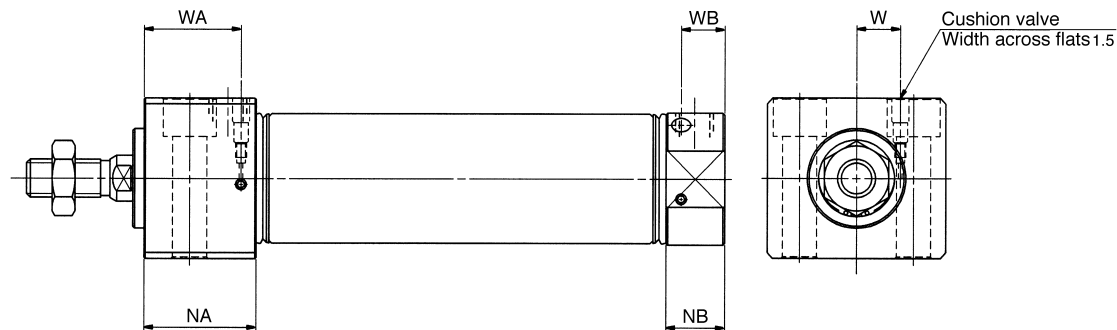

(mm)

Bore size	Stroke range
20	Up to 150
25	Up to 200
32	Up to 200
40	Up to 300

(mm)

Bore	A	AL	B	B1	D	GA	GB	H	H1	I	K	L	LD	LH	LX	MM	N	NA	NB	ND	P	S	X	Y	ZZ
20	18	15.5	30.3	13	8	22	8	27	5	28	5	33.5	ø5.5, ø9.5 Depth of counter bore 6.5	15	21	M8 X 1.25	24	29	15	20 <sup>0</sup> <sub>-0.033</sub>	1/8	76	39	12	103
25	22	19.5	36.3	17	10	22	8	31	6	33.5	5.5	39	ø6.6, ø11 Depth of counter bore 7.5	18	25	M10 X 1.25	30	29	15	26 <sup>0</sup> <sub>-0.033</sub>	1/8	76	43	12	107
32	22	19.5	42.3	17	12	22	8	31	6	37.5	5.5	47	ø9, ø14 Depth of counter bore 10	21	30	M10 X 1.25	34.5	29	15	26 <sup>0</sup> <sub>-0.033</sub>	1/8	78	43	12	109
40	24	21	52.3	22	14	27	11	34	8	46.5	7	58.5	ø11, ø17.5 Depth of counter bore 12.5	26	38	M14 X 1.5	42.5	37.5	21.5	32 <sup>0</sup> <sub>-0.039</sub>	1/4	104	49	15	138


## With air cushion

Bore	NA	NB	WA	WB	W
20	31.5	17.5	27	13	8.5
25	31.5	17.5	27	13	10.5
32	31.5	17.5	27	13	11.5
40	37.5	21.5	33.5	16	15


# Direct Mount: Double Acting Single Rod *Series CM2R*

## Front Mounting

CM2RB Bore size Stroke

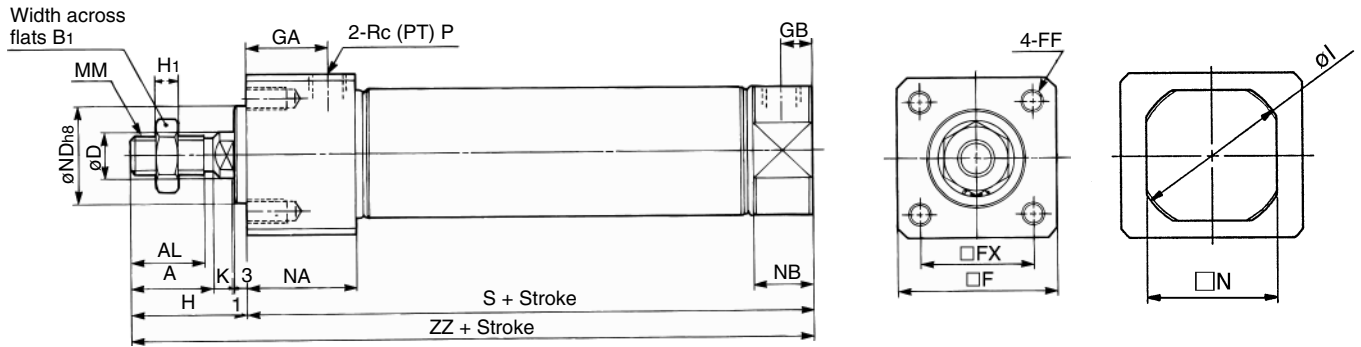

### With air cushion

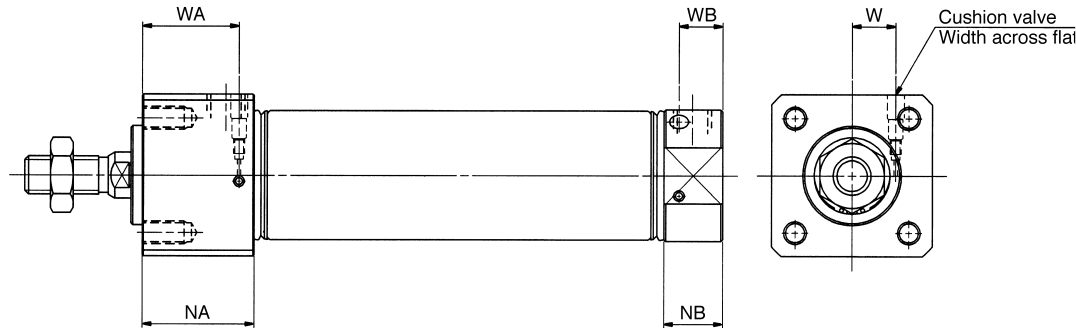

(mm)	
Bore size	Stroke range
20	Up to 150
25	Up to 200
32	Up to 200
40	Up to 300

(mm)																					
Bore	A	AL	B1	D	F	FF	FX	GA	GB	H	H1	I	K	MM	N	NA	NB	ND	P	S	ZZ
20	18	15.5	13	8	30.4	M5 X 0.8 Depth 9	22	22	8	27	5	28	5	M8 X 1.25	24	29	15	20 <sup>0</sup> <sub>-0.033</sub>	1/8	76	103
25	22	19.5	17	10	36.4	M6 X 1 Depth 11	26	22	8	31	6	33.5	5.5	M10 X 1.25	30	29	15	26 <sup>0</sup> <sub>-0.033</sub>	1/8	76	107
32	22	19.5	17	12	42.4	M6 X 1 Depth 11	30	22	8	31	6	37.5	5.5	M10 X 1.25	34.5	29	15	26 <sup>0</sup> <sub>-0.033</sub>	1/8	78	109
40	24	21	22	14	52.4	M8 X 1.25 Depth 14	36	27	11	34	8	46.5	7	M14 X 1.5	42.5	37.5	21.5	32 <sup>0</sup> <sub>-0.039</sub>	1/4	104	138

### With air cushion


Bore	NA	NB	WA	WB	W
20	31.5	17.5	27	13	8.5
25	31.5	17.5	27	13	10.5
32	31.5	17.5	27	13	11.5
40	37.5	21.5	33.5	16	15

# Direct Mount Non-rotating Rod: Double Acting Single Rod

## Series *CM2RK*

ø20, ø25, ø32, ø40

### How to Order

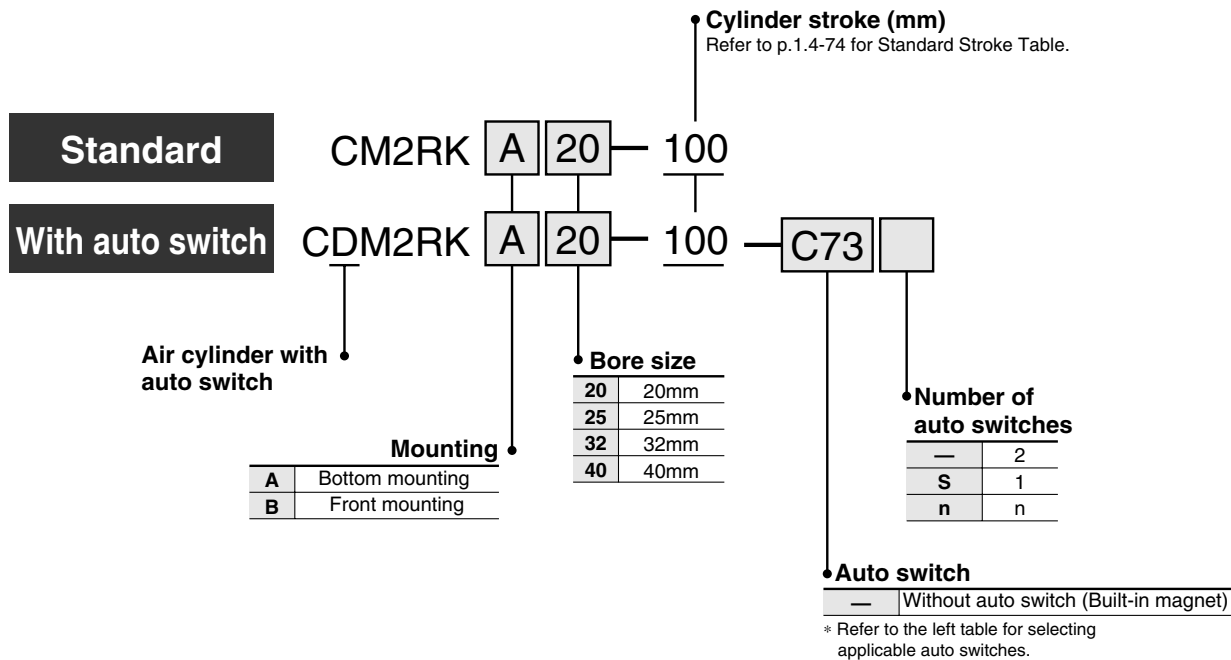

### Applicable Auto Switches/Refer to p.5.3-2 for further information on auto switches.

Style	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Auto switch model	Lead wire* (m)				Applicable load					
					DC	AC		0.5 (—)	3 (L)	5 (Z)	None (N)						
Reed switch	—	Grommet	Yes	3 wire (NPN)	—	5V	—	C76	●	●	—	—	IC	—			
						12V	100V	C73	●	●	●	—	—	Relay PLC			
			No			5V, 12V	100V or less	C80	●	●	—	—	IC	—			
						12V	—	B53	●	●	●	—	—	PLC			
			Yes			12V	100V, 200V	B54	●	●	●	—	—	Relay PLC			
						12V	200V or less	B64	●	●	—	—					
			Connector			Yes	2 wire	24V	12V	—	C73C	●	●	●	●	—	—
									5V, 12V	24V or less	C80C	●	●	●	●	IC	—
		No	12V	—	A33A	—			—	—	●	—	PLC				
			12V	100V, 200V	A34A	—			—	—	●			Relay PLC			
Terminal conduit	Yes	12V	—	A44A	—	—			—	●	—	Relay PLC					
		12V	100V, 200V	A44A	—	—			—	●							
DIN connector	Yes	Grommet	—	—	B59W	●			●	—	—	—	—				
			Diagnostic indicator (2 colour)	—	—	B59W			●	●	—	—	—	—			
Solid state switch	—	Grommet	Yes	3 wire(NPN)	5V, 12V	—	H7A1	●	●	○	—	IC	Relay PLC				
				3 wire(PNP)			H7A2	●	●	○	—						
			Connector	2 wire			12V	H7B	●	●	○	—		—			
				3 wire(NPN)			5V, 12V	H7C	●	●	●	●		—			
		Terminal conduit	2 wire	12V	G39A	—	—	—	●	IC							
			3 wire(PNP)	5V, 12V	K39A	—	—	—	●	—							
	Diagnostic indicator (2 colour)	Grommet	Yes	3 wire(NPN)	24V	—	H7NW	●	●	○	—	IC					
				3 wire(PNP)			H7PW	●	●	○	—						
				2 wire			H7BW	●	●	○	—						
				Water resistant (2 colour)			Grommet	Yes	2 wire	H7BA	—	●		○	—	—	
									3 wire(NPN)	G5NT	—	●		○	—	IC	
									4 wire (NPN)	H7NF	●	●		○	—		
				Diagnostic output (2 colour)			Grommet	Yes	4 wire (NPN)	H7LF	●	●		○	—		—
									Latch with diagnostic output (2 colour)	4 wire (NPN)	H7LF	●		●	○	—	—
										4 wire (NPN)	H7LF	●		●	○	—	—



\* Lead wire length

0.5m : —  
3m : L  
5m : Z  
None : N

e.g.) C80CZ, C80CN

\* Solid state switches marked with "○" are manufactured upon receipt of order.

\* Do not indicate symbol "N" for no lead wire on "D-A3□A", "A44A", "G39A" and "K39A" models.

# Direct Mount Non-rotating Rod: Double Acting Single Rod *Series CM2RK*

The CM2R Series direct mounting cylinder can be installed directly through the use of a square rod cover.

## High non-rotating accuracy

A type of cylinder in which the rod does not rotate because of its hexagonal shape.

ø20, ø25— $\pm 0.7^\circ$

ø32, ø40— $\pm 0.5^\circ$

## Space saving configuration



Because it is a directly mounted style without using brackets, its overall length is shorter, and its installation pitch can be made smaller. Thus, the space that is required for installation has been dramatically reduced.

## Improved installation accuracy and strength

A centring boss has been provided to improve the installation accuracy. Also, because it is the directly mounted style, the strength has been increased.


## Two styles of installation

Two styles of installations are available and can be selected according to the purpose: the front mounting style or the bottom mounting style.

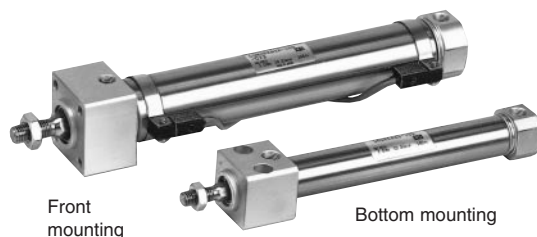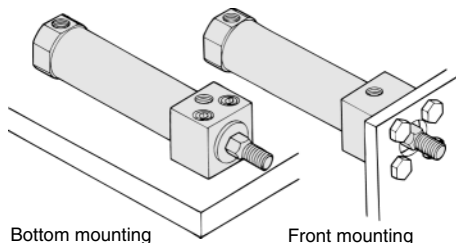

## JIS symbol

Double acting



## Specifications

Bore size (mm)	20	25	32	40
Action	Double acting/Single rod			
Fluid	Air			
Proof pressure	1.5MPa			
Max. operating pressure	1.0MPa			
Min. operating pressure	0.05MPa			
Ambient and fluid temperature	Without auto switch: $-10$ to $+70^\circ\text{C}$ (No freezing) With auto switch: $-10$ to $+60^\circ\text{C}$ (No freezing)			
Lubrication	Non-lube			
Thread tolerance	JIS class 2			
Stroke tolerance	$+1.4$ $0$			
Piping (Screw-in)	ø20 to ø32: Rc(PT) $\frac{1}{8}$ , ø40: Rc(PT) $\frac{1}{4}$			
Non-rotating rod accuracy	ø20, ø25: $\pm 0.7^\circ$ , ø32, ø40: $\pm 0.5^\circ$			
Piston speed (mm/s)	50 to 500			
Mounting	Bottom mounting, Front mounting			
Allowable kinetic energy	0.27J	0.4J	0.65J	1.2J

## Standard Stroke

Bore size (mm)	Standard stroke (mm) <sup>(1)</sup>
20	25, 50, 75, 100, 125, 150
25	25, 50, 75, 100, 125, 150, 200
32	25, 50, 75, 100, 125, 150, 200
40	25, 50, 75, 100, 125, 150, 200, 250, 300

Note 1) Other intermediate strokes can be manufactured upon receipt of order.  
Contact SMC for longer strokes.

## Minimum Strokes for Auto Switch Mounting

Refer top.1.4-4 for minimum stroke table.

## Auto Switch Mounting Position

The auto switch position (at stroke end) is the same as the standard style.  
Refer to p.1.4-21.

## Auto Switch Mounting Bracket Part No.

Auto switch model	Bore size (mm)			
	20	25	32	40
D-C7/C8 D-H7□	BM2-020	BM2-025	BM2-032	BM2-040
D-B5/B6 D-G5NTL	BA2-020	BA2-025	BA2-032	BA2-040
D-A3□A/A44A D-G39A/K39A	BM3-020	BM3-025	BM3-032	BM3-040



Note) A set of following stainless steel mounting screws is attached.  
(A switch mounting band is not attached. Please order the band separately.)  
BBA4: D-C7/C8/H7  
· "D-H7BAL" switch is set on the cylinder with the screws above when shipped.  
When a switch only is shipped, "BBA4" screws are attached.

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1



# Series CM2RK

## Copper Free

20-CM2RK    Mounting    Bore size    Stroke

• Copper free

This cylinder eliminates any influences of copper ions or fluororesins on colour CRTs. Copper materials have been nickel plated or replaced with non-copper materials to prevent the generation of copper ions.



## Specifications

Action	Double acting/Single rod
Bore size	ø20, ø25, ø32, ø40
Max. operating pressure	1.0MPa
Min. operating pressure	0.05MPa
Cushion	Rubber bumper
Piston speed	50 to 500mm/s
Mounting	Bottom mounting, Front mounting

\* Auto switches can be mounted.

## Accessories

Accessories	Standard	Option	
	Rod end nut	Single knuckle joint	Double knuckle joint (with pins)*
Bottom mounting	●	●	●
Front mounting	●	●	●

\* Knuckle pins and snap rings (cotter pins for ø40) are attached.

## Weight

Bore size (mm)		20	25	32	40
Basic weight	Bottom mounting	0.14	0.23	0.32	0.63
	Front mounting	0.14	0.22	0.32	0.62
Additional weight by each 50 stroke		0.04	0.07	0.09	0.14

Calculation Example: CM2RA32-100 (ø32, 100 stroke, Bottom mounting)

- Basic weight : 0.32kg
- Additional weight: 0.09kg
- Cylinder stroke : 100mm  
 $0.32 + 0.09 \times 100/50 = 0.50\text{kg}$

## ⚠ Precautions

Be sure to read before handling. Refer to p.0-39 to 0-43 for Safety Instructions and common precautions and refer to p.1.4-5 for those on CM2 series.


## Handling

## ⚠ Cautions

- ① **Avoid using the air cylinder in such a way that rotational torque would be applied to the piston rod.**
  - If rotational torque is applied, the non-rotating guide will become deformed, thus affecting the non-rotating accuracy. Refer to the table below for the approximate values of the allowable range of rotational torque.

Allowable rotational torque Nm	ø20	ø25	ø32	ø40
	0.2	0.25	0.25	0.44

- To screw a bracket or a nut onto the threaded portion at the tip of the piston rod, make sure to retract the piston rod entirely, and place a wrench over the flat portion of the rod that protrudes. To tighten, take precautions to prevent the tightening torque from being applied to the non-rotating guide.

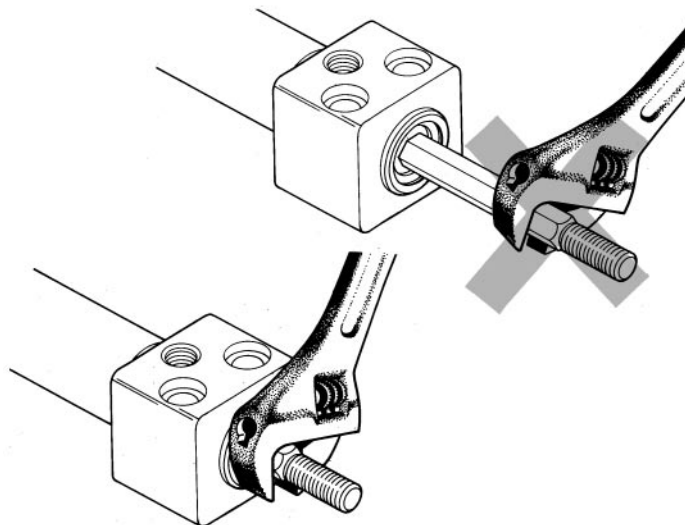


- ② **To replace a rod seal, contact SMC.**

A rod seal could lead to an air leak, depending on the position in which it is fitted.

Therefore, make sure to contact SMC if a rod seal must be replaced.

# Direct Mount Non-rotating Rod: Double Acting Single Rod *Series CM2RK*

## Construction

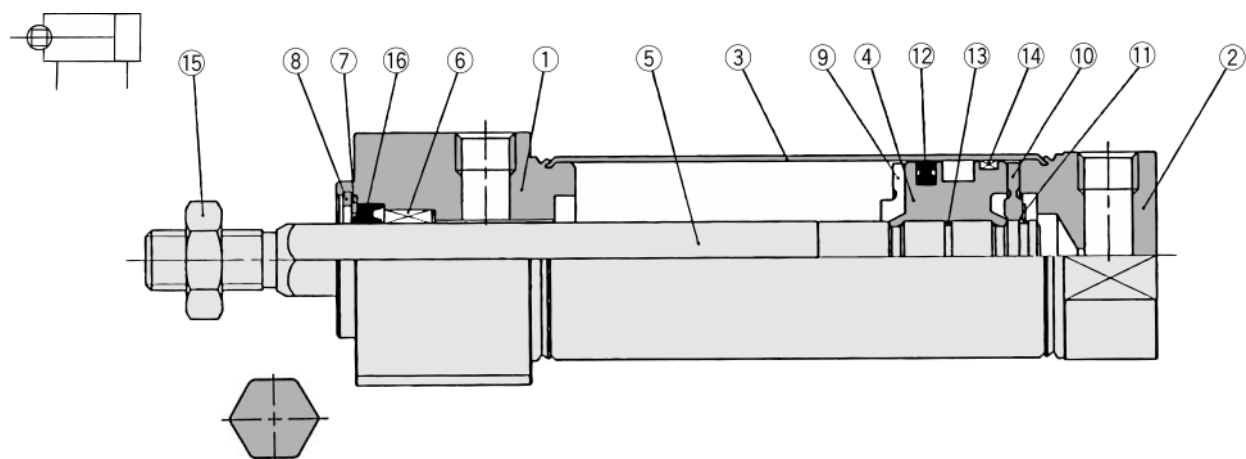

Rod section

### Component Parts

No.	Description	Material	Note
①	Rod cover	Aluminum alloy	White anodized
②	Head cover	Aluminum alloy	White anodized
③	Cylinder tube	Stainless steel	
④	Piston	Aluminum alloy	Chromated
⑤	Piston rod	Carbon steel	
⑥	Non-rotating guide	Oil impregnated sintered alloy	
⑦	Seal retainer	Rolled steel	Nickel plated
⑧	Snap ring	Carbon steel	Nickel plated
⑨	Bumper A	Urethane	
⑩	Bumper B	Urethane	
⑪	Snap ring	Stainless steel	
⑫	Piston seal	NBR	
⑬	Piston gasket	NBR	
⑭	Wearing	Resin	
⑮	Rod end nut	Carbon steel	Nickel plated

### Replacement Parts

No.	Description	Material	Bore size(mm)/Part No.			
			20	25	32	40
⑮	Rod seal	NBR	PDR-8W	PDR-10W	PDR-12W	PDR-14W

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92


CA1

CS1

# Series CM2RK

## Bottom Mounting


CM2RKA Bore size Stroke

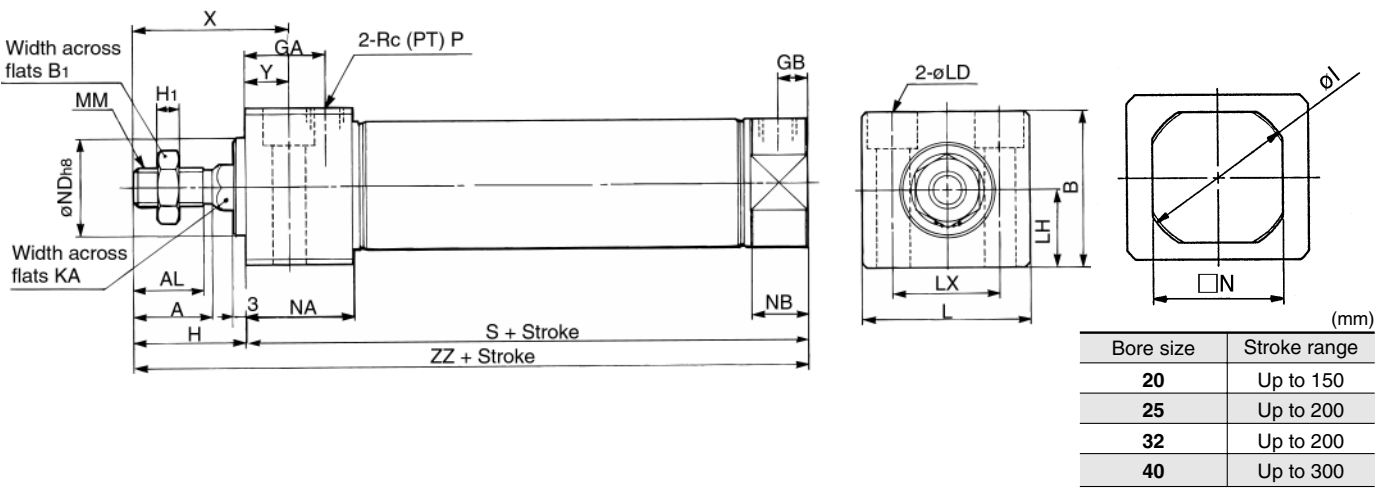

Bore	A	AL	B	B1	GA	GB	H	H1	I	KA	L	LD	LH	LX	MM	N	NA	NB	ND	P	S	X	Y	ZZ
20	18	15.5	30.3	13	22	8	27	5	28	8.2	33.5	ø5.5, ø9.5 Depth of counter bore 6.5	15	21	M8 X 1.25	24	29	15	20 <sup>0</sup> <sub>-0.033</sub>	1/8	76	39	12	103
25	22	19.5	36.3	17	22	8	31	6	33.5	10.2	39	ø6.6, ø11 Depth of counter bore 7.5	18	25	M10 X 1.25	30	29	15	26 <sup>0</sup> <sub>-0.033</sub>	1/8	76	43	12	107
32	22	19.5	42.3	17	22	8	31	6	37.5	12.2	47	ø9, ø14 Depth of counter bore 10	21	30	M10 X 1.25	34.5	29	15	26 <sup>0</sup> <sub>-0.033</sub>	1/8	78	43	12	109
40	24	21	52.3	22	27	11	34	8	46.5	14.2	58.5	ø11, ø17.5 Depth of counter bore 12.5	26	38	M14 X 1.5	42.5	37.5	21.5	32 <sup>0</sup> <sub>-0.039</sub>	1/4	104	49	15	138

## Front Mounting

CM2RKB Bore size Stroke

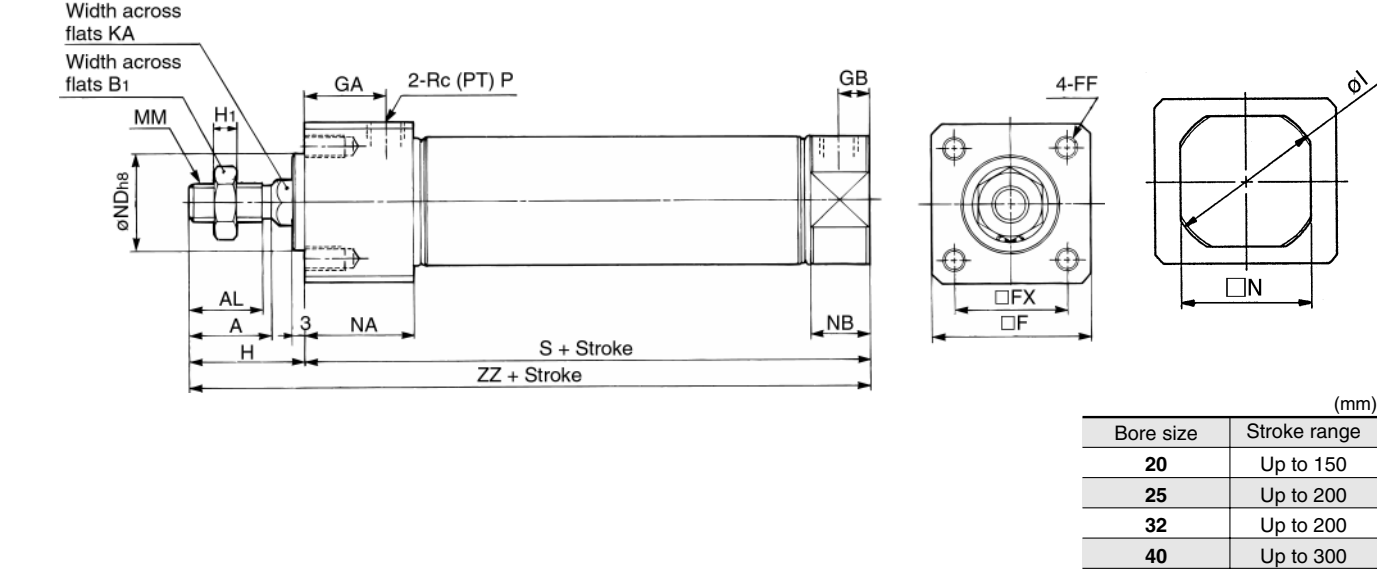

Bore	A	AL	B1	F	FF	FX	GA	GB	H	H1	I	KA	MM	N	NA	NB	ND	P	S	ZZ
20	18	15.5	13	30.4	M5 X 0.8 Depth 9	22	22	8	27	5	28	8.2	M8 X 1.25	24	29	15	20 <sup>0</sup> <sub>-0.033</sub>	1/8	76	103
25	22	19.5	17	36.4	M6 X 1 Depth 11	26	22	8	31	6	33.5	10.2	M10 X 1.25	30	29	15	26 <sup>0</sup> <sub>-0.033</sub>	1/8	76	107
32	22	19.5	17	42.4	M6 X 1 Depth 11	30	22	8	31	6	37.5	12.2	M10 X 1.25	34.5	29	15	26 <sup>0</sup> <sub>-0.033</sub>	1/8	78	109
40	24	21	22	52.4	M8 X 1.25 Depth 14	36	27	11	34	8	46.5	14.2	M14 X 1.5	42.5	37.5	21.5	32 <sup>0</sup> <sub>-0.039</sub>	1/4	104	138

# Low Friction: Double Acting Single Rod

## Series CM2Q

ø20, ø25, ø32, ø40

### How to Order

**Mounting**

<b>B</b>	Basic	<b>T</b>	Rear trunnion
<b>L</b>	Axial foot	<b>E</b>	Integrated clevis
<b>F</b>	Front flange	<b>BZ</b>	Boss-cut basic
<b>G</b>	Rear flange	<b>FZ</b>	Boss-cut front flange
<b>C</b>	Single clevis	<b>UZ</b>	Boss-cut front trunnion
<b>D</b>	Double clevis		
<b>U</b>	Front trunnion		

**Cylinder stroke (mm)**  
Refer to p.1.4-79 for Standard Stroke Table.

**Low friction direction**

<b>F</b>	Side at pressure When pressurized on head side
<b>B</b>	Side at pressure When pressurized on rod side

**Standard**

CM2Q L 40 — 150 F

**With auto switch**

CDM2Q L 40 — 150 F — C73

**Air cylinder with auto switch**

**Bore size**

20	20mm
25	25mm
32	32mm
40	40mm

**Number of auto switches**

—	2
S	1
n	n

**Auto switch**

—	Without auto switch (Built-in magnet)
---	---------------------------------------

\* Refer to the left table for selecting applicable auto switches.

#### Applicable Auto Switches/Refer to p.5.3-2 for further information on auto switches.

Style	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Auto switch model	Lead wire* (m)				Applicable load
					DC	AC		0.5 (—)	3 (L)	5 (Z)	None (N)	
Reed switch	—	Grommet	Yes	3 wire (NPN)	—	5V	<b>C76</b>	●	●	—	—	IC
					—	12V	<b>C73</b>	●	●	●	—	Relay PLC
			No	2 wire	5V, 12V	100V or less	<b>C80</b>	●	●	—	—	IC
					12V	—	<b>B53</b>	●	●	●	—	PLC
			Yes	2 wire	12V	100V, 200V	<b>B54</b>	●	●	●	—	Relay PLC
					12V	200V or less	<b>B64</b>	●	●	—	—	
			No	2 wire	5V, 12V	24V or less	<b>C73C</b>	●	●	●	—	IC
					5V, 12V	24V or less	<b>C80C</b>	●	●	●	—	
			Yes	2 wire	12V	—	<b>A33A</b>	—	—	—	●	PLC
					12V	100V, 200V	<b>A34A</b>	—	—	—	●	Relay PLC
Solid state switch	—	Grommet	Yes	3 wire (NPN)	—	—	<b>A44A</b>	—	—	—	●	
					—	—	<b>B59W</b>	—	—	—	—	Relay PLC
			No	2 wire	5V, 12V	—	<b>H7A1</b>	●	●	—	—	
					5V, 12V	—	<b>H7A2</b>	●	●	—	—	
			Yes	2 wire	12V	—	<b>H7B</b>	●	●	—	—	
					12V	—	<b>H7C</b>	●	●	—	—	
			No	2 wire	5V, 12V	—	<b>G39A</b>	—	—	—	●	
					12V	—	<b>K39A</b>	—	—	—	●	
			Yes	3 wire (NPN)	5V, 12V	—	<b>H7NW</b>	●	●	—	—	
					5V, 12V	—	<b>H7PW</b>	●	●	—	—	
			No	2 wire	12V	—	<b>H7BW</b>	●	●	—	—	
					12V	—	<b>H7BA</b>	—	—	—	—	
			Yes	3 wire (NPN)	5V, 12V	—	<b>G5NT</b>	—	●	—	—	
					5V, 12V	—	<b>H7NF</b>	●	●	—	—	
			No	4 wire (NPN)	—	—	<b>H7LF</b>	●	●	—	—	



\* Lead wire length

0.5m : —  
3m : L  
5m : Z  
None : N

e.g.) C80CZ, C80CN

\* Solid state switches marked with "○" are manufactured upon receipt of order.


\* Do not indicate symbol "N" for no lead wire on "D-A3□A", "A44A", "G39A" and "K39A" models.

# Series CM2Q

**Designed with a low sliding resistance of the piston, this air cylinder is ideal for applications such as contact pressure control, which requires smooth movements at low pressures.**


**Low sliding resistance  
Minimum operating pressure: 0.025MPa  
Stable sliding resistance**

The sliding resistance remains stable even when the operating pressure changes.

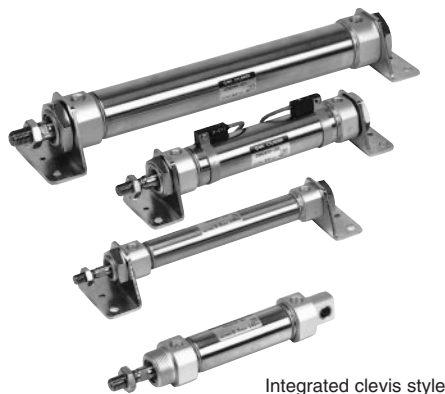

## JIS symbol


Double acting/Single rod



## Application Example

A low friction cylinder is used in combination with a precision regulator (Series IR, etc.).

- ① Even if the external diameter of the winding roller changes, the changes in the pressing force against the drive roller are kept low.
- ② Even if there is any change in the shape of the moving object, the changes in the  $f$  value of the cylinder's pressing force are kept low, resulting in a stable pressing force.

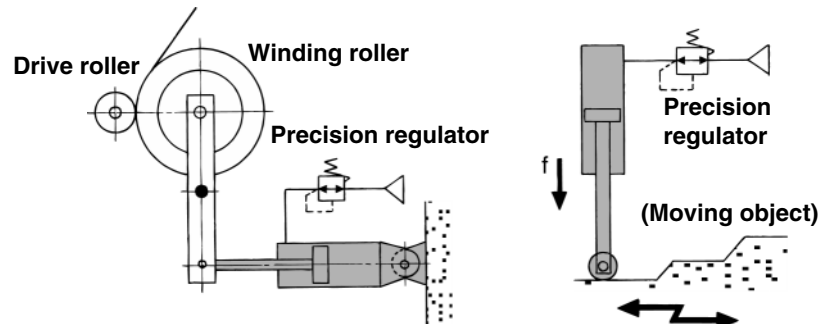

## Specifications

Bore size (mm)	20	25	32	40
Action	Double acting/Single rod			
Low friction direction	One direction			
Fluid	Air			
Proof pressure	1.05MPa			
Max. operating pressure	0.7MPa			
Min. operating pressure	0.025MPa			
Ambient and fluid temperature	Without auto switch: -10 to +70°C (No freezing) With auto switch: -10 to +60°C (No freezing)			
Allowable leakage	0.5 $\epsilon$ /min (ANR) or less			
Lubrication	Non-lube			
Thread tolerance	JIS class 2			
Stroke tolerance	+1.4 0			
Cushion	Rubber bumper			
Piping (Screw-in)	Rc(PT) $\frac{1}{8}$			Rc(PT) $\frac{1}{4}$

## Standard Stroke

Bore size (mm)	Standard stroke (mm)	Long stroke <sup>(2)</sup> (mm)
20	25, 50, 75, 100, 125, 150 200, 250, 300	400
25		450
32		450
40		500



- Note 1) Any intermediate stroke that is not indicated above will be produced on order.
- Note 2) The long stroke style is applicable to the axial foot style and the rod side flange style. If other mounting brackets are used or the application exceeds the long stroke limit, the maximum stroke that can be used is determined based on the stroke selection table in technical data.
- Note 3) The longer the stroke, the greater the sliding resistance could become, due to the deflection of the piston rod. Therefore, consider installing a guide for such operation.
- Note 4) Contact SMC for applications that exceed the stroke ranges shown above. (The maximum manufacturable stroke is 1000mm.)

## Minimum Strokes for Auto Switch Mounting

Refer to p.1.4-4 for minimum stroke table.

## Mounting Accessories

Accessories	Standard			Option		
	Mounting nut	Rod end nut	Clevis pin	Single knuckle joint	Double knuckle joint	Pivot bracket
Basic	● (1 pc.)	●	—	●	●	—
Axial foot	● (2)	●	—	●	●	—
Front flange	● (1)	●	—	●	●	—
Rear flange	● (1)	●	—	●	●	—
Integrated clevis	— (1)	●	—	●	●	●
Single clevis	— (1)	●	—	●	●	—
Double clevis	— (1)	●	●	●	●	—
Front trunnion	● (1) <sup>(2)</sup>	●	—	●	●	—
Rear trunnion	● (1) <sup>(2)</sup>	●	—	●	●	—
Boss-cut basic	● (1)	●	—	●	●	—
Boss-cut flange	● (1)	●	—	●	●	—
Boss-cut trunnion	● (1)	●	—	●	●	—
Note					With pins	With pins



Note 1) Mounting nuts are not attached for the integrated clevis, the single clevis, and the double clevis styles.

Note 2) Trunnion nuts are attached for the front and rear trunnion styles.

## Weight

Bore size (mm)		(kg)			
		20	25	32	40
Basic weight	Basic style	0.14	0.21	0.28	0.56
	Axial foot style	0.29	0.37	0.44	0.83
	Flange style	0.20	0.30	0.37	0.68
	Integrated clevis style	0.12	0.19	0.27	0.52
	Single clevis style	0.18	0.25	0.32	0.65
	Double clevis style	0.19	0.27	0.33	0.69
	Trunnion style	0.18	0.28	0.34	0.66
	Boss-cut basic style	0.13	0.19	0.26	0.53
	Boss-cut flange style	0.19	0.28	0.35	0.65
	Boss-cut trunnion style	0.17	0.26	0.32	0.63
Additional weight by each 50 stroke		0.04	0.06	0.08	0.13
Accessory	Pivot bracket (with pins)	0.07	0.07	0.14	0.14
	Single knuckle joint	0.06	0.06	0.06	0.23
	Double knuckle joint (with pins)	0.07	0.07	0.07	0.20

Calculation Example: CM2L32-100

- Basic weight: ..... 0.44 (Foot, ø32)
  - Additional weight: ... 0.08/50 stroke
  - Cylinder stroke: ..... 100 stroke
- $0.44 + 0.08 \times 100/50 = 0.60\text{kg}$

## Mounting Bracket Part No.

Bore size(mm)	20	25	32	40
Axial foot*	CM-L020B	CM-L032B	CM-L040B	
Flange	CM-F020B	CM-F032B	CM-F040B	
Single clevis	CM-C020B	CM-C032B	CM-C040B	
Double clevis (with pins)**	CM-D020B	CM-D032B	CM-D040B	
Trunnion (with nuts)	CM-T020B	CM-T032B	CM-T040B	

\* Two foot brackets and a mounting nut are attached.

\*\* Clevis pins and snap rings (cotter pins for bore size 40) are attached.

## Auto Switch Mounting Bracket Part No.

Auto switch model	Bore size (mm)			
	20	25	32	40
D-C7/C8 D-H7□	BM2-020	BM2-025	BM2-032	BM2-040
D-B5/B6 D-G5NTL	BA2-020	BA2-025	BA2-032	BA2-040
D-A3□A/A44A D-G39A/K39A	BM3-020	BM3-025	BM3-032	BM3-040



A set of following stainless steel mounting screws is attached.

(A switch mounting band is not attached. Please order the band separately.)

BBA4: D-C7/C8/H7

• "D-H7BAL" switch is set on the cylinder with the screws above when shipped.

When a switch only is shipped, "BBA4" screws are attached

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1



## Boss-cut Style

Boss for the head cover bracket is eliminated and the total length of cylinder is shortened.




Comparison of total cylinder length with standard style (mm)

ø20	ø25	ø32	ø40
▲13	▲13	▲13	▲16

## Mounting

- Boss-cut basic (BZ)
- Boss-cut flange (FZ)
- Boss-cut trunnion (UZ)

## Sliding Resistance of The Low Friction Side

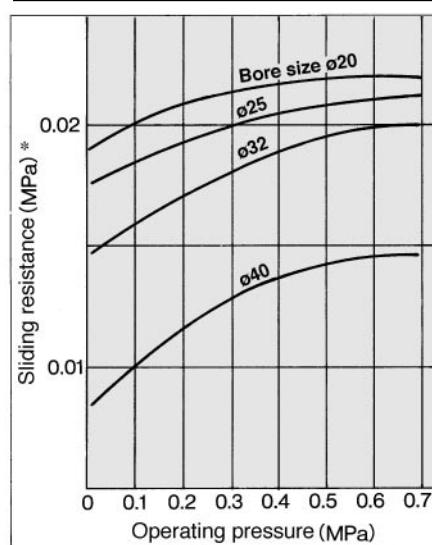

\* Conversion into the cylinder operating pressure:

## Selecting The Low Friction Direction

To use the air cylinder as a balancer, pressurize it only from one of the ports as shown in the application example, and keep the other port open to the atmosphere.

To operate by applying pressure from the rod cover port:

Low friction direction B <Application example ①>

To operate by applying pressure from the head cover port:

Low friction direction F <Application example ②>

In either case, if the piston rod is moved by an external force, it will effect low friction operation both in the extending and retracting directions.



## Precautions

Be sure to read before handling. Refer to p.0-39 to p.0-43 for Safety Instructions and common precautions and refer to p.1.4-5 for those on CM2 series.

### Handling




## Warning

- ① In the direction of low friction operation, speed control must be effected through the meter-in system. With meter-out control, the exhaust pressure will increase and create a greater sliding resistance.

# Low Friction: Double Acting Single Rod *Series CM2Q*

## Construction

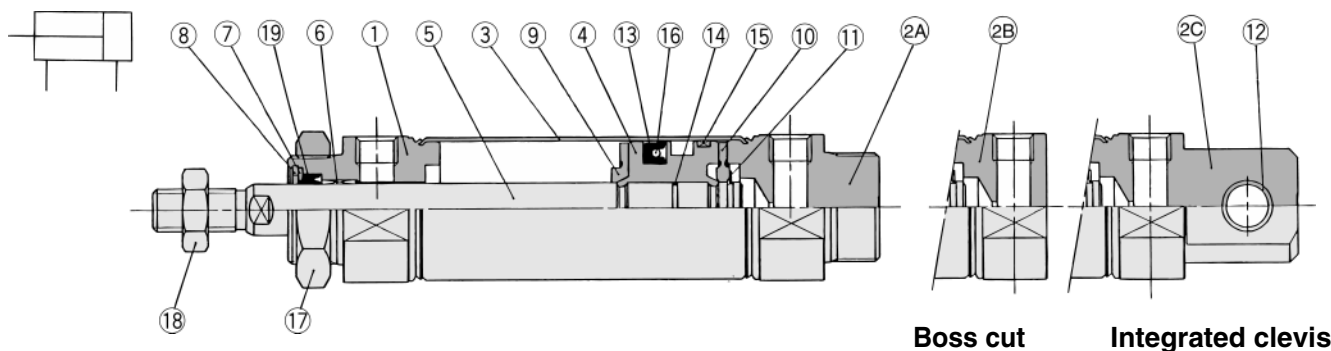

## Component Parts

No.	Description	Material	Note
①	Rod cover	Aluminum alloy	White anodized
2A	Head cover A	Aluminum alloy	White anodized (Standard style)
2B	Head cover B	Aluminum alloy	White anodized (Boss-cut style)
2C	Head cover C	Aluminum alloy	White anodized (Integrated clevis style)
③	Cylinder tube	Stainless steel	
④	Piston	Aluminum alloy	Chromated
⑤	Piston rod	Carbon steel	Hard chrome plated
⑥	Bushing	Oil impregnated sintered alloy	
⑦	Seal retainer	Rolled steel	Nickel plated
⑧	Snap ring	Carbon steel	Nickel plated
⑨	Bumper A	Urethane	
⑩	Bumper B	Urethane	


No.	Description	Material	Note
⑪	Snap ring	Stainless steel	
⑫	Bushing for clevis	Oil impregnated sintered alloy	
⑬	Piston seal	NBR	
⑭	Piston gasket	NBR	
⑮	Wearing	Resin	
⑯	Back up O ring	NBR	
⑰	Mounting nut	Carbon steel	Nickel plated
⑱	Rod end nut	Carbon steel	Nickel plated

## Replacement Parts


No.	Description	Material	Bore size(mm)/Part No.			
			20	25	32	40
⑲	Rod seal	NBR	PDU-8Z	PDU-10Z	PDU-12LZ	PDU-14LZ

## Basic (B)

CM2QB Bore size Stroke

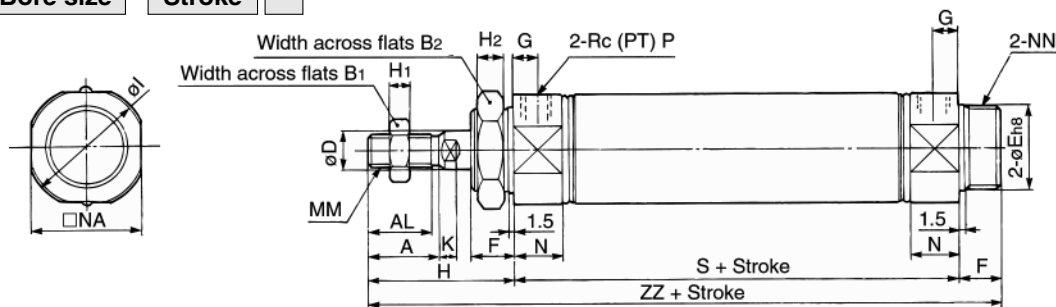

## Boss cut

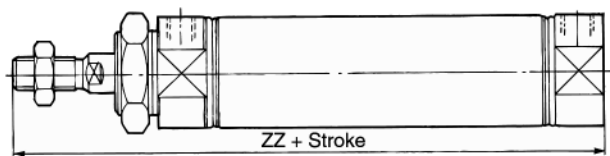

Bore	Stroke range	A	AL	B <sub>1</sub>	B <sub>2</sub>	D	E	F	G	H	H <sub>1</sub>	H <sub>2</sub>	I	K	MM	N	NA	NN	P	S	ZZ
20	1 to 300	18	15.5	13	26	8	20 <sup>-0.033</sup>	13	8	41	5	8	28	5	M8 X 1.25	15	24	M20 X 1.5	1/8	65	119
25	1 to 300	22	19.5	17	32	10	26 <sup>-0.033</sup>	13	8	45	6	8	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	1/8	65	123
32	1 to 300	22	19.5	17	32	12	26 <sup>-0.033</sup>	13	8	45	6	8	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	1/8	67	125
40	1 to 300	24	21	22	41	14	32 <sup>-0.039</sup>	16	11	50	8	10	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	1/4	91	157

## Boss-cut

Bore	ZZ
20	106
25	110
32	112
40	141

## Dimensions for Other Mounting Brackets

Add 3mm to each "ZZ" dimension of the standard style (double acting/single rod) on p.1.4-10 to 1.4-18.

## Auto Switch Position


Add 3mm to each "A" dimension of the standard style (double acting/single rod) on p.1.4-21.

# Centralized Piping: Double Acting Single Rod

## Series **CM2□P**

ø20, ø25, ø32, ø40

### How to Order

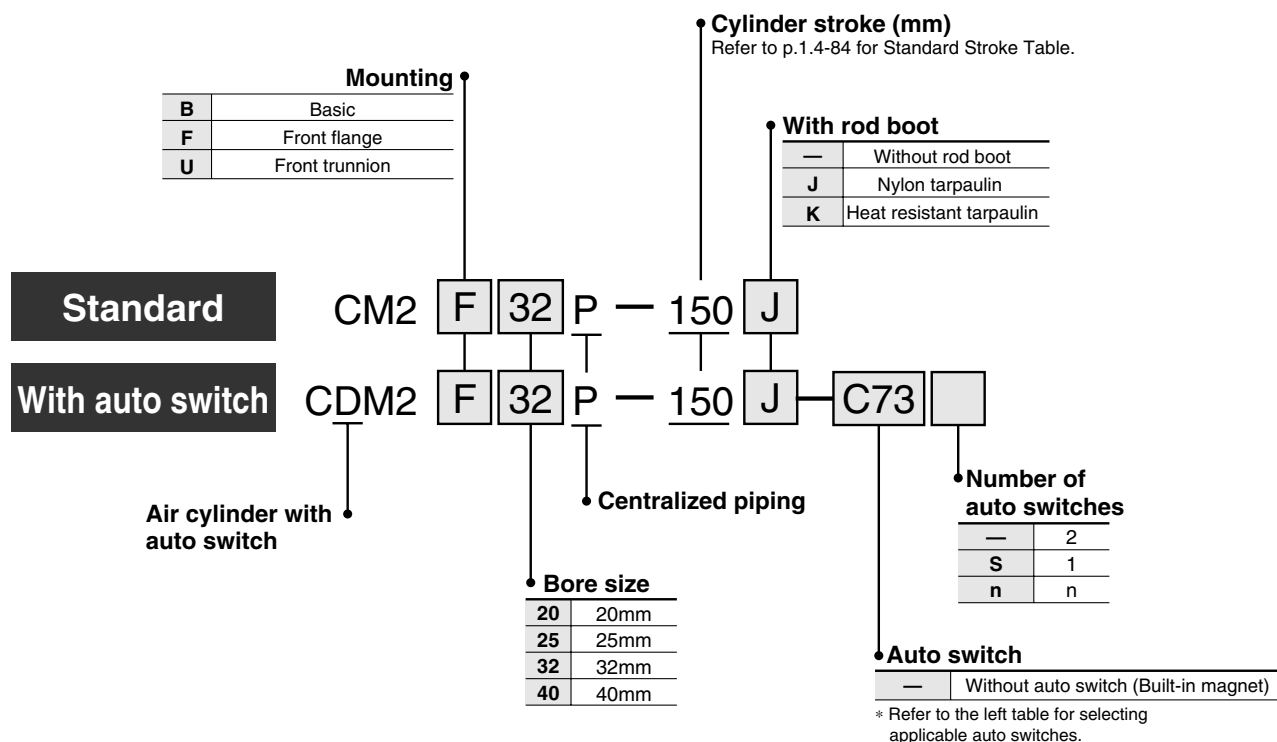

### Applicable Auto Switches/Refer to p.5.3-2 for further information on auto switches.

Style	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Auto switch model	Lead wire* (m)				Applicable load
					DC	AC		0.5 (—)	3 (L)	5 (Z)	None (N)	
Reed switch	—	Grommet	Yes	3 wire (NPN)	—	5V	C76	●	●	—	—	IC
					—	12V	C73	●	●	—	—	Relay PLC
			No	2 wire	5V, 12V	100V or less	C80	●	●	—	—	IC
					12V	—	B53	●	●	●	—	PLC
	Diagnostic indicator (2 colour)	Connector	Yes	2 wire	12V	100V, 200V	B54	●	●	●	—	Relay PLC
					12V	200V or less	B64	●	●	—	—	
			No	2 wire	12V	—	C73C	●	●	●	●	IC
					5V, 12V	24V or less	C80C	●	●	●	●	Relay PLC
Solid state switch	—	Grommet	Yes	3 wire (NPN)	—	—	B59W	●	●	—	—	Relay PLC
					5V, 12V	—	H7A1	●	●	○	—	IC
			No	2 wire	12V	—	H7A2	●	●	○	—	Relay PLC
					12V	—	H7B	●	●	○	—	
	Diagnostic indicator (2 colour)	Connector	Yes	3 wire (NPN)	5V, 12V	—	H7C	●	●	●	●	IC
					5V, 12V	—	H7NW	●	●	○	—	
			No	2 wire	12V	—	H7PW	●	●	○	—	Relay PLC
					12V	—	H7BW	●	●	○	—	
	Water resistant (2 colour)	Grommet	Yes	3 wire (NPN)	5V, 12V	—	H7BA	—	●	○	—	IC
					5V, 12V	—	G5NT	—	●	○	—	
			No	2 wire	12V	—	H7NF	●	●	○	—	Relay PLC
					12V	—	H7LF	●	●	○	—	



\* Lead wire length

0.5m : —  
3m : L  
5m : Z  
None : N  
e.g.) C80CZ, C80CN

\* Solid state switches marked with "○" are manufactured upon receipt of order.

# Centralized Piping: Double Acting Single Rod *Series CM2□P*

A cylinder in which two piping ports are provided in the head cover, enabling pipes to be connected only in the axial direction.



## Specifications

Bore size (mm)	20	25	32	40
Action	Double acting/Single rod			
Fluid	Air			
Proof pressure	1.5MPa			
Max. operating pressure	1.0MPa			
Min. operating pressure	0.05MPa			
Ambient and fluid temperature	Without auto switch: -10 to +70°C (No freezing) With auto switch: -10 to +60°C (No freezing)			
Lubrication	Non-lube			
Thread tolerance	JIS class 2			
Stroke tolerance	+1.4 0			
Piston speed	Rubber bumper			
Cushion	50 to 700 mm/s	50 to 650 mm/s	50 to 590 mm/s	50 to 240 mm/s
Allowable kinetic energy	0.27J	0.4J	0.65J	1.2J

## Standard Stroke

Bore size (mm)	Standard stroke (mm) <sup>(1)</sup>	Long stroke <sup>(2)</sup> (mm)
20	25, 50, 75, 100, 125, 150	400
25		450
32		450
40	200, 250, 300	500

Note 1) Other intermediate strokes can be manufactured upon receipt of order.

Note 2) Long stroke applies to the front flange style. If other mounting brackets are used or the application exceeds the long stroke limit, the maximum stroke is determined based on the stroke selection table in technical data.

## Mounting Accessories

Accessories	Standard		Option		
	Mounting nut	Rod end nut	Single knuckle joint	Double knuckle joint (with pins) *	Rod boot
Basic	● (1pc.)	●	●	●	●
Front flange	● (1pc.)	●	●	●	●
Front trunnion	● (1pc.)	●	●	●	●

\* Pins and snap rings (cotter pins for ø40) are attached.

## Mounting Bracket Part No.

Bore size (mm)	20	25	32	40
Flange	CM-F020B	CM-F032B	CM-F040B	
Trunnion (with nuts)	CM-T020B	CM-T032B	CM-T040B	

## Auto Switch Mounting Bracket Part No.

Auto switch model	Bore size (mm)			
	20	25	32	40
D-C7/C8 D-H7□	BM2-020	BM2-025	BM2-032	BM2-040
D-B5/B6 D-G5NTL	BA2-020	BA2-025	BA2-032	BA2-040




Note) A set of following stainless steel mounting screws is attached. (A switch mounting band is not attached. Please order the band separately.)

BBA4: D-C7/C8/H7

· "D-H7BAL" switch is set on the cylinder with the screws above when shipped.  
When a switch only is shipped, "BBA4" screws are attached.

## JIS symbol

Double acting/Single rod



## Precautions

Be sure to read before handling. Refer to p.0-39 to 0-43 for Safety Instructions and common precautions and refer to p.1.4-5 for those on CM2 series.

CJ1

CJP

CJ2

CM2

C85

C76

CG1

MB

MB1

CP95

C95

C92

CA1

CS1

# Series CM2□P

## Rod Boot Materials

Symbol	Material	Max. ambient temperature
<b>J</b>	Nylon tarpaulin	70°C
<b>K</b>	Neoprene cloth	110°C*

\* Maximum ambient temperature for the gaiter only.

## Weight

Bore size (mm)		(kg)			
		20	25	32	40
Basic weight	Basic	0.14	0.21	0.27	0.58
	Front flange	0.20	0.30	0.36	0.70
	Front trunnion	0.18	0.28	0.33	0.68
Additional weight by each 50 stroke		0.05	0.08	0.10	0.17
Accessory	Single knuckle joint	0.06	0.06	0.06	0.23
	Double knuckle joint (with pins)	0.07	0.07	0.07	0.20

Calculation example: CM2F32P-100

- Basic weight : 0.36
- Additional weight: 0.10
- Cylinder stroke : 100 stroke  
 $0.36 + 0.10 \times 100/50 = 0.56\text{kg}$

## Copper Free

20-CM2 Mounting Bore size P — Stroke

### Copper free

This cylinder eliminates any influences of copper ions or fluororesins on colour CRTs. Copper materials have been nickel plated or replaced with non-copper materials to prevent the generation of copper ions.




## Specifications

Action	Double acting/Single rod	
Bore size	ø20, ø25, ø32, ø40	
Max. operating pressure	1.0MPa	
Min. operating pressure	0.05MPa	
Piston speed	ø20	50 to 700mm/s
	ø25	50 to 650mm/s
	ø32	50 to 590mm/s
	ø40	50 to 420mm/s
Mounting	Basic, Front flange, Front trunnion	

\* Auto switches can be mounted.

# Centralized Piping: Double Acting Single Rod *Series CM2□P*

## Construction

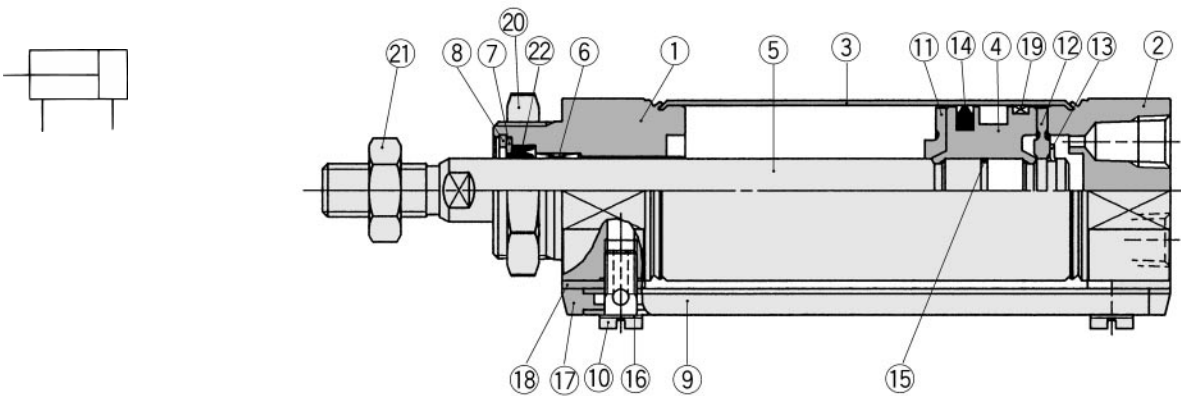

### Component Parts

No.	Description	Material	Note
①	Rod cover	Aluminum alloy	White anodized
②	Head cover	Aluminum alloy	White anodized
③	Cylinder tube	Stainless steel	
④	Piston	Aluminum alloy	Chromated
⑤	Piston rod	Carbon steel	Hard chrome plated
⑥	Bushing	Oil impregnated sintered alloy	
⑦	Seal retainer	Rolled steel	Nickel plated
⑧	Snap ring	Carbon steel	Nickel plated
⑨	Pipe	Aluminum alloy	White alumite
⑩	Stud	Brass	Electroless nickel plated
⑪	Bumper A	Urethane	
⑫	Bumper B	Urethane	


No.	Description	Material	Note
⑬	Snap ring	Stainless steel	
⑭	Piston seal	NBR	
⑮	Piston gasket	NBR	
⑯	Gasket	Resin	
⑰	Pipe gasket	Urethane rubber	
⑱	Spacer gasket	Resin	Except for ø25
⑲	Wearing	Resin	
⑳	Mounting nut	Carbon steel	Nickel plated
㉑	Rod end nut	Carbon steel	Nickel plated

### Replacement Parts

No.	Description	Material	Bore size(mm)/Part No.			
			20	25	32	40
㉒	Rod seal	NBR	PDU-8Z	PDU-10Z	PDU-12LZ	PDU-14Z

## Basic (B)

CM2B Bore size P — Stroke

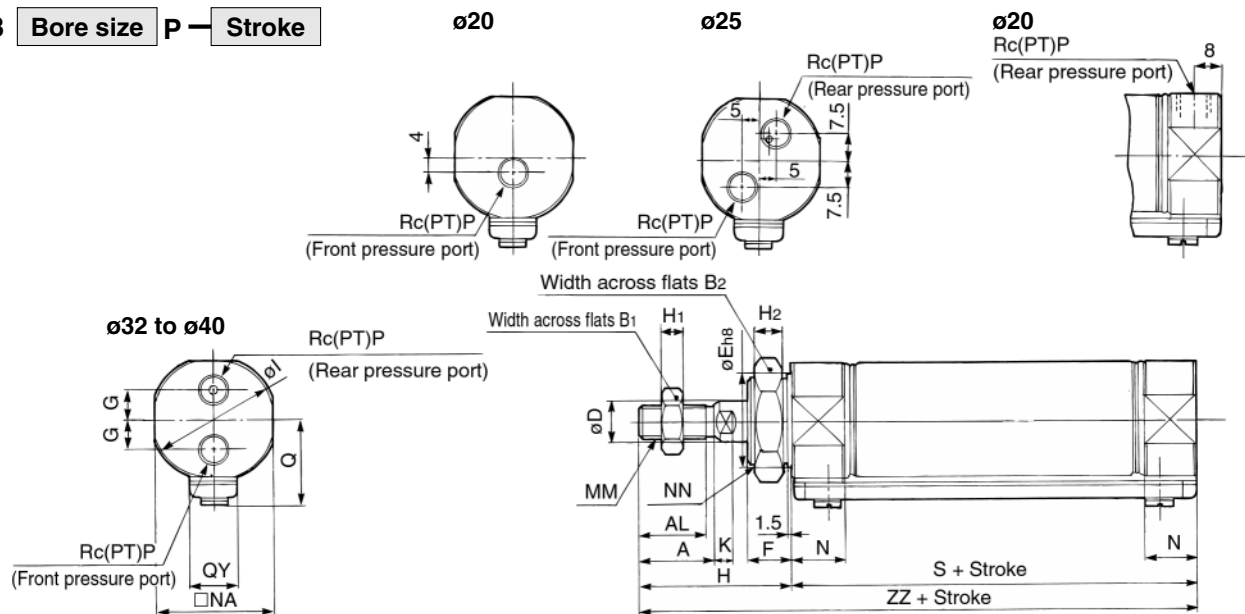

Bore size	A	AL	B1	B2	D	E	F	G	H	H1	H2	I	K	MM	N	NA	NN	P	Q	QY	S	ZZ
20	18	15.5	13	26	8	20 <sub>-0.033</sub>	13	—	41	5	8	28	5	M8 X 1.25	15	24	M20 X 1.5	1/8	19.8	14	62	103
25	22	19.5	17	32	10	26 <sub>-0.033</sub>	13	—	45	6	8	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	1/8	22	14	62	107
32	22	19.5	17	32	12	26 <sub>-0.033</sub>	13	9	45	6	8	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	1/8	25.8	16	64	109
40	24	21	22	41	14	32 <sub>-0.039</sub>	16	10.5	50	8	10	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	1/4	29.8	16	88	138

### Auto Switch Position

Refer to the auto switch position (at stroke end) for standard style (double acting/single rod) on p.1.4-21.



### Front Flange (F)

**CM2F** Bore size **P** — Stroke

**ø20**

**ø25**

**ø32 to ø40**

Technical drawing of the CM2F hydraulic cylinder showing various views and dimensions. The drawing includes a side view, a front view, and a rear view. Key dimensions and features are labeled:

- Front View (Left):** Shows the front pressure port (Rc(PT)P), rear pressure port (Rc(PT)P), and mounting holes. Dimensions include  $\phi I$ ,  $\phi O$ ,  $G$ ,  $Q$ ,  $QY$ , and  $\square NA$ .
- Side View (Middle):** Shows the cylinder body with dimensions  $\phi D$ ,  $MM$ ,  $AL$ ,  $A$ ,  $K$ ,  $H$ ,  $FT$ ,  $N$ ,  $1.5$ ,  $Width across flats \square NA$ ,  $S + Stroke$ , and  $ZZ + Stroke$ .
- Rear View (Right):** Shows the rear pressure port (Rc(PT)P) and mounting holes. Dimensions include  $Width across flats B1$ ,  $NN$ ,  $H1$ ,  $H2$ ,  $Width across flats B2$ ,  $FZ$ , and  $8$ .
- Mounting Holes:**
  - ø20 to ø32:** Shows mounting holes with dimensions  $C2$ ,  $FX$ ,  $FZ$ ,  $FB$ , and  $2-\phi FD$ .
  - ø40:** Shows mounting holes with dimensions  $FY$ ,  $4-\phi FD$ , and  $Mounting hole$ .

Bore	A	AL	B1	B2	C2	D	F	FB	FD	FT	FX	FY	FZ	G	H	H1	H2	I	K	MM	N	NA	NN	P	Q	QY	S	Z	ZZ
<b>20</b>	18	15.5	13	26	30	8	13	34	7	4	60	—	75	—	41	5	8	28	5	M8 X 1.25	15	24	M20 X 1.5	<sup>1</sup> / <sub>8</sub>	19.8	14	62	37	103
<b>25</b>	22	19.5	17	32	37	10	13	40	7	4	60	—	75	—	45	6	8	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	<sup>1</sup> / <sub>8</sub>	22	14	62	41	107
<b>32</b>	22	19.5	17	32	37	12	13	40	7	4	60	—	75	9	45	6	8	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	<sup>1</sup> / <sub>8</sub>	25.8	16	64	41	109
<b>40</b>	24	21	22	41	47.3	14	16	52	7	5	66	36	82	10.5	50	8	10	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	<sup>1</sup> / <sub>4</sub>	29.8	16	88	45	136

**CM2U** **Bore size** **P** — **Stroke**

[illegible]

Bore	A	AL	B1	B2	D	G	H	H1	I	K	MM	N	NA	NN	P	Q	QY	S	TD	TT	TX	TY	TZ	Z	ZZ
<b>20</b>	18	15.5	13	26	8	—	41	5	28	5	M8 X 1.25	15	24	M20 X 1.5	$\frac{1}{8}$	19.8	14	62	8	10	32	32	52	36	103
<b>25</b>	22	19.5	17	32	10	—	45	6	33.5	5.5	M10 X 1.25	15	30	M26 X 1.5	$\frac{1}{8}$	22	14	62	9	10	40	40	60	40	107
<b>32</b>	22	19.5	17	32	12	9	45	6	37.5	5.5	M10 X 1.25	15	34.5	M26 X 1.5	$\frac{1}{8}$	25.8	16	64	9	10	40	40	60	40	109
<b>40</b>	24	21	22	41	14	10.5	50	8	46.5	7	M14 X 1.5	21.5	42.5	M32 X 2	$\frac{1}{4}$	29.8	16	88	10	11	53	53	77	44.5	138