




VRLA Rechargeable Battery

BP8-6

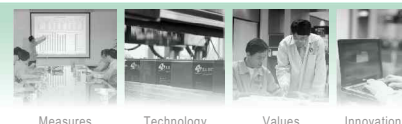

FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- Absorbent Glass Mat technology for efficient gas recombination.

APPLICATION

- UPS
- Fans
- Electronic Toy-Cars
- Emergency Lights
- Rechargeable Flashlights



SPECIFICATIONS

Nominal Voltage	6 V
Nominal Capacity	8.0Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	1350g(2.98lbs.)
Terminals	T1 (Faston Tab 187) T2 is optional
Internal Resistance	$\leq 12.5m\Omega$ (Fully Charged)
Max. Discharge Current	120 A (5 sec.)
Max. Charge Current	2.4 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS(UL 94-HB) BP8-6 Optional: Flame Retardant ABS(UL 94-V0) BP8-6FR



- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

Length

151±1.5 (5.94±0.06)

Width



34±1.5 (1.34±0.06)

Container Height


94±1.5 (3.70±0.06)

Total Height


100±2.0 (3.94±0.08)

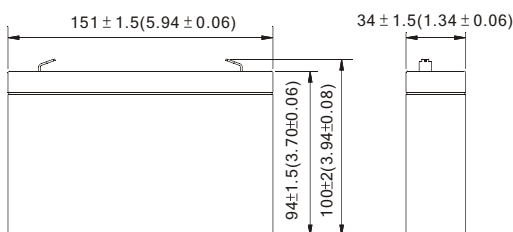

Terminal T1



Terminal T2



Constant power discharge characteristics at 25 °C/77 °F

Unit: W

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	144.6	106.5	85.3	50.8	29.1	11.66	8.04	4.49	2.36
1.75V	167.4	115.3	89.2	52.7	30.0	11.89	8.16	4.56	2.40
1.70V	177.9	119.5	92.0	53.9	30.5	12.00	8.20	4.58	2.41
1.65V	185.8	122.4	94.1	54.7	30.9	12.08	8.23	4.60	2.42
1.60V	192.0	124.8	96.0	55.2	31.2	12.16	8.26	4.60	2.42

Constant current discharge characteristics at 25 °C/77 °F

Unit: A

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	26.06	18.74	14.84	8.60	4.89	1.94	1.340	0.749	0.394
1.75V	30.71	20.31	15.52	8.93	5.04	1.98	1.360	0.760	0.400
1.70V	32.63	21.04	16.00	9.14	5.13	2.00	1.367	0.764	0.402
1.65V	34.10	21.54	16.37	9.26	5.19	2.01	1.372	0.766	0.403
1.60V	35.23	21.97	16.70	9.36	5.24	2.03	1.376	0.766	0.403

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.