

## Sensor/Actuator cable - SAC-4P- 2,0-542/M8 FS BK - 1406240

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/Actuator cable, 4-position, PVC, Yellow RAL 1021, Free cable end, on Socket straight M8, Cable length: 2 m



### Key commercial data

|                      |                                                                                                         |
|----------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit         | 1 PCE                                                                                                   |
| GTIN                 | <br>4 046356 798112 |
| Custom tariff number | 85444290                                                                                                |
| Country of origin    | UNITED STATES                                                                                           |

### Technical data

#### Dimensions

|                 |     |
|-----------------|-----|
| Length of cable | 2 m |
|-----------------|-----|

#### General

|                                 |                                      |
|---------------------------------|--------------------------------------|
| Rated current at 40°C           | 4 A                                  |
| Rated voltage                   | 30 V                                 |
| Number of positions             | 4                                    |
| Contact resistance              | ≤ 5 mΩ                               |
| Insulation resistance           | ≥ 100 MΩ                             |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket)     |
| Standards/regulations           | M8 plug-in connector IEC 61076-2-104 |
| Coding                          | A - standard                         |
| Surge voltage category          | II                                   |
| Pollution degree                | 3                                    |
| Degree of protection            | IP65                                 |

# Sensor/Actuator cable - SAC-4P- 2,0-542/M8 FS BK - 1406240

## Technical data

### General

|                             |                                             |
|-----------------------------|---------------------------------------------|
| Degree of protection        | IP67                                        |
| Degree of protection        | IP68                                        |
| Insertion/withdrawal cycles | ≥ 100                                       |
| Torque                      | 0.2 Nm (M8 plug-in connectors)              |
| Contact material            | CuSn                                        |
| Contact surface material    | Ni/Au                                       |
| Contact carrier material    | TPU GF                                      |
| Material of grip body       | TPU, hardly inflammable, self-extinguishing |
| Material, knurls            | Zinc die-cast, nickel-plated                |
| Sealing material            | NBR                                         |
| Status display              | No                                          |

### Line characteristics

|                                               |                                               |
|-----------------------------------------------|-----------------------------------------------|
| Cable type                                    | PVC yellow 105 °C                             |
| Cable type (abbreviation)                     | 542                                           |
| UL AWM style                                  | 2517 (105°C/300 V)                            |
| AWG signal line                               | 24                                            |
| Core diameter including insulation            | 1.12 mm ±0.03 mm                              |
| Wire colors                                   | brown, blue, black, white                     |
| Overall twist                                 | 4 wires, twisted                              |
| External sheath, color                        | yellow                                        |
| External cable diameter D                     | 4.4 mm ± 0.2 mm                               |
| Minimum bending radius, flexible installation | 8 x D                                         |
| Cable weight                                  | 25 kg/km                                      |
| Outer sheath, material                        | PVC                                           |
| Material conductor insulation                 | PVC                                           |
| Conductor material                            | Tin-plated Cu litz wires                      |
| Nominal voltage, cabel                        | 300 V                                         |
| Other resistance                              | UV resistant                                  |
| Ambient temperature (operation)               | -30 °C ... 105 °C (cable, fixed installation) |

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

## Sensor/Actuator cable - SAC-4P- 2,0-542/M8 FS BK - 1406240

### Classifications

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |

### Approvals

#### Approvals

#### Approvals

UL Listed / cUL Listed / cULus Listed

#### Ex Approvals

#### Approvals submitted

#### Approval details

|                                                                                               |       |
|-----------------------------------------------------------------------------------------------|-------|
| UL Listed  |       |
| Nominal current I <sub>N</sub>                                                                | 4 A   |
| Nominal voltage U <sub>N</sub>                                                                | 125 V |

## Sensor/Actuator cable - SAC-4P- 2,0-542/M8 FS BK - 1406240

### Approvals

|                                                                                              |       |
|----------------------------------------------------------------------------------------------|-------|
| cUL Listed  |       |
|                                                                                              |       |
| Nominal current I <sub>N</sub>                                                               | 4 A   |
| Nominal voltage U <sub>N</sub>                                                               | 125 V |

|                                                                                                |  |
|------------------------------------------------------------------------------------------------|--|
| cULus Listed  |  |
|------------------------------------------------------------------------------------------------|--|

### Accessories

#### Accessories

#### Protection and sealing elements

Screw plug - PROT-M 8 MS-PA-CHAIN - 1430860

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets



#### Tools

Torque screwdriver - TSD 02 SAC - 1208487



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

Tool - SAC BIT M8-D10 - 1208461




Nut for assembling sensor/actuator cables with M8 connector and for M8 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive

## Sensor/Actuator cable - SAC-4P- 2,0-542/M8 FS BK - 1406240


### Drawings

Schematic diagram




Pin assignment M8 socket, 4-pos., view female side

Dimensioned drawing



Socket M8 x 1, straight

Circuit diagram

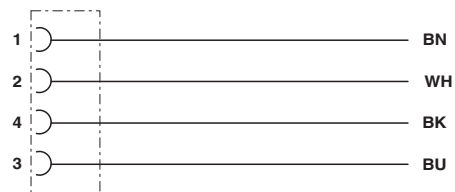

Contact assignment of M8/M12 plugs/sockets