

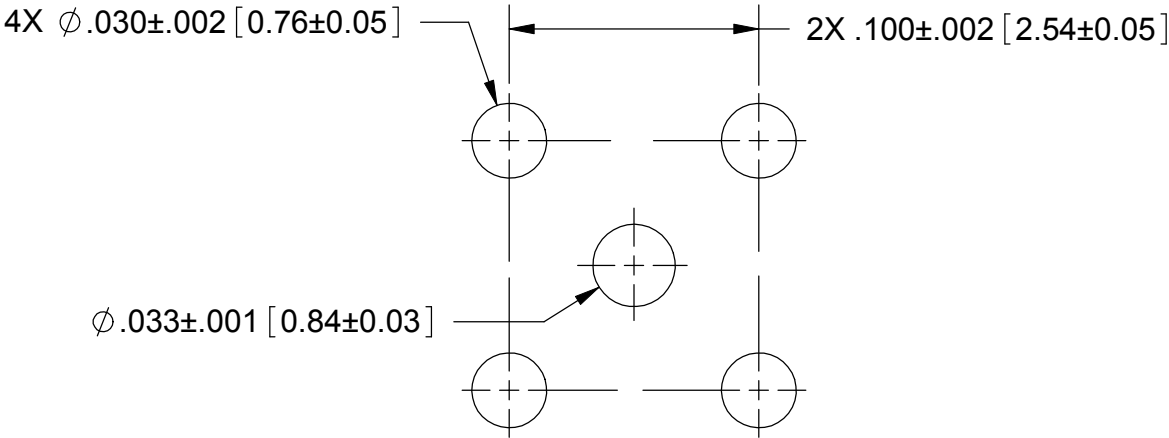


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 37960	01/11	STW

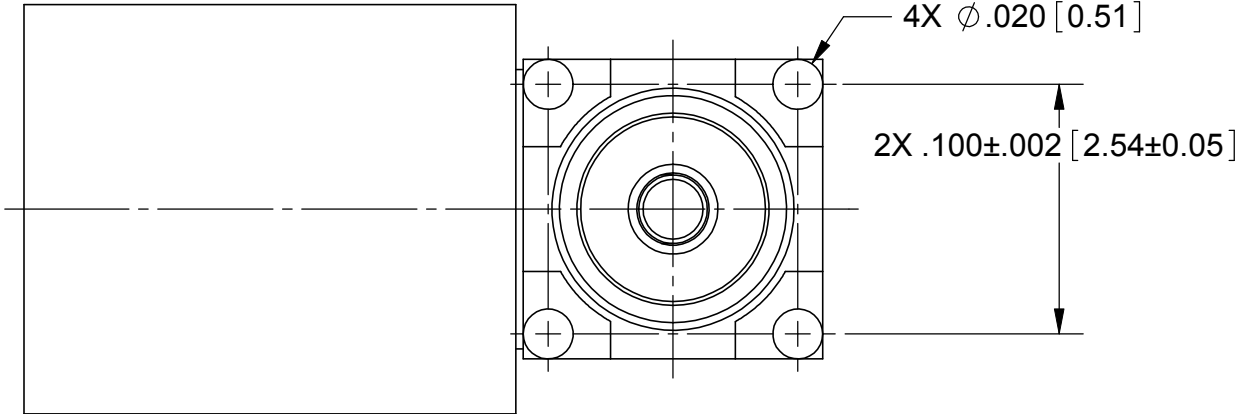

RECOMMENDED MOUNTING HOLE PATTERN

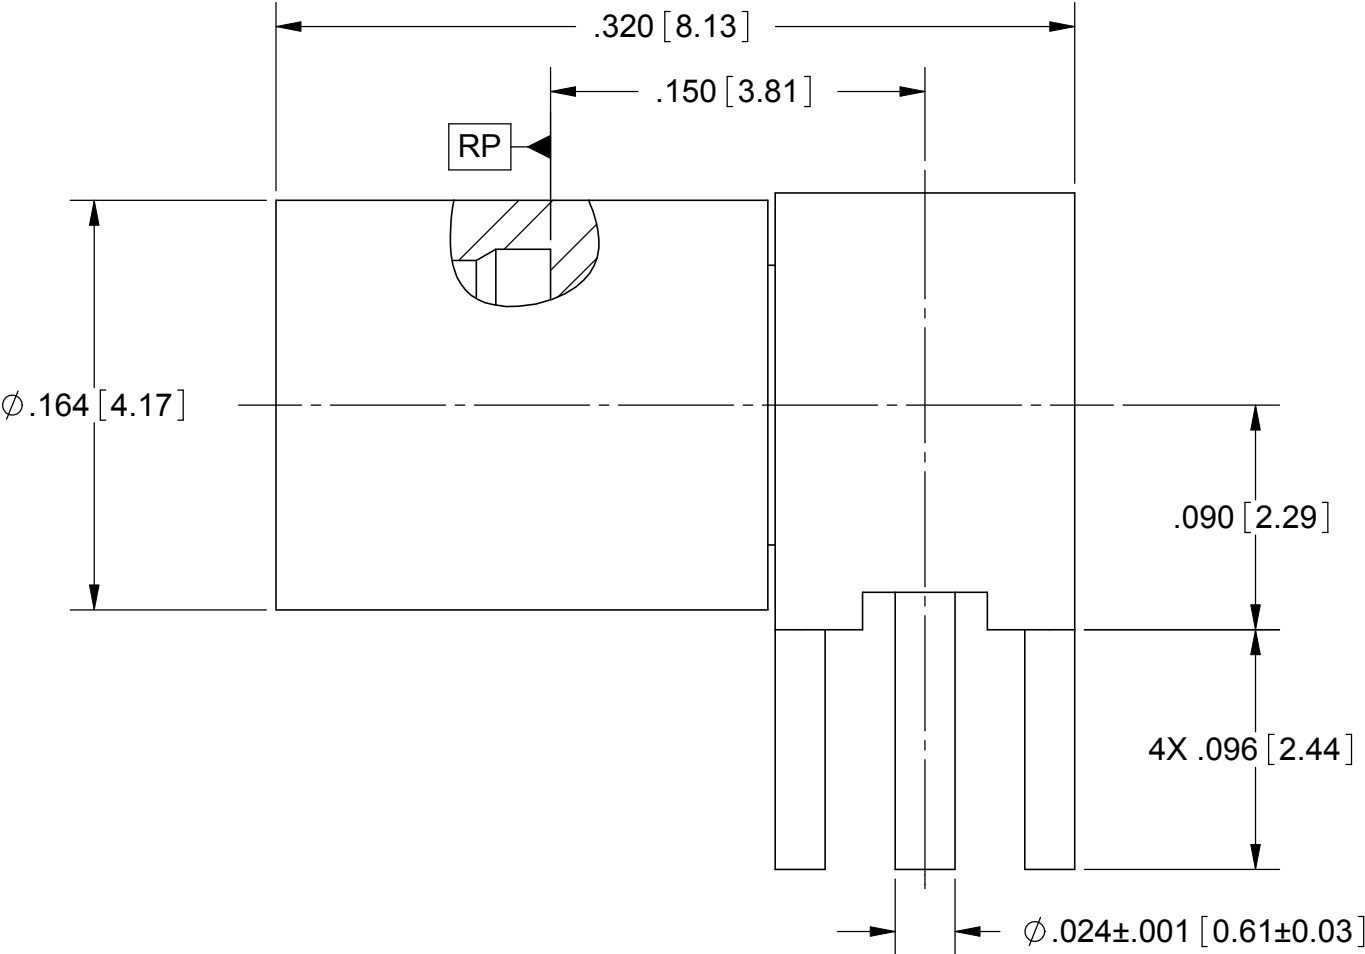

MATERIAL:

INTERFACE BODY:	STAINLESS STEEL ALLOY S30300, TYPE 303, COND. A PER AMS-5640
PC LEG BODY & CONTACT:	BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TD 04
INSULATOR:	PTFE PER ASTM D1710

FINISHES:

INTERFACE BODY:	PASSIVATED PER AMS-2700, TYPE 2
PC LEG BODY & CONTACT:	GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27; OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 20 GHz
V.S.W.R.:	1.35:1 DC TO 20 GHz
D.W.V.:	500 VRMS
INSULATION RES.:	5,000 MEGOHMS MINIMUM

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'
-----------	-----------	---